Chapter 9 Diversions

Contents

Figures

Exhibits

Chapter 9
Diversions

Introduction

A diversion is a channel with a supporting ridge on the lower side constructed across the slope (fig. 9-1). Diversions are used for one or more of the following purposes:

1. To divert water away from active gullies or critically eroding areas.
2. To supplement water management on conservation cropping or stripcropping systems.
3. To break up concentrations of water on long, gentle slopes and on undulating or warped land surfaces that are generally considered too flat or irregular for terracing.
4. To divert water away from farmsteads, agricultural waste systems, and other improvements.
5. To collect or direct water for water-spreading or water-harvesting systems.
6. To increase or decrease the drainage area above ponds.
7. To protect terrace systems by diverting water from the top terrace where topography, land use, or landownership prevents terracing the land above.
8. To intercept surface and shallow subsurface flow.
9. To protect flat lands from upland runoff and overland flow from adjacent areas (exhibit 9-1).
10. To control runoff and erosion on urban or developing areas, construction sites, and surface mine sites.
11. When vegetated, to act as a grass filter for reducing pollutants in runoff waters.

Requirements for Use

Any high sediment-producing area above a diversion should be controlled by good land use management or by structural measures to prevent damaging sediment accumulation in the diversion channel. Where it is not possible or desirable to establish land treatment measures on the watershed area above the diversion, the channel size must be increased to provide for sediment storage or provisions made for prompt and frequent maintenance. A stable channel must be designed with an adequate and stable outlet. Water diversion is recognized as legal according to local, state, and federal laws.

Planning Considerations

A preliminary site investigation is recommended to determine the feasibility of constructing a diversion. Such a survey includes the study of resource information such as soil maps, aerial photography, and contour maps; visual examination of potential alignment; occasional survey shots with a hand level or dumpy level; and estimating capacity from past work experience. A preliminary investigation should provide enough information to select a final alignment. If possible, consider more than one location and select the most practical, most aesthetic, and least damaging alternative. Consider outlet conditions, topography, vegetation, land use, cultural activities, visual quality, soil type, length of slope, and natural features (fig. 9-2).

Diversions used to intercept shallow subsurface flows in addition to surface runoff have a location and depth of cut based on the location of the seepage. Exploratory borings usually are required to determine the location of interceptors. Refer to the local drainage guide or local technical guide for additional information on the use of diversions for drainage. Subsurface drains may be needed in conjunction with the diversion. This is especially true when storage type diversions are used with underground outlets.

If a diversion is to be constructed to protect cropland from the runoff from grassland or forest land, it should be built close to the boundary between the two land uses (fig. 9-3). This is especially applicable where vegetated diversions can be used for hayland, pasture, or range.

If water is being diverted away from the head of a gully, it is important that the diversion is located far enough above the gully overfall so that stable slopes will exist after bank sloping and expected sloughing has taken place.

Diversions should be located so that the discharge empties on established disposal areas, natural out-

lets, grassed waterways, underground outlets, or water detention facilities for water conservation.

If diversions are used to protect flat land from upland runoff, they should be located at or near the base of the upland slope to divert the water before it can spread over the flat bottom land and so that the constructed side slopes blend into existing slopes or topography (fig. 9-4).

If buried utilities cross the proposed alignment, contact the utility companies to determine the exact location of underground services.

Locate the alignment so as not to damage important landscape elements, such as unique trees, geologic formations, or scenic features. Be sure the slope of the diversion doesn't interfere with adjacent land uses. Shallower and broader designs usually blend in better and are less disruptive.

Be aware of local and State regulations affecting diversions. If permits are required, the landowner usually is responsible for obtaining them.

Figure 9-1.—Typical diversions.

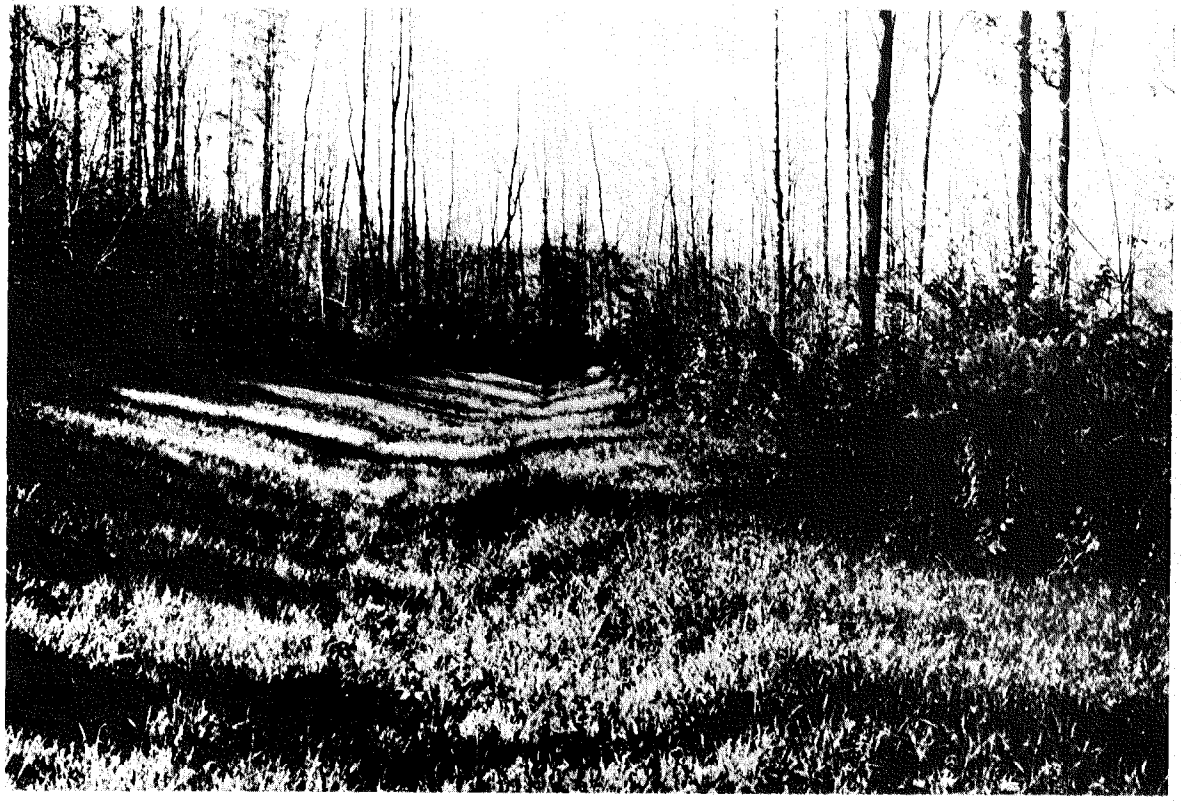

Figure 9-1.—Typical diversions (continued).

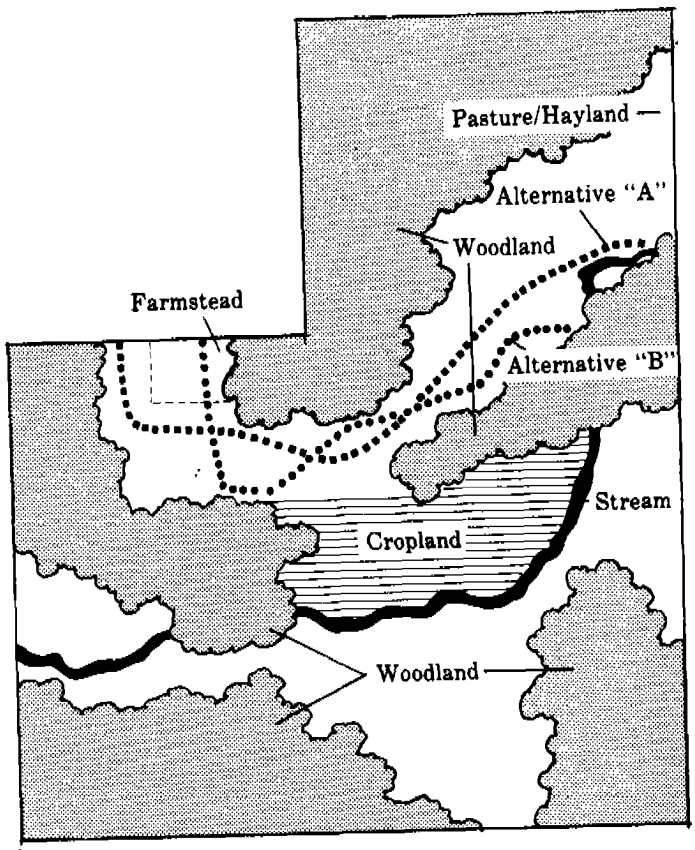

Figure 9-2.—Site survey information.

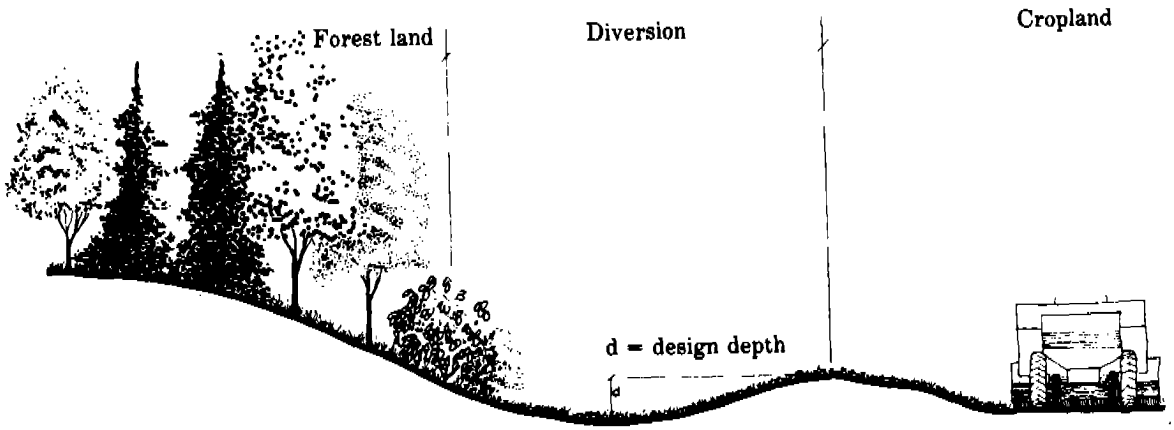

Figure 9-3.—Diversion at boundary of land uses.

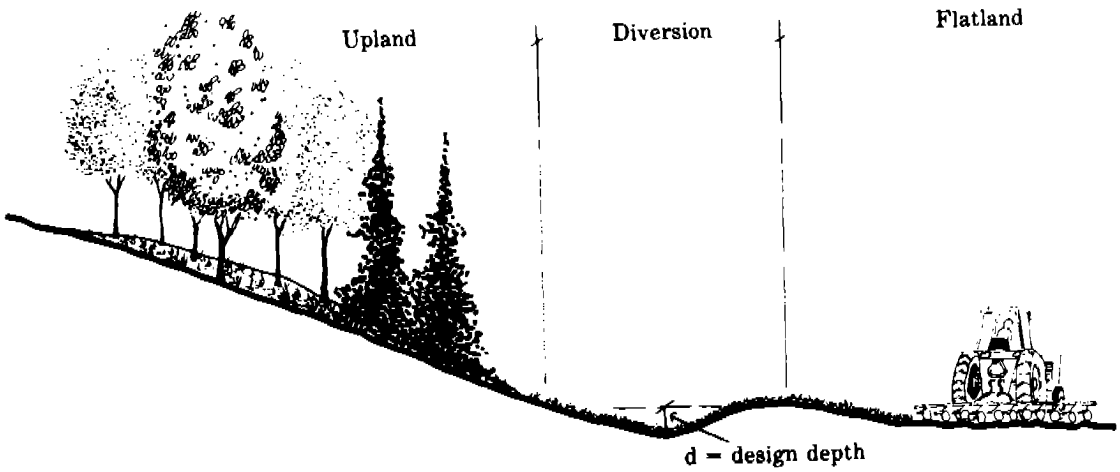

Figure 9-4.—Diversion at base of upland slope.

Engineering Surveys

Surveys for diversions normally consist of sample field notes for diversion design, layout, and construction and are shown in Soil Conservation Service Technical Release Number 62—Engineering Layout, Notes, Staking, and Calculations. Such notes are satisfactory if drainage areas are small, topography is relatively uniform, and elevations with respect to other structures are not significant. Standard forms or data sheets approved for field offices may be used to record field notes or diversions.

Hydrologic Investigations

Information on watershed area, design storm frequency and duration, and runoff estimates are important in determining the capacity of a diversion.

Determine the watershed area at the outlet of the diversion and at other points where it may be desirable to change the grade or cross section size. Obtain the runoff in cubic meters (feet) per second, at each design point for the frequency and duration storm selected. Refer to Chapter 2 of the Engineering Field Manual for procedure.

Soils Investigations

Determine the types of soil textures that will be encountered along the diversion. Soil textures are needed to determine retardance for permissible velocities and channel capacities.

General

There are three basic types of diversions: ridge diversions, channel diversions, and combination diversions. The ridge diversion (fig. 9-5) is located at the top of the slope to divert water from flowing down the slope. This type of diversion is constructed by placing fill to form a ridge, which creates a channel. The depth is measured from the bottom of the channel to the top of the ridge.

The channel diversion (fig. 9-6) is usually located at the base of a slope. It is constructed by excavating a channel. The spoil is spread or disposed of and is not used to form the channel. The depth is measured from the bottom of the channel to the low bank.

The combination type diversion (fig. 9-7) is constructed by pushing material from the channel to form a ridge. The depth is measured from the channel bottom to the top of the ridge.

The following design guidelines should be used to design permanent diversions.

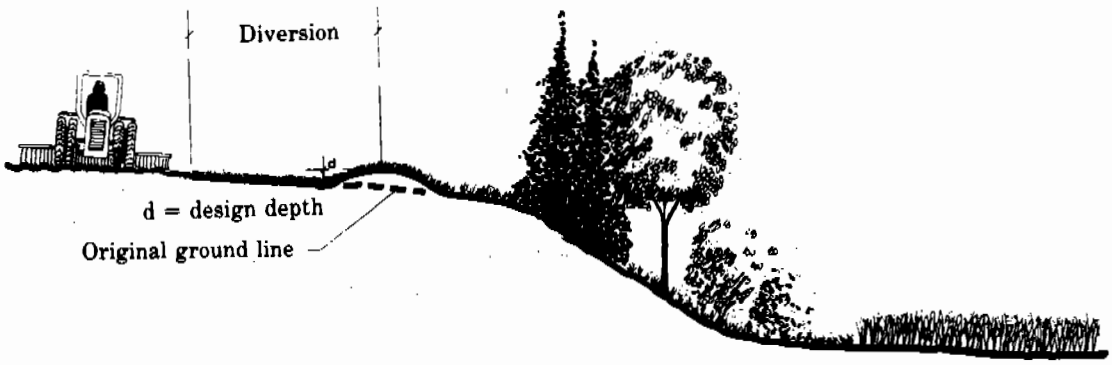

Figure 9-5.—Ridge diversion.

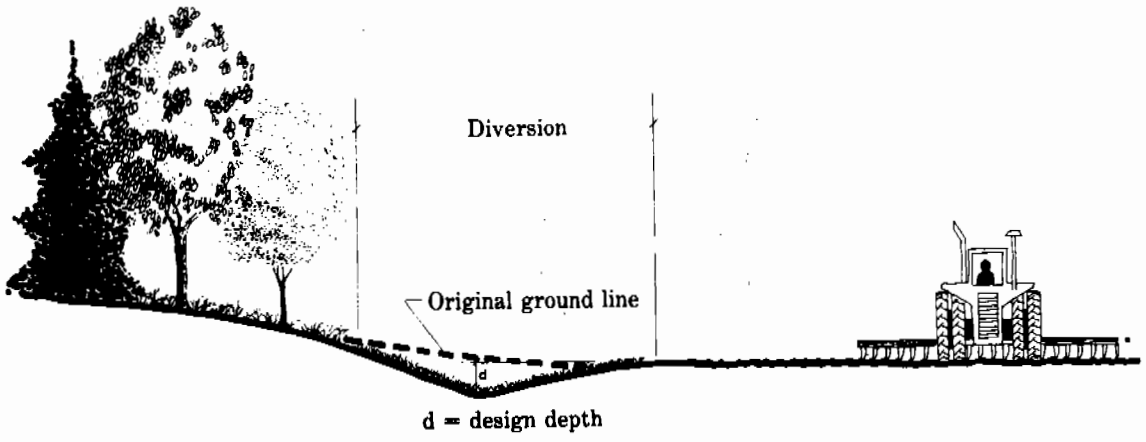

Figure 9-6.—Channel diversion.

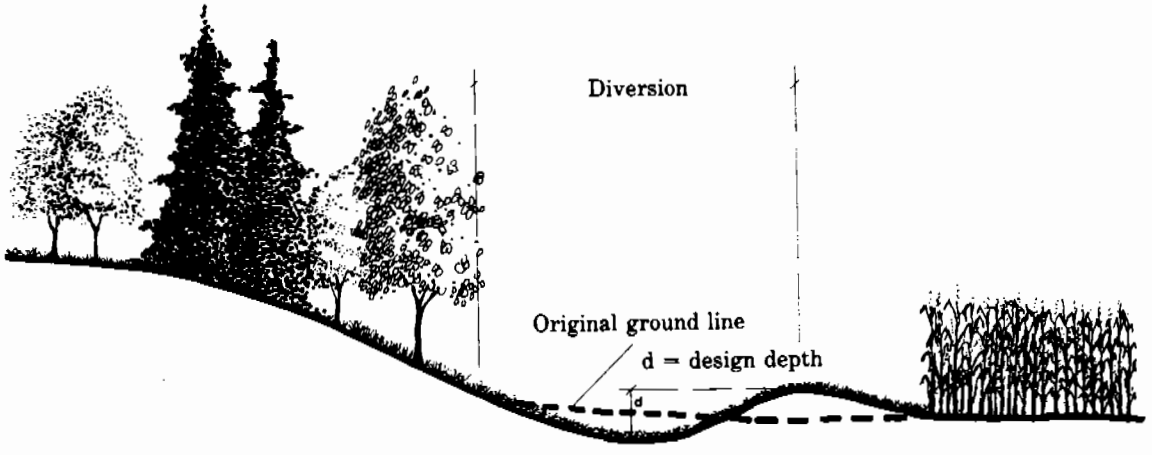

Figure 9-7.—Combination diversion.

Table 9-1.—Permissible velocities for diversions.

Soil texture	Permissible velocity				
	Bare channel	Retardance*	Channel Condition—Poor	Vegetation Condition—Fair	Vegetation Condition—Good
	m/s (ft/s)		m/s (ft/s)		
Sand, silt, sandy loam, and silty loam	0.45 (1.5)	B	0.61 (2.0)	0.91 (3.0)	1.22 (4.0)
		C	0.45 (1.5)	0.76 (2.5)	1.07 (3.5)
		D	0.45 (1.5)	0.61 (2.0)	0.91 (3.0)
Silty clay loam and sandy clay loam	0.61 (2.0)	B	0.91 (3.0)	1.22 (4.0)	1.52 (5.0)
		C	0.76 (2.5)	1.07 (3.5)	1.37 (5.0)
		D	0.61 (2.0)	0.91 (3.0)	1.22 (4.0)
Clay	0.76 (2.5)	B	1.07 (3.5)	1.52 (5.0)	1.83 (6.0)
		C	0.91 (3.0)	1.37 (4.5)	1.68 (5.5)
		D	0.76 (2.5)	1.22 (4.0)	1.52 (5.0)
Coarse gravel	1.52 (5.0)	B, C, or D	1.52 (5.0)	1.83 (6.0)	2.13 (7.0)
Cobbles and shale	1.83 (6.0)	B, C, or D	1.83 (6.0)	2.13 (7.0)	2.44 (8.0)

*The choice of retardance B, C, or D will depend on the vegetation and maintenance planned for the diversion channel. Refer to the Handbook for Channel Design, SCS-TP-61, or similar information in the field office technical guide, to select the vegetal retardance.

Velocities

Diversions should be planned and designed to fit the conditions of a particular site. The velocities should be kept as high as will be safe for the planned type of cover and the expected maintenance. Where permissible design velocities are not established in local standards and specifications, table 9-1 may be used as a guide in selecting design velocities, except in arid areas. Based on local experience, problem soils may require other limiting velocities. The permissible velocity should be selected on the basis of the soil horizon into which the channel is excavated and the planned vegetative treatment. The permissible velocity as described for vegetative linings is based on the vegetation having been established.

The choice of retardance C or D will depend on the vegetation and maintenance planned for the diversion channel. D retardance is for a good stand maintained at a 50- to 150-mm (2- to 6-in) height. C retardance is for channels with enough vegetation to cause a considerable resistance to the flow. The Handbook for Channel Design, SCS-TP-61, or similar information in the field office technical guide should be used in selecting the vegetal retardance.

Channel Cross Section

A typical diversion cross section consists of a channel and a supporting ridge. The channel may be parabolic, trapezoidal, or V shaped (fig. 9-8). Several factors are considered when selecting the type of channel cross section.

On steep slopes, narrow and deep channels may be required to reduce earth moving. Broad, shallow channels on gentle slopes are usually more desirable. If placed through woodland, narrow channels would be less damaging to vegetation.

The type of land use will also affect channel shape. In agricultural areas the channel dimensions should be adapted to farming equipment. Diversions which are easy to cross with equipment will be easier to maintain. Steep back diversions are not designed to be crossed by equipment and should be maintained in grass or woody vegetation. Diversions associated with residential developments or recreation areas should be designed to be safe and unintrusive.

The type of equipment available for construction should also be considered. For example, a tractor with a blade or bulldozer is often used to shape a parabolic channel and motor patrol graders on V-type channels.

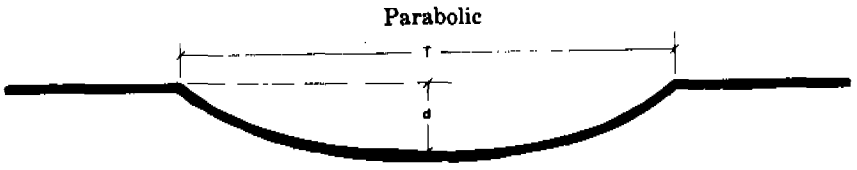

Cross-sectional area (A) = 2/3 Td

Design top width (T) = $\frac{1.5A}{d}$

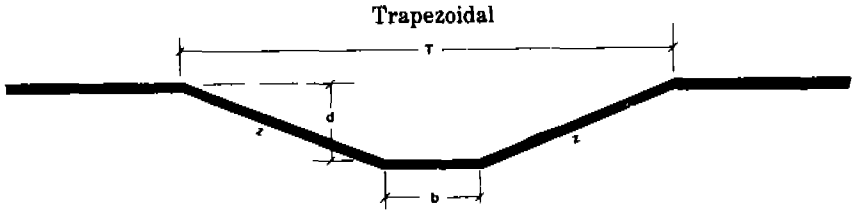

Cross-sectional area (A) = $bd + zd^2$

Design top width (T) = $b + 2dz$

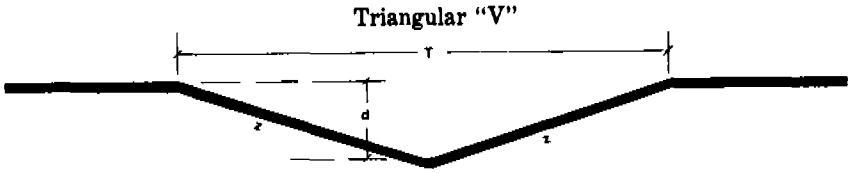

Cross-sectional area (A) = zd^2

Design top width (T) = $2dz$

d = design depth
b = design bottom width
z = side slope ratio

Figure 9-8.—Typical diversion cross sections.

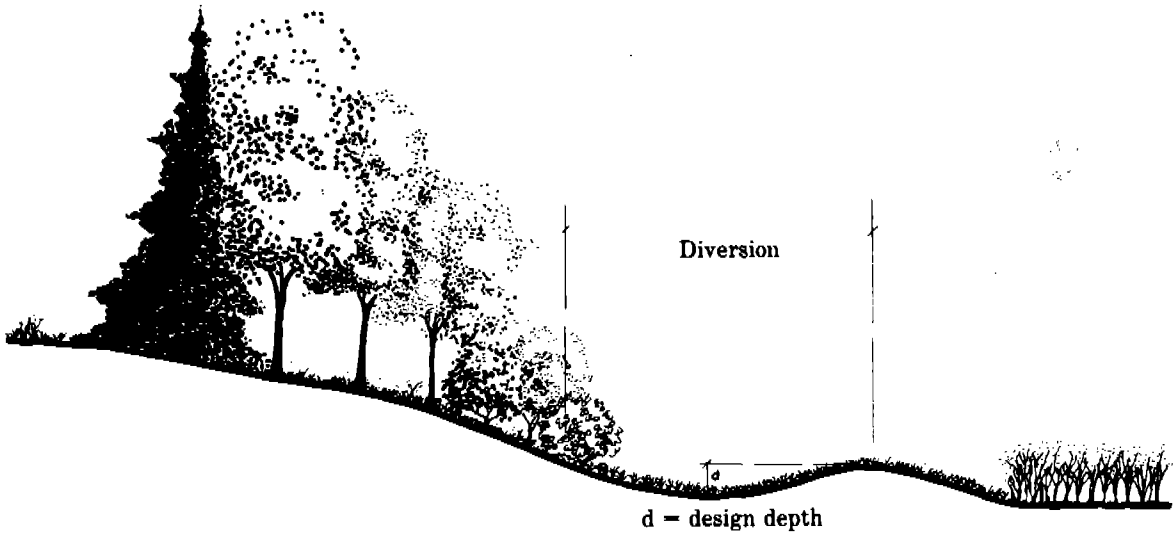

Figure 9-9.—Woody vegetation on back slope.

Grades

Grades should be selected to meet velocity, capacity, and lining requirements for the site. Variable grades may be needed to obtain more uniform cross sections and improve alignment. Refer to applicable local guides and standards for recommended diversion grades and conditions under which they are applicable.

Capacity

The minimum capacity should be that required to confine the peak runoff from the design storm plus required freeboard. The design storm and freeboard should comply with local standards or the guidelines in table 9-2.

The design of vegetative linings for capacity and stability should be in accordance with the principles given in the Handbook for Channel Design, SCS-TP-61; by using Manning's velocity equation given in Chapter 3 of this manual; or by using other approved procedures. Designs may be selected from the two tables included in this chapter which have been developed on the basis of SCS-TP-61.

Consider the type and growth habits of the vegetative lining and the expected quality of the stand to be obtained. This determines the retardance to be used for designing for capacity. Exhibit 7-2 in Chapter 7 can be used as a guide in classifying vegetal retardance.

Stability

Consider the possible future conditions of the vegetative lining based on natural succession and maintenance. In some cases the expected stand of vegetation is not attained, and frequently the vegetative stand will deteriorate under normal maintenance. Therefore, it is necessary to check the diversion design for stability against erosion. For example, assume that a diversion is to be built in a clay soil. The vegetation to be established with a good stand will produce a B retardance (exhibit 7-2 in Chapter 7). However, with the diversiion located on a pasture or range site that may be heavily grazed at times, the stand can be expected to be reduced to "fair" and the retardance to D. Table 9-1 shows that a clay soil with a vegetal retardance of B and a good stand has a permissible

Table 9-2.—Design frequency and freeboard requirement.

Diversion type	Typical area of protection	Twenty-four-hour design storm frequency	Minimum freeboard required
		years	*m(ft)*
Temporary	Construction areas (structures, roads, pipelines, etc.)	2	None
	Building sites	5	None
Permanent	Agricultural land	10	None
	Surface mine reclamation playfields--recreation areas	10	0.09 (0.3)
	Agricultural buildings, agricultural pollution abatement system, etc.	25	0.09 (0.3)
	Urban land areas, schools, industrial buildings, etc.	50	0.15 (0.5)

velocity of 1.8 m/s (6.0 ft/s). For soil that has a fair stand of vegetation that may be closely grazed at the time of critical runoff, the limiting velocity for stability is 1.2 m/s (4.0 ft/s) with D retardance.

Channel Lining

On sites where it is impossible to establish suitable permanent vegetation, or it is desired to determine the stability of the channel in an as-constructed condition, the design can be based on bare ground conditions. Site conditions may warrant designing the diversion with a protective lining such as riprap or concrete cellular blocks. Other procedures for designing lined channels should be used in these cases. An acceptable common method is to use Manning's equation with an "n" value appropriate for the lining material.

Steps in Designing a Diversion

Watershed area. Determine the watershed area at the outlet of the diversion and at such other points where it may be desirable to change the grade or the cross section size.

Runoff. Obtain the runoff in cubic meters (feet) per second at each design point for the frequency and duration storm selected. Refer to Chapter 2 of this manual for procedure.

Permissible velocity. Select the permissible velocity for the conditions anticipated by using the table or the local guides or standards. For some soils and land uses, it may be necessary to design the diversion based on bare channel velocities or as a lined channel.

Size of channel. After the runoff and the permissible velocity have been determined, the required size of a vegetated diversion channel can be determined from exhibits 9-1 to 9-4, depending on the shape of channel desired. These exhibits have been so designed that the planner has a choice of several different channel dimensions and gradients that will carry the same quantity of flow.

The land slope where the diversion is to be constructed must be taken into consideration when choosing a channel cross section. On the steeper slopes, narrow and deep channels may be required to reduce earth-moving quantities. Broad, shallow channels usually are applicable on the more gentle slopes. The wide, shallow section will be easier to cross with equipment.

Example Parabolic Diversion Design

Under the subheading "Capacity," page 9-10, assumptions of vegetation, soils, and maintenance were followed through exhibit 7-2 of this manual and table 9-1, resulting in the finding that—

1. The design of the diversion for capacity requirements would be based on B retardance; and
2. For the stability requirements, the velocity in the diversion channel would be based on D retardance, and it should not exceed 1.2 m/s (4.0 ft/s).

To continue this example, assume the following:

Channel grade = 1.0 percent

Runoff or Q = 1.8 m^3/s (65 ft^3/s)

Turn to exhibit 9-1, sheet 4, "Parabolic Diversion Design Chart," for grade = 1.0 percent.

Since the permissible velocity for a D retardance is 1.2 m/s (4.0 ft/s), find V_1 = 4.0 in the heading of the chart.

Follow down this column to the horizontal line for Q = 1.8 (65) and read—

T (top width)	= 5.5 m (18 ft)
d (depth)	= 0.64 m (2.1 ft)
V_2 (for B retardance)	= 0.76 m/s (2.5 ft/s)

Such a diversion, then, would have sufficient capacity to carry 1.8 m^3/s (65 ft^3/s) under retardance B conditions, and the velocity would not exceed 1.2 m/s (4.0 ft/s) for D retardance.

The dimensions obtained from exhibits 9-1 and 9-2 are for the designed flow conditions. Additional fill for freeboard and settlement should be added as required by site conditions and practice standards.

By moving horizontally to the left of the column, V_1 = 1.2 (4.0) on the same chart, it will be noted that there are several diversion designs based on D retardance that will carry 1.8 m^3/s (65 ft^3/s) at velocities less than 1.2 m/s (4.0 ft/s.)

Example Trapezoidal Diversion Design

With the rate of runoff determined as prescribed in Chapter 2, the required size of the diversion can be found directly by using exhibits 9-3 and 9-4. The choice of retardance C or D will depend upon the

vegetation and maintenance planned for the diversion channel. D retardance is for a good stand maintained at a height of 50 to 150 mm (2 to 6 in). C retardance is for channels with enough vegetation to cause a considerable resistance to the flow. The Handbook for Channel Design, SCS-TP-61, or similar information in the field office technical guide should be used in selecting the vegetal retardance.

To use the exhibits 9-3 and 9-4, determine the runoff Q as prescribed in Chapter 2. Select a bottom width to fit the method of construction and a grade to suit the site conditions. Directly under the bottom width and grade and in line with Q, read the depth of flow and cross-sectional area of the channel required. If the dimensions are undesirable, choose another bottom width or grade.

Given: 2.2 m^3/s (80 ft^3/s) is to be handled by a diversion on clay soil with a 5-percent field slope. It is to be constructed with a tractor that has a blade. The best layout has a channel grade of 0.3/100. It is to be vegetated with bermudagrass and be maintained at a height of 50 to 150 mm (2 to 6 in).

Solution: Vegetal retardance D is chosen. The tractor can construct 4:1 side slopes with a 3.0-m (10-ft) bottom. Enter exhibit 9-3, 4:1 side slopes, on the 2.2-m^3/s (80-ft^3/s) line.

Read across to the 3.0-m (10-ft) bottom width and 0.3-grade column. The diversion requires a 0.6-m (2.0-ft) depth of flow and a 3.3-m^2 (36-ft^2) area. In this example, if the freeboard desired is 0.15 m (0.5 ft), the overall ridge height will be 0.76 m (2.5 ft). Additional fill for settlement should be added as needed.

The velocity of flow $= \frac{Q}{A} = \frac{2.2}{3.3}\left(\frac{80}{36}\right) = 0.7$ m/s (2.2 ft/s).

This is a safe velocity for clay soils even under poor cover conditions. (See table 9-1.)

Layout

The layout of the diversion should begin at a key point, usually the outlet; but it may be a point determined by a building, property boundary, or a gully. On smooth, uniform slopes the stakes may be set 30 m (100 ft) apart; however, on abrupt changes in topography or on grades less than 1 percent, stakes are usually set on 15-m (50-ft) stations.

When the diversion outlets onto grassland or a broad, shallow waterway, allowance must be made for the depth of channel cut plus gradient in the last 15 to 30 m (50 to 100 ft) in order to outlet the water at ground level. On erosive soils, the last 15 to 30 m (50 to 100 ft) is sometimes constructed on zero grade to reduce erosion at the outlet section.

Adjustment and Marking

After the centerline has been staked, it is well to check and move some stakes, if necessary, to improve alignment. Ordinarily such adjustments are limited to about 0.15 m (6 in) of extra cut or fill. The staked line then may be marked with a plow or other means to make a continuous reference line.

Construction

Preparation of Site

A good time to build diversions is when the site has a good cover so that runoff and silting will be at a minimum. All ditches, or gullies, that are to be crossed should be filled and compacted before construction begins so as to prevent seepage through the ridge, prevent more than normal settlement, and facilitate construction. Any vegetation that would interfere with constructing a dense fill should be removed. Heavy sod should be thoroughly disked to obtain a good bond between the ridge and natural ground. Topsoil from cross sections should be salvaged for later use in improving vegetation or crop production on the completed diversion.

Allowance for Settlement

Settlement should be allowed for at the time of design. The amount will depend on soils, moisture

conditions, and type of construction equipment. Five percent of fill heights is common when scrapers or rubber-tired tractors are used and 10 percent when crawler tractors with blades are used.

Methods

Earth-moving equipment should be used to construct diversions. Construction usually should be done from the upper side of the ridge, using the staked line as the centerline of the diversion channel. However, on steep slopes it may be desirable to construct the diversion from the lower side in order to construct a steep backslope diversion.

Industrial Tractor With Blade

Industrial track and rubber-tired tractors with blades on the front are commonly used in the construction of diversions. Track-type tractors can be used on very rough, stony, or eroded soils. Old dead furrows and existing ditches can be filled as part of the diversion construction operations. The bladed tractors will operate under conditions where other types of equipment cannot function efficiently. The roughing-in is accomplished by making three or more "cuts" and "bucks" at right angles to the ridge, depending on the size of ridge required. After the roughing-in is completed, two rounds or more are made lengthwise to give final shape to the channel and the front and back slopes of the ridge.

Motor Patrol Grader

For diversions where earth is not to be transported along the channel, a motor patrol grader does an excellent job. A skilled operator can cut a channel true to grade with very little followup required to remove high and low spots in the channel.

Scrapers

Scrapers are desirable when it is necessary to transport earth more than 30 m (100 ft) from cut to fill areas. Scrapers work well in combination with either the bulldozer or grader. Front-end loaders in combination with dump trucks can sometimes be used in lieu of scrapers.

Other Equipment

Large farm tractors can be used as power units with attachments like plows, blades, or scrapers. They also can be used as supplemental units in combination with industrial tractors, motor patrol graders, and scrapers.

Checking Construction

The diversion should be checked for compliance with design and layout while the construction equipment is available to make necessary changes. The finished grade and ridge height should be checked throughout the length of the diversion and the cross section of the channel should be checked at several locations, including the location least likely to meet the design.

Establishment of Vegetation

Vegetation for erosion protection should be established as soon after construction as weather conditions permit. (Check technical guide for local planting dates.) Prepare a seedbed and seed with a mixture of grasses and legumes adapted to soil conditions and local climate. Most excavated areas will require fertilizers to establish good cover. If weather conditions are not favorable for permanent seeding, it may be necessary to use a temporary seeding, mulch, or lining. Irrigation may be needed for adequate germination and growth initially. When an immediate turf cover is desired or when establishing turf from seed is difficult, it may be necessary to use sod. Sodding by sprigging or broadcasting root stalks and stolons gives good results with bermudagrass and other grasses in favorable climates. In other areas, direct planting of sod is practical. Woody plantings may be appropriate on channel back slopes to improve screening, wildlife habitat, space definition, and climate control. Check technical guides for tree planting dates.

Outlets

The runoff collected by a diversion must be conveyed to a point of safe disposal or usage. An adequate vegetated, riprapped, paved, or underground outlet should be included as part of the design. (see Chaper 7 for vegetated waterways and Chapter 8 for underground outlets.) It is important that vegetated waterways be well established before diversions are constructed.

Maintenance

General

The success or failure of a properly designed and constructed diversion depends on a well-maintained channel and outlet. The vegetation in the diversion channel should be fertilized periodically. In arid areas irrigation may be needed to ensure adequate plant growth. It is important that the channel of a diversion used for intercepting seepage flow be maintained in short vegetative growth to prevent retardation of flow and to reduce seepage through the ridge. On diversions collecting heavy flows of seepage water, it may be necessary to install a subsurface drain or a riprapped center to carry the prolonged flows.

Care of Vegetation

Mowing, spraying, or grazing of vegetated diversion channels is essential to prevent weeds, briars, and brushy growth from obstructing flow. When woody growth gets too large, mowing becomes difficult and the diversion channel gradually becomes clogged. Diversions clogged with tall grass and brush encourage channel blockage and may cause seepage through the ridge or overtopping. Failure can result. Woody vegetation and tall grass may be left on the back slopes of diversions (fig. 9-9)

Removal of Sediment

The channel may require maintenance to remove small sediment deposits. However, if the deposits extend over long reaches or for the full length of the diversion, the channel should be reconstructed by using appropriate construction equipment.

Sediment should be disposed of properly. The waste can be stacked, spread, or removed from the site. Waste material can also be designed to be functional. It can screen undesirable views, buffer noise and wind, or improve the site's suitability for recreation.

Repair of Eroded Areas, Breaks, and Rodent Holes

Diversions left in permanent vegetation sometimes attract rodents and other burrowing animals. The ridge should be examined several times a year; if any eroded areas, breaks, or holes are observed, they should be repaired. Rodent control measures should be considered in maintenance plans.

Reseeding

Cultural operations should be parallel to the centerline of the channel when reseeding the diversion. Plowing should be done by back-furrowing on the ridge with a dead furrow in the channel. This method of plowing will maintain the ridge height required in the original design. Reseeding can also be done by conservation tillage methods.

Paving or Riprap

Displaced or damaged lining materials should be repaired promptly. This will reduce or prevent further degradation of the diversion lining.

Outlets

When the diversion outlet is a grassed waterway, the transition section is the most susceptible to erosion damage. Repairs should be made promptly to prevent gully erosion from advancing up the diversion channel. If vegetation proves inadequate in the transition section, it may be necessary to line this section of channel or construct a grade stabilization structure.

If the outlet is an underground outlet, it is important to keep it free from trash that may plug it and cause a failure.

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 0.25 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5																											
10																											
15																											
20																											
25	11.0	3.2	1.1																								
30	13.8	3.0	1.1																								
35	16.4	2.9	1.1																								
40	19.0	2.8	1.1																								
45	21.5	2.8	1.1	11.9	3.7	1.5																					
50	24.0	2.8	1.1	14.1	3.4	1.5																					
55	26.5	2.8	1.1	15.8	3.3	1.6																					
60	29.0	2.8	1.1	17.5	3.3	1.6																					
65	31.5	2.7	1.1	19.2	3.2	1.6	11.8	4.4	1.9																		
70	34.0	2.7	1.1	20.8	3.2	1.6	13.7	4.0	1.9																		
75	37.0	2.7	1.1	22.4	3.2	1.6	15.3	3.8	1.9																		
80	39.4	2.7	1.1	24.1	3.2	1.6	16.6	3.7	1.9																		
85	41.9	2.7	1.1	25.7	3.1	1.6	17.9	3.7	1.9																		
90	44.3	2.7	1.1	27.2	3.1	1.6	19.1	3.6	1.9																		
95	46.7	2.7	1.1	28.8	3.1	1.6	20.3	3.6	2.0																		
100	49.2	2.7	1.1	30.4	3.1	1.6	21.5	3.6	2.0																		
105	51.6	2.7	1.1	32.0	3.1	1.6	22.7	3.5	2.0																		
110	54.1	2.7	1.1	33.6	3.1	1.6	23.9	3.5	2.0	14.4	4.8	2.4															
115	56.5	2.7	1.1	35.1	3.1	1.6	25.1	3.5	2.0	15.7	4.6	2.4															
120	59.0	2.7	1.1	36.7	3.1	1.6	26.2	3.5	2.0	17.0	4.4	2.4															
125	61.4	2.7	1.1	38.3	3.1	1.6	27.3	3.5	2.0	17.9	4.3	2.4															
130	63.9	2.7	1.1	39.7	3.1	1.6	28.5	3.4	2.0	18.8	4.3	2.4															
135	66.3	2.7	1.1	41.3	3.1	1.6	29.7	3.4	2.0	19.7	4.2	2.4															
140	68.8	2.7	1.1	43.4	3.0	1.6	30.8	3.4	2.0	20.6	4.2	2.4															
145	71.2	2.7	1.1	44.9	3.0	1.6	32.0	3.4	2.0	21.5	4.1	2.4															
150	73.7	2.7	1.1	46.5	3.0	1.6	33.1	3.4	2.0	22.4	4.1	2.5															

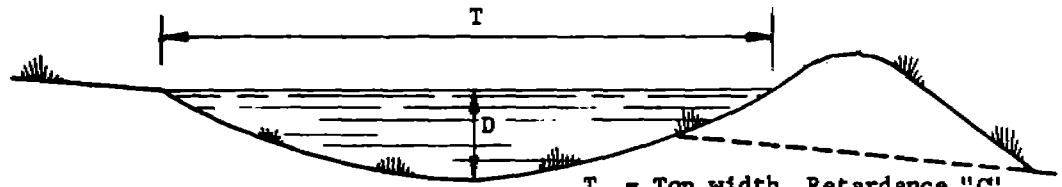

T = Top width, Retardance "C"
D = Depth, Retardance "C"
V_2 = Velocity, Retardance "C"
V_1 = Velocity, Retardance "D"

Note - Depth "D" does not include allowance for freeboard and settlement.

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

(SHEET 1 OF 14)

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 0.50 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5																											
10																											
15	10.0	2.2	1.0																								
20	13.7	2.1	1.0	8.4	2.7	1.3																					
25	17.4	2.1	1.0	11.3	2.4	1.4																					
30	21.0	2.0	1.0	13.9	2.3	1.4																					
35	24.6	2.0	1.1	16.4	2.3	1.4	10.7	2.8	1.8																		
40	28.5	2.0	1.0	18.9	2.3	1.4	12.6	2.7	1.8																		
45	31.9	2.0	1.1	21.4	2.3	1.4	14.4	2.6	1.8																		
50	35.5	2.0	1.1	23.9	2.2	1.4	16.2	2.5	1.8	9.9	3.4	2.2															
55	39.0	2.0	1.1	26.3	2.2	1.4	17.9	2.5	1.8	11.9	3.1	2.3															
60	42.5	2.0	1.1	28.8	2.2	1.4	19.7	2.5	1.8	13.2	3.0	2.3															
65	46.1	2.0	1.1	31.6	2.2	1.4	21.4	2.5	1.8	14.5	2.9	2.3															
70	49.6	2.0	1.1	34.0	2.2	1.4	23.1	2.5	1.8	15.8	2.9	2.3	11.0	3.6	2.6												
75	53.1	2.0	1.1	36.4	2.2	1.4	24.9	2.5	1.8	17.1	2.8	2.3	12.7	3.4	2.7												
80	56.6	2.0	1.1	38.8	2.2	1.4	26.6	2.5	1.8	18.4	2.8	2.3	13.7	3.3	2.7												
85	60.2	2.0	1.1	41.2	2.2	1.4	28.3	2.5	1.8	19.7	2.8	2.3	14.8	3.2	2.7												
90	63.7	2.0	1.1	43.6	2.2	1.4	30.0	2.4	1.8	20.9	2.8	2.3	15.9	3.2	2.7												
95	67.2	2.0	1.1	46.1	2.2	1.4	31.7	2.4	1.8	22.1	2.8	2.3	16.9	3.1	2.7												
100	70.8	2.0	1.1	48.5	2.2	1.4	33.7	2.4	1.8	23.4	2.8	2.3	17.9	3.1	2.7	12.3	3.9	3.1									
105	74.3	2.0	1.1	50.9	2.2	1.4	35.4	2.4	1.8	24.5	2.7	2.4	18.9	3.1	2.7	13.7	3.7	3.1									
110	77.8	2.0	1.1	53.3	2.2	1.4	37.1	2.4	1.8	25.8	2.7	2.4	19.9	3.1	2.7	14.6	3.6	3.1									
115	81.4	2.0	1.1	55.7	2.2	1.4	38.7	2.4	1.8	27.0	2.7	2.4	20.8	3.0	2.7	15.4	3.6	3.1									
120	84.9	2.0	1.1	58.1	2.2	1.4	40.4	2.4	1.9	28.2	2.7	2.4	21.8	3.0	2.7	16.3	3.5	3.1									
125	88.4	2.0	1.1	60.6	2.2	1.4	42.1	2.4	1.9	29.4	2.7	2.4	22.8	3.0	2.7	17.1	3.5	3.1									
130	92.0	2.0	1.1	63.0	2.2	1.4	43.8	2.4	1.9	30.6	2.7	2.4	23.8	3.0	2.7	17.9	3.5	3.1									
135	95.5	2.0	1.1	65.4	2.2	1.4	45.4	2.4	1.9	31.8	2.7	2.4	24.8	3.0	2.7	18.7	3.4	3.2									
140	99.0	2.0	1.1	67.8	2.2	1.4	47.1	2.4	1.9	33.1	2.7	2.4	25.7	3.0	2.8	19.4	3.4	3.2									
145	102.6	2.0	1.1	70.2	2.2	1.4	48.8	2.4	1.9	34.3	2.7	2.4	26.7	3.0	2.8	20.2	3.4	3.2	13.5	4.4	3.6						
150	106.1	2.0	1.1	72.6	2.2	1.4	50.5	2.4	1.9	35.5	2.7	2.4	27.7	3.0	2.8	21.0	3.4	3.2	14.4	4.3	3.6						

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 0.75 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5																											
10	8.3	1.9	1.0																								
15	12.9	1.8	1.0	8.4	2.1	1.3																					
20	17.4	1.7	1.0	11.6	2.0	1.3	7.2	2.6	1.6																		
25	22.2	1.7	1.0	14.8	1.9	1.3	10.0	2.2	1.7																		
30	26.6	1.7	1.0	17.9	1.9	1.3	12.3	2.1	1.7	7.7	2.9	2.0															
35	31.0	1.7	1.0	20.9	1.9	1.4	14.5	2.1	1.7	10.0	2.5	2.1															
40	35.4	1.7	1.0	23.9	1.9	1.4	16.7	2.1	1.7	11.8	2.4	2.1															
45	39.8	1.7	1.0	27.3	1.8	1.3	18.9	2.1	1.7	13.5	2.3	2.2	8.9	3.0	2.6												
50	44.2	1.7	1.0	30.3	1.8	1.3	21.1	2.0	1.7	15.1	2.3	2.2	10.7	2.7	2.6												
55	48.7	1.7	1.0	33.3	1.8	1.3	23.3	2.0	1.7	16.7	2.3	2.2	12.1	2.6	2.6												
60	53.1	1.7	1.0	36.3	1.8	1.4	25.5	2.0	1.7	18.4	2.3	2.2	13.4	2.6	2.6												
65	57.5	1.7	1.0	39.3	1.8	1.4	28.0	2.0	1.7	20.0	2.2	2.2	14.7	2.5	2.6	9.5	3.3	3.1									
70	61.9	1.7	1.0	42.3	1.8	1.4	30.2	2.0	1.7	21.6	2.2	2.2	15.9	2.5	2.6	11.2	3.0	3.1									
75	66.3	1.7	1.0	45.3	1.8	1.4	32.3	2.0	1.7	23.2	2.2	2.2	17.2	2.5	2.6	12.3	2.9	3.1									
80	70.7	1.7	1.0	48.3	1.8	1.4	34.4	2.0	1.7	24.8	2.2	2.2	18.4	2.5	2.6	13.3	2.9	3.1									
85	75.2	1.7	1.0	51.4	1.8	1.4	36.6	2.0	1.7	26.3	2.2	2.2	19.6	2.5	2.6	14.3	2.8	3.1	10.2	3.6	3.4						
90	79.6	1.7	1.0	54.4	1.8	1.4	38.7	2.0	1.7	27.9	2.2	2.2	20.8	2.4	2.7	15.3	2.8	3.1	11.4	3.4	3.5						
95	84.0	1.7	1.0	57.4	1.8	1.4	40.9	2.0	1.7	29.5	2.2	2.2	22.0	2.4	2.7	16.3	2.8	3.1	12.7	3.2	3.5						
100	88.4	1.7	1.0	60.4	1.8	1.4	43.0	2.0	1.7	31.4	2.2	2.2	23.2	2.4	2.7	17.2	2.8	3.1	13.5	3.2	3.5						
105	92.8	1.7	1.0	63.4	1.8	1.4	45.1	2.0	1.7	33.0	2.2	2.2	24.4	2.4	2.7	18.2	2.7	3.2	14.4	3.1	3.5						
110	97.2	1.7	1.0	66.4	1.8	1.4	47.3	2.0	1.7	34.6	2.2	2.2	25.6	2.4	2.7	19.1	2.7	3.2	15.2	3.1	3.5						
115	101.7	1.7	1.0	69.4	1.8	1.4	49.4	2.0	1.7	36.1	2.2	2.2	26.8	2.4	2.7	20.0	2.7	3.2	16.0	3.0	3.5	11.6	3.8	3.9			
120	106.1	1.7	1.0	72.5	1.8	1.4	51.6	2.0	1.7	37.7	2.2	2.2	28.0	2.4	2.7	21.0	2.7	3.2	16.8	3.0	3.5	12.6	3.6	3.9			
125	110.5	1.7	1.0	75.5	1.8	1.4	53.7	2.0	1.7	39.2	2.2	2.2	29.2	2.4	2.7	21.9	2.7	3.2	17.6	3.0	3.5	13.7	3.5	3.9			
130	114.9	1.7	1.0	78.5	1.8	1.4	55.8	2.0	1.7	40.8	2.2	2.2	30.4	2.4	2.7	22.8	2.7	3.2	18.4	3.0	3.6	14.4	3.4	3.9			
135	119.3	1.7	1.0	81.5	1.8	1.4	58.0	2.0	1.7	42.4	2.2	2.2	31.6	2.4	2.7	23.8	2.7	3.2	19.1	2.9	3.6	15.1	3.4	4.0			
140	123.7	1.7	1.0	84.5	1.8	1.4	60.1	2.0	1.7	43.9	2.2	2.2	32.8	2.4	2.7	24.7	2.7	3.2	19.9	2.9	3.6	15.8	3.4	4.0			
145	128.2	1.7	1.0	87.5	1.8	1.4	62.3	2.0	1.7	45.5	2.2	2.2	34.5	2.4	2.7	25.6	2.7	3.2	20.7	2.9	3.6	16.5	3.3	4.0			
150	132.6	1.7	1.0	90.6	1.8	1.4	64.4	2.0	1.7	47.1	2.2	2.2	35.7	2.4	2.7	26.5	2.6	3.2	21.5	2.9	3.6	17.1	3.3	4.0			

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 1.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5																											
10	9.7	1.6	1.0	6.2	2.0	1.2																					
15	14.8	1.5	1.0	10.2	1.7	1.3	6.5	2.2	1.5																		
20	20.2	1.5	1.0	13.8	1.7	1.3	9.6	1.9	1.6																		
25	25.1	1.5	1.0	17.4	1.7	1.3	12.2	1.9	1.6	8.5	2.2	2.0															
30	30.1	1.5	1.0	21.0	1.6	1.3	14.9	1.8	1.7	10.6	2.1	2.1															
35	35.1	1.5	1.0	24.7	1.6	1.3	17.5	1.8	1.7	12.6	2.0	2.1	8.9	2.4	2.5												
40	40.1	1.5	1.0	28.2	1.6	1.3	20.0	1.8	1.7	14.5	2.0	2.1	10.5	2.3	2.5												
45	45.1	1.5	1.0	31.7	1.6	1.3	22.5	1.8	1.7	16.4	2.0	2.1	12.1	2.2	2.5	9.2	2.8	2.9									
50	50.2	1.5	1.0	35.2	1.6	1.3	25.4	1.8	1.7	18.3	2.0	2.1	13.6	2.2	2.5	10.0	2.6	2.9									
55	55.2	1.5	1.0	38.8	1.6	1.3	27.9	1.8	1.7	20.3	1.9	2.1	15.1	2.2	2.5	11.2	2.5	3.0									
60	60.2	1.5	1.0	42.3	1.6	1.3	30.4	1.8	1.7	22.2	1.9	2.1	16.6	2.1	2.5	12.4	2.4	3.0									
65	65.2	1.5	1.0	45.8	1.6	1.3	32.9	1.8	1.7	24.0	1.9	2.1	18.0	2.1	2.5	13.6	2.4	3.0	8.9	3.1	3.5						
70	70.2	1.5	1.0	49.3	1.6	1.3	35.5	1.8	1.7	25.9	1.9	2.1	19.5	2.1	2.6	14.8	2.4	3.0	10.6	2.8	3.5						
75	75.2	1.5	1.0	52.8	1.6	1.3	38.0	1.8	1.7	28.2	1.9	2.1	20.9	2.1	2.6	16.0	2.3	3.0	11.5	2.8	3.5						
80	80.2	1.5	1.0	56.3	1.6	1.3	40.5	1.8	1.7	30.0	1.9	2.1	22.3	2.1	2.6	17.1	2.3	3.0	12.5	2.7	3.5						
85	85.2	1.5	1.0	59.8	1.6	1.3	43.0	1.8	1.7	31.9	1.9	2.1	23.7	2.1	2.6	18.3	2.3	3.0	13.5	2.7	3.6	9.8	3.3	3.9			
90	90.2	1.5	1.0	63.3	1.6	1.3	45.6	1.8	1.7	33.6	1.9	2.1	25.2	2.1	2.6	19.4	2.3	3.1	14.4	2.6	3.6	10.9	3.1	3.9			
95	95.2	1.5	1.0	66.9	1.6	1.3	48.1	1.8	1.7	35.5	1.9	2.1	26.6	2.1	2.6	20.5	2.3	3.1	15.3	2.6	3.6	12.0	3.0	3.9			
100	100.2	1.5	1.0	70.4	1.6	1.3	50.6	1.8	1.7	37.4	1.9	2.1	28.0	2.1	2.6	21.6	2.3	3.1	16.2	2.6	3.6	12.9	2.9	4.0			
105	105.3	1.5	1.0	73.9	1.6	1.3	53.1	1.8	1.7	39.2	1.9	2.1	29.8	2.1	2.6	22.8	2.3	3.1	17.1	2.6	3.6	13.7	2.9	4.0	10.8	3.4	4.3
110	110.3	1.5	1.0	77.4	1.6	1.3	55.7	1.8	1.7	41.1	1.9	2.1	31.3	2.1	2.6	23.9	2.3	3.1	18.0	2.6	3.6	14.4	2.9	4.0	12.0	3.2	4.3
115	115.3	1.5	1.0	80.9	1.6	1.3	58.2	1.8	1.7	42.9	1.9	2.1	32.7	2.1	2.6	25.0	2.3	3.1	18.9	2.5	3.6	15.2	2.8	4.0	12.7	3.2	4.3
120	120.3	1.5	1.0	84.4	1.6	1.3	60.7	1.8	1.7	44.8	1.9	2.1	34.1	2.1	2.6	26.1	2.2	3.1	19.7	2.5	3.6	16.0	2.8	4.0	13.4	3.1	4.3
125	125.3	1.5	1.0	88.0	1.6	1.3	63.2	1.8	1.7	46.7	1.9	2.1	35.5	2.1	2.6	27.2	2.2	3.1	20.6	2.5	3.6	16.8	2.8	4.0	14.1	3.1	4.3
130	130.3	1.5	1.0	91.5	1.6	1.3	65.8	1.8	1.7	48.5	1.9	2.1	36.9	2.1	2.6	28.4	2.2	3.1	21.5	2.5	3.6	17.4	2.8	4.0	14.8	3.1	4.3
135	135.3	1.5	1.0	95.0	1.6	1.3	68.3	1.8	1.7	50.4	1.9	2.1	38.3	2.1	2.6	29.5	2.2	3.1	22.4	2.5	3.6	18.2	2.8	4.0	15.5	3.0	4.3
140	140.3	1.5	1.0	98.5	1.6	1.3	70.8	1.8	1.7	52.2	1.9	2.1	39.7	2.0	2.6	30.6	2.2	3.1	23.2	2.5	3.6	18.9	2.7	4.0	16.1	3.0	4.4
145	145.3	1.5	1.0	102.0	1.6	1.3	73.3	1.8	1.7	54.1	1.9	2.1	41.1	2.0	2.6	32.1	2.2	3.0	24.1	2.5	3.6	19.7	2.7	4.0	16.8	3.0	4.4
150	150.3	1.5	1.0	105.5	1.6	1.3	75.9	1.8	1.7	56.0	1.9	2.1	42.5	2.0	2.6	33.2	2.2	3.0	25.0	2.5	3.6	20.4	2.7	4.1	17.5	2.9	4.4

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 1.25 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	5.0	1.8	0.8																								
10	11.1	1.4	0.9	7.4	1.6	1.2																					
15	16.9	1.4	1.0	11.6	1.5	1.3	8.1	1.8	1.6																		
20	22.8	1.4	0.9	15.6	1.5	1.3	11.1	1.7	1.6	7.8	2.0	1.9															
25	28.4	1.4	1.0	19.9	1.5	1.3	14.1	1.7	1.6	10.1	1.9	2.0	6.8	2.4	2.3												
30	34.1	1.4	1.0	23.8	1.5	1.3	17.0	1.6	1.6	12.4	1.8	2.0	9.0	2.1	2.4												
35	39.8	1.4	1.0	27.8	1.5	1.3	19.8	1.6	1.6	14.6	1.8	2.0	10.8	2.0	2.4	7.4	2.5	2.8									
40	45.4	1.4	1.0	31.7	1.5	1.3	23.0	1.6	1.6	16.8	1.8	2.0	12.5	2.0	2.5	9.3	2.3	2.9									
45	51.1	1.4	1.0	35.6	1.5	1.3	25.8	1.6	1.6	19.0	1.8	2.0	14.2	1.9	2.5	10.7	2.2	2.9									
50	56.8	1.4	1.0	39.5	1.5	1.3	28.7	1.6	1.6	21.1	1.7	2.0	15.9	1.9	2.5	12.1	2.1	2.9	8.7	2.6	3.3						
55	62.5	1.4	1.0	43.5	1.5	1.3	31.5	1.6	1.6	23.6	1.7	2.0	17.6	1.9	2.5	13.4	2.1	2.9	10.2	2.4	3.4						
60	68.1	1.4	1.0	47.4	1.5	1.3	34.4	1.6	1.6	25.7	1.7	2.0	19.2	1.9	2.5	14.7	2.1	2.9	11.3	2.4	3.4						
65	73.8	1.4	1.0	51.4	1.5	1.3	37.2	1.6	1.6	27.9	1.7	2.0	20.9	1.9	2.5	16.1	2.1	2.9	12.4	2.3	3.4	9.0	2.9	3.8			
70	79.5	1.4	1.0	55.3	1.5	1.3	40.1	1.6	1.6	30.0	1.7	2.0	22.5	1.9	2.5	17.4	2.1	2.9	13.5	2.3	3.4	10.3	2.7	3.8			
75	85.2	1.4	1.0	59.2	1.5	1.3	43.0	1.6	1.6	32.1	1.7	2.0	24.1	1.9	2.5	18.6	2.0	3.0	14.6	2.3	3.4	11.3	2.6	3.8			
80	90.8	1.4	1.0	63.2	1.5	1.3	45.8	1.6	1.6	34.2	1.7	2.0	26.1	1.9	2.5	19.9	2.0	3.0	15.7	2.2	3.4	12.2	2.5	3.9			
85	96.5	1.4	1.0	67.1	1.5	1.3	48.7	1.6	1.6	36.4	1.7	2.0	27.7	1.8	2.5	21.2	2.0	3.0	16.7	2.2	3.4	13.1	2.5	3.9			
90	102.2	1.4	1.0	71.1	1.5	1.3	51.5	1.6	1.6	38.5	1.7	2.0	29.3	1.8	2.5	22.5	2.0	3.0	17.7	2.2	3.5	14.0	2.5	3.9	10.1	3.1	4.4
95	107.9	1.4	1.0	75.0	1.5	1.3	54.4	1.6	1.6	40.6	1.7	2.0	30.9	1.8	2.5	23.8	2.0	3.0	18.8	2.2	3.5	14.9	2.5	3.9	11.3	2.9	4.4
100	113.5	1.4	1.0	79.0	1.5	1.3	57.2	1.6	1.6	42.8	1.7	2.0	32.6	1.8	2.5	25.1	2.0	3.0	19.8	2.2	3.5	15.8	2.4	3.9	12.1	2.8	4.4
105	119.2	1.4	1.0	82.9	1.5	1.3	60.1	1.6	1.6	44.9	1.7	2.0	34.2	1.8	2.5	26.4	2.0	3.0	20.8	2.2	3.5	16.6	2.4	3.9	12.8	2.8	4.4
110	124.9	1.4	1.0	86.9	1.5	1.3	63.0	1.6	1.6	47.0	1.7	2.0	35.8	1.8	2.5	27.6	2.0	3.0	21.9	2.2	3.5	17.5	2.4	3.9	13.6	2.8	4.4
115	130.6	1.4	1.0	90.8	1.5	1.3	65.8	1.6	1.6	49.2	1.7	2.0	37.4	1.8	2.5	29.3	2.0	3.0	22.9	2.2	3.5	18.3	2.4	3.9	14.3	2.7	4.4
120	136.2	1.4	1.0	94.8	1.5	1.3	68.7	1.6	1.6	51.3	1.7	2.0	39.0	1.8	2.5	30.5	2.0	3.0	23.9	2.2	3.5	19.2	2.4	3.9	15.0	2.7	4.4
125	141.9	1.4	1.0	98.7	1.5	1.3	71.5	1.6	1.6	53.4	1.7	2.0	40.6	1.8	2.5	31.8	2.0	3.0	25.0	2.2	3.5	20.0	2.4	3.9	15.8	2.7	4.4
130	147.6	1.4	1.0	102.7	1.5	1.3	74.4	1.6	1.6	55.6	1.7	2.0	42.3	1.8	2.5	33.1	2.0	3.0	26.0	2.2	3.5	20.9	2.4	3.9	16.4	2.7	4.5
135	153.3	1.4	1.0	106.6	1.5	1.3	77.3	1.6	1.6	57.7	1.7	2.0	43.9	1.8	2.5	34.3	2.0	3.0	27.0	2.2	3.5	21.7	2.4	3.9	17.1	2.6	4.5
140	158.9	1.4	1.0	110.5	1.5	1.3	80.1	1.6	1.6	59.8	1.7	2.0	45.5	1.8	2.5	35.6	2.0	3.0	28.0	2.2	3.5	22.6	2.4	3.9	17.8	2.6	4.5
145	164.6	1.4	1.0	114.5	1.5	1.3	83.0	1.6	1.6	62.0	1.7	2.0	47.1	1.8	2.5	36.9	2.0	3.0	29.1	2.2	3.5	23.4	2.4	3.9	18.5	2.6	4.5
150	170.3	1.4	1.0	118.4	1.5	1.3	85.8	1.6	1.6	64.1	1.7	2.0	48.8	1.8	2.5	38.1	2.0	3.0	30.1	2.2	3.5	24.3	2.3	4.0	19.2	2.6	4.5

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 1.50 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	5.9	1.5	0.9																								
10	12.4	1.3	0.9	8.3	1.5	1.2	5.5	1.9	1.5																		
15	18.9	1.3	0.9	12.8	1.4	1.2	9.1	1.6	1.6	6.2	1.9	1.9															
20	25.1	1.3	0.9	17.2	1.4	1.2	12.4	1.5	1.6	9.0	1.7	1.9	6.0	2.2	2.2												
25	31.4	1.3	0.9	21.8	1.4	1.2	15.6	1.5	1.6	11.5	1.7	2.0	8.4	1.9	2.4												
30	37.7	1.3	0.9	26.1	1.4	1.2	18.8	1.5	1.6	14.0	1.6	2.0	10.4	1.8	2.4	7.6	2.1	2.8									
35	43.9	1.3	0.9	30.4	1.4	1.2	22.2	1.5	1.6	16.4	1.6	2.0	12.3	1.8	2.4	9.2	2.0	2.8									
40	50.2	1.3	0.9	34.8	1.4	1.3	25.3	1.5	1.6	18.8	1.6	2.0	14.2	1.8	2.4	10.8	2.0	2.8	7.8	2.4	3.2						
45	56.5	1.3	0.9	39.1	1.4	1.3	28.5	1.5	1.6	21.2	1.6	2.0	16.1	1.7	2.4	12.3	1.9	2.9	9.4	2.2	3.3						
50	62.7	1.3	0.9	43.5	1.4	1.3	31.7	1.5	1.6	23.9	1.6	2.0	17.9	1.7	2.4	13.8	1.9	2.9	10.6	2.1	3.3						
55	69.0	1.3	0.9	47.8	1.4	1.3	34.8	1.5	1.6	26.2	1.6	2.0	19.8	1.7	2.4	15.3	1.9	2.9	11.9	2.1	3.3	9.1	2.4	3.7			
60	75.3	1.3	0.9	52.1	1.4	1.3	38.0	1.5	1.6	28.6	1.6	2.0	21.6	1.7	2.4	16.7	1.9	2.9	13.1	2.1	3.3	10.1	2.4	3.8			
65	81.5	1.3	0.9	56.5	1.4	1.3	41.1	1.5	1.6	31.0	1.6	2.0	23.8	1.7	2.4	18.2	1.9	2.9	14.3	2.0	3.3	11.2	2.3	3.8			
70	87.8	1.3	0.9	60.8	1.4	1.3	44.3	1.5	1.6	33.3	1.6	2.0	25.6	1.7	2.4	19.6	1.8	2.9	15.5	2.0	3.3	12.2	2.3	3.8	9.2	2.7	4.2
75	94.1	1.3	0.9	65.2	1.4	1.3	47.4	1.5	1.6	35.7	1.6	2.0	27.4	1.7	2.4	21.0	1.8	2.9	16.6	2.0	3.4	13.2	2.2	3.8	10.3	2.6	4.2
80	100.3	1.3	0.9	69.5	1.4	1.3	50.6	1.5	1.6	38.1	1.6	2.0	29.1	1.7	2.4	22.5	1.8	2.9	17.8	2.0	3.4	14.2	2.2	3.8	11.2	2.5	4.3
85	106.6	1.3	0.9	73.8	1.4	1.3	53.7	1.5	1.6	40.5	1.6	2.0	30.9	1.7	2.4	23.9	1.8	2.9	18.9	2.0	3.4	15.2	2.2	3.8	12.1	2.5	4.3
90	112.9	1.3	0.9	78.2	1.4	1.3	56.9	1.5	1.6	42.8	1.6	2.0	32.7	1.7	2.4	25.7	1.8	2.9	20.1	2.0	3.4	16.1	2.2	3.9	12.9	2.4	4.3
95	119.1	1.3	0.9	82.5	1.4	1.3	60.0	1.5	1.6	45.2	1.6	2.0	34.5	1.7	2.4	27.1	1.8	2.9	21.2	2.0	3.4	17.0	2.2	3.9	13.8	2.4	4.3
100	125.4	1.3	0.9	86.9	1.4	1.3	63.2	1.5	1.6	47.6	1.6	2.0	36.3	1.7	2.4	28.5	1.8	2.9	22.4	2.0	3.4	18.0	2.2	3.9	14.6	2.4	4.3
105	131.7	1.3	0.9	91.2	1.4	1.3	66.4	1.5	1.6	50.0	1.6	2.0	38.1	1.7	2.4	29.9	1.8	2.9	23.5	2.0	3.4	19.0	2.1	3.9	15.4	2.4	4.3
110	138.0	1.3	0.9	95.5	1.4	1.3	69.5	1.5	1.6	52.3	1.6	2.0	40.0	1.7	2.4	31.3	1.8	2.9	24.7	2.0	3.4	19.9	2.1	3.9	16.2	2.3	4.3
115	144.2	1.3	0.9	99.9	1.4	1.3	72.7	1.5	1.6	54.7	1.6	2.0	41.8	1.7	2.4	32.8	1.8	2.9	25.8	2.0	3.4	20.9	2.1	3.9	17.0	2.3	4.3
120	150.5	1.3	0.9	104.2	1.4	1.3	75.8	1.5	1.6	57.1	1.6	2.0	43.6	1.7	2.4	34.2	1.8	2.9	27.0	2.0	3.4	21.8	2.1	3.9	17.8	2.3	4.4
125	156.8	1.3	0.9	108.6	1.4	1.3	79.0	1.5	1.6	59.5	1.6	2.0	45.4	1.7	2.4	35.6	1.8	2.9	28.5	2.0	3.4	22.7	2.1	3.9	18.6	2.3	4.4
130	163.0	1.3	0.9	112.9	1.4	1.3	82.2	1.5	1.6	61.8	1.6	2.0	47.2	1.7	2.4	37.0	1.8	2.9	29.6	2.0	3.4	23.7	2.1	3.9	19.3	2.3	4.4
135	169.3	1.3	0.9	117.2	1.4	1.3	85.3	1.5	1.6	64.2	1.6	2.0	49.0	1.7	2.4	38.4	1.8	2.9	30.8	1.9	3.4	24.6	2.1	3.9	20.1	2.3	4.4
140	175.6	1.3	0.9	121.6	1.4	1.3	88.5	1.5	1.6	66.6	1.6	2.0	50.8	1.7	2.4	39.8	1.8	2.9	31.9	1.9	3.4	25.6	2.1	3.9	20.9	2.3	4.4
145	181.8	1.3	0.9	125.9	1.4	1.3	91.6	1.5	1.6	69.0	1.6	2.0	52.6	1.7	2.4	41.3	1.8	2.9	33.0	1.9	3.4	26.5	2.1	3.9	21.7	2.3	4.4
150	188.1	1.3	0.9	130.3	1.4	1.3	94.8	1.5	1.6	71.3	1.6	2.0	54.4	1.7	2.4	42.7	1.8	2.9	34.2	1.9	3.4	27.4	2.1	3.9	22.5	2.3	4.4

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 1.75 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	6.5	1.3	0.9																								
10	13.5	1.2	0.9	9.1	1.4	1.2	6.4	1.6	1.5																		
15	20.5	1.2	0.9	13.9	1.3	1.2	10.0	1.4	1.6	7.2	1.7	1.9															
20	27.3	1.2	0.9	18.8	1.3	1.2	13.6	1.4	1.6	10.0	1.6	1.9	7.3	1.8	2.3												
25	34.1	1.2	0.9	23.5	1.3	1.2	17.0	1.4	1.6	12.7	1.5	1.9	9.5	1.7	2.3	6.8	2.0	2.7									
30	40.9	1.2	0.9	28.2	1.3	1.2	20.7	1.4	1.6	15.4	1.5	1.9	11.6	1.7	2.3	8.7	1.9	2.8									
35	47.7	1.2	0.9	32.8	1.3	1.2	24.1	1.4	1.6	17.9	1.5	2.0	13.6	1.6	2.4	10.4	1.8	2.8	7.9	2.1	3.2						
40	54.5	1.2	0.9	37.5	1.3	1.2	27.5	1.4	1.6	20.8	1.5	1.9	15.7	1.6	2.4	12.1	1.8	2.8	9.3	2.0	3.2						
45	61.3	1.2	0.9	42.2	1.3	1.2	30.9	1.4	1.6	23.4	1.5	1.9	17.7	1.6	2.4	13.7	1.8	2.8	10.7	1.9	3.3	7.9	2.3	3.7			
50	68.1	1.2	0.9	46.9	1.3	1.2	34.4	1.4	1.6	26.0	1.5	1.9	19.7	1.6	2.4	15.3	1.7	2.8	12.0	1.9	3.3	9.3	2.2	3.7			
55	74.9	1.2	0.9	51.6	1.3	1.2	37.8	1.4	1.6	28.5	1.5	1.9	22.1	1.6	2.3	16.9	1.7	2.8	13.3	1.9	3.3	10.5	2.1	3.7	7.5	2.7	4.1
60	81.7	1.2	0.9	56.2	1.3	1.2	41.2	1.4	1.6	31.1	1.5	2.0	24.0	1.6	2.3	18.5	1.7	2.8	14.6	1.9	3.3	11.6	2.1	3.7	9.0	2.4	4.1
65	88.5	1.2	0.9	60.9	1.3	1.2	44.6	1.4	1.6	33.7	1.5	2.0	26.0	1.6	2.4	20.1	1.7	2.8	15.9	1.9	3.3	12.7	2.1	3.7	10.0	2.3	4.2
70	95.4	1.2	0.9	65.6	1.3	1.2	48.1	1.4	1.6	36.3	1.5	2.0	28.0	1.6	2.4	21.6	1.7	2.9	17.2	1.8	3.3	13.8	2.0	3.8	11.0	2.3	4.2
75	102.2	1.2	0.9	70.3	1.3	1.2	51.5	1.4	1.6	38.9	1.5	2.0	30.0	1.6	2.4	23.2	1.7	2.9	18.4	1.8	3.3	14.8	2.0	3.8	11.9	2.2	4.2
80	109.0	1.2	0.9	75.0	1.3	1.2	54.9	1.4	1.6	41.5	1.5	2.0	32.0	1.6	2.4	25.1	1.7	2.8	19.7	1.8	3.3	15.8	2.0	3.8	12.8	2.2	4.2
85	115.8	1.2	0.9	79.6	1.3	1.2	58.3	1.4	1.6	44.1	1.5	2.0	34.0	1.6	2.4	26.6	1.7	2.8	21.0	1.8	3.3	16.9	2.0	3.8	13.7	2.2	4.2
90	122.6	1.2	0.9	84.3	1.3	1.2	61.8	1.4	1.6	46.6	1.5	2.0	36.0	1.6	2.4	28.2	1.7	2.8	22.2	1.8	3.3	17.9	2.0	3.8	14.6	2.2	4.3
95	129.4	1.2	0.9	89.0	1.3	1.2	65.2	1.4	1.6	49.2	1.5	2.0	37.9	1.6	2.4	29.8	1.7	2.8	23.5	1.8	3.3	19.0	2.0	3.8	15.5	2.2	4.3
100	136.2	1.2	0.9	93.7	1.3	1.2	68.6	1.4	1.6	51.8	1.5	2.0	39.8	1.6	2.4	31.3	1.7	2.8	24.8	1.8	3.3	20.0	2.0	3.8	16.3	2.1	4.3
105	143.0	1.2	0.9	98.4	1.3	1.2	72.1	1.4	1.6	54.4	1.5	2.0	41.8	1.6	2.4	32.9	1.7	2.8	26.4	1.8	3.3	21.1	2.0	3.8	17.2	2.1	4.3
110	149.8	1.2	0.9	103.1	1.3	1.2	75.5	1.4	1.6	57.0	1.5	2.0	43.8	1.6	2.4	34.4	1.7	2.8	27.6	1.8	3.3	22.1	2.0	3.8	18.1	2.1	4.3
115	156.6	1.2	0.9	107.7	1.3	1.2	78.9	1.4	1.6	59.6	1.5	2.0	45.8	1.6	2.4	36.0	1.7	2.8	28.9	1.8	3.3	23.1	2.0	3.8	19.0	2.1	4.3
120	163.4	1.2	0.9	112.4	1.3	1.2	82.3	1.4	1.6	62.2	1.5	2.0	47.8	1.6	2.4	37.6	1.7	2.8	30.1	1.8	3.3	24.2	1.9	3.8	19.8	2.1	4.3
125	170.3	1.2	0.9	117.1	1.3	1.2	85.8	1.4	1.6	64.8	1.5	2.0	49.8	1.6	2.4	39.1	1.7	2.9	31.4	1.8	3.3	25.2	1.9	3.8	20.7	2.1	4.3
130	177.1	1.2	0.9	121.8	1.3	1.2	89.2	1.4	1.6	67.3	1.5	2.0	51.8	1.6	2.4	40.7	1.7	2.9	32.6	1.8	3.3	26.2	1.9	3.8	21.5	2.1	4.3
135	183.9	1.2	0.9	126.5	1.3	1.2	92.6	1.4	1.6	69.9	1.5	2.0	53.8	1.6	2.4	42.2	1.7	2.9	33.9	1.8	3.3	27.3	1.9	3.8	22.4	2.1	4.3
140	190.7	1.2	0.9	131.2	1.3	1.2	96.1	1.4	1.6	72.5	1.5	2.0	55.7	1.6	2.4	43.8	1.7	2.9	35.1	1.8	3.3	28.7	1.9	3.8	23.3	2.1	4.3
145	197.5	1.2	0.9	135.8	1.3	1.2	99.5	1.4	1.6	75.1	1.5	2.0	57.7	1.6	2.4	45.3	1.7	2.9	36.4	1.8	3.3	29.7	1.9	3.8	24.1	2.1	4.3
150	204.3	1.2	0.9	140.5	1.3	1.2	102.9	1.4	1.6	77.7	1.5	2.0	59.7	1.6	2.4	46.9	1.7	2.9	37.6	1.8	3.3	30.7	1.9	3.8	25.0	2.1	4.3

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 2.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	7.1	1.2	0.9																								
10	14.7	1.2	0.9	9.5	1.3	1.2	7.0	1.4	1.5																		
15	22.0	1.2	0.9	14.5	1.3	1.2	10.8	1.4	1.5	8.0	1.5	1.9	5.5	1.9	2.1												
20	29.3	1.2	0.9	19.6	1.2	1.2	14.6	1.3	1.5	10.9	1.5	1.9	8.1	1.6	2.3	5.5	2.1	2.6									
25	36.6	1.2	0.9	24.4	1.2	1.2	18.5	1.3	1.5	13.8	1.4	1.9	10.4	1.6	2.3	7.9	1.8	2.7									
30	43.9	1.2	0.9	29.3	1.2	1.2	22.2	1.3	1.6	16.6	1.4	1.9	12.7	1.5	2.3	9.7	1.7	2.7	7.3	2.0	3.1						
35	51.2	1.2	0.9	34.2	1.2	1.2	25.8	1.3	1.6	19.6	1.4	1.9	14.9	1.5	2.3	11.5	1.7	2.7	8.9	1.9	3.2						
40	58.5	1.2	0.9	39.0	1.2	1.2	29.5	1.3	1.6	22.4	1.4	1.9	17.1	1.5	2.3	13.3	1.6	2.8	10.4	1.8	3.2	8.0	2.1	3.6			
45	65.8	1.2	0.9	43.9	1.2	1.2	33.2	1.3	1.6	25.2	1.4	1.9	19.3	1.5	2.3	15.0	1.6	2.8	11.8	1.8	3.2	9.2	2.0	3.7			
50	73.1	1.2	0.9	48.8	1.2	1.2	36.8	1.3	1.6	28.0	1.4	1.9	21.7	1.5	2.3	16.7	1.6	2.8	13.2	1.8	3.2	10.5	1.9	3.7	7.9	2.3	4.1
55	80.4	1.2	0.9	53.6	1.2	1.2	40.5	1.3	1.6	30.7	1.4	1.9	23.9	1.5	2.3	18.5	1.6	2.8	14.6	1.7	3.2	11.7	1.9	3.7	9.2	2.2	4.1
60	87.7	1.2	0.9	58.5	1.2	1.2	44.2	1.3	1.6	33.5	1.4	1.9	26.0	1.5	2.3	20.2	1.6	2.8	16.0	1.7	3.2	12.8	1.9	3.7	10.2	2.1	4.1
65	95.0	1.2	0.9	63.4	1.2	1.2	47.9	1.3	1.6	36.3	1.4	1.9	28.2	1.5	2.3	22.1	1.6	2.8	17.4	1.7	3.3	14.0	1.9	3.7	11.3	2.1	4.2
70	102.3	1.2	0.9	68.2	1.2	1.2	51.6	1.3	1.6	39.1	1.4	1.9	30.3	1.5	2.3	23.8	1.6	2.8	18.8	1.7	3.3	15.2	1.9	3.7	12.3	2.1	4.2
75	109.6	1.2	0.9	73.1	1.2	1.2	55.2	1.3	1.6	41.9	1.4	1.9	32.5	1.5	2.3	25.5	1.6	2.8	20.1	1.7	3.3	16.2	1.8	3.7	13.2	2.0	4.2
80	116.9	1.2	0.9	78.0	1.2	1.2	58.9	1.3	1.6	44.7	1.4	1.9	34.6	1.5	2.3	27.2	1.6	2.8	21.5	1.7	3.3	17.4	1.8	3.8	14.2	2.0	4.2
85	124.2	1.2	0.9	82.9	1.2	1.2	62.6	1.3	1.6	47.4	1.4	1.9	36.8	1.5	2.3	28.9	1.6	2.8	22.9	1.7	3.3	18.5	1.8	3.8	15.1	2.0	4.2
90	131.5	1.2	0.9	87.7	1.2	1.2	66.3	1.3	1.6	50.2	1.4	1.9	39.0	1.5	2.3	30.6	1.6	2.8	24.6	1.7	3.2	19.6	1.8	3.8	16.1	2.0	4.2
95	138.8	1.2	0.9	92.6	1.2	1.2	69.9	1.3	1.6	53.0	1.4	1.9	41.1	1.5	2.3	32.3	1.6	2.8	25.9	1.7	3.3	20.8	1.8	3.8	17.0	2.0	4.2
100	146.1	1.2	0.9	97.5	1.2	1.2	73.6	1.3	1.6	55.8	1.4	1.9	43.3	1.5	2.3	34.0	1.6	2.8	27.3	1.7	3.3	21.9	1.8	3.8	18.0	2.0	4.2
105	153.4	1.2	0.9	102.3	1.2	1.2	77.3	1.3	1.6	58.6	1.4	1.9	45.4	1.5	2.3	35.7	1.6	2.8	28.6	1.7	3.3	23.0	1.8	3.8	18.9	2.0	4.2
110	160.7	1.2	0.9	107.2	1.2	1.2	81.0	1.3	1.6	61.4	1.4	1.9	47.6	1.5	2.3	37.3	1.6	2.8	30.0	1.7	3.3	24.1	1.8	3.8	19.8	2.0	4.2
115	168.0	1.2	0.9	112.1	1.2	1.2	84.7	1.3	1.6	64.2	1.4	1.9	49.8	1.5	2.3	39.0	1.6	2.8	31.3	1.7	3.3	25.3	1.8	3.8	20.8	2.0	4.2
120	175.3	1.2	0.9	117.0	1.2	1.2	88.3	1.3	1.6	67.0	1.4	1.9	51.9	1.5	2.3	40.7	1.6	2.8	32.7	1.7	3.3	26.7	1.8	3.7	21.7	2.0	4.2
125	182.6	1.2	0.9	121.8	1.2	1.2	92.0	1.3	1.6	69.7	1.4	1.9	54.1	1.5	2.3	42.4	1.6	2.8	34.1	1.7	3.3	27.8	1.8	3.7	22.6	1.9	4.3
130	189.9	1.2	0.9	126.7	1.2	1.2	95.7	1.3	1.6	72.5	1.4	1.9	56.2	1.5	2.3	44.1	1.6	2.8	35.4	1.7	3.3	28.9	1.8	3.7	23.6	1.9	4.3
135	197.3	1.2	0.9	131.6	1.2	1.2	99.4	1.3	1.6	75.3	1.4	1.9	58.4	1.5	2.3	45.8	1.6	2.8	36.8	1.7	3.3	30.0	1.8	3.7	24.5	1.9	4.3
140	204.6	1.2	0.9	136.5	1.2	1.2	103.1	1.3	1.6	78.1	1.4	1.9	60.6	1.5	2.3	47.5	1.6	2.8	38.1	1.7	3.3	31.1	1.8	3.7	25.4	1.9	4.3
145	211.9	1.2	0.9	141.3	1.2	1.2	106.7	1.3	1.6	80.9	1.4	1.9	62.7	1.5	2.3	49.2	1.6	2.8	39.5	1.7	3.3	32.3	1.8	3.7	26.4	1.9	4.3
150	219.2	1.2	0.9	146.2	1.2	1.2	110.4	1.3	1.6	83.7	1.4	1.9	64.9	1.5	2.3	50.9	1.6	2.8	40.8	1.7	3.3	33.4	1.8	3.7	27.3	1.9	4.3

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 3.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	8.8	1.0	0.8	5.8	1.1	1.1	3.9	1.5	1.3																		
10	18.0	1.0	0.8	12.1	1.1	1.2	8.9	1.1	1.5	6.6	1.3	1.8	4.7	1.5	2.1												
15	27.0	1.0	0.8	18.3	1.1	1.2	13.5	1.1	1.5	10.3	1.2	1.8	7.9	1.3	2.2	6.0	1.5	2.5									
20	35.9	1.0	0.8	24.4	1.1	1.2	18.2	1.1	1.5	13.8	1.2	1.8	10.7	1.3	2.2	8.3	1.4	2.6	6.4	1.6	3.0						
25	44.9	1.0	0.8	30.5	1.1	1.2	22.8	1.1	1.5	17.5	1.2	1.8	13.4	1.3	2.2	10.6	1.4	2.6	8.3	1.5	3.0	6.4	1.7	3.4			
30	53.9	1.0	0.8	36.6	1.1	1.2	27.3	1.1	1.5	20.9	1.2	1.8	16.2	1.3	2.2	12.8	1.4	2.6	10.2	1.5	3.0	8.1	1.6	3.5	6.0	1.9	3.9
35	62.8	1.0	0.8	42.7	1.1	1.2	31.8	1.1	1.5	24.4	1.2	1.8	19.1	1.2	2.2	15.0	1.3	2.6	12.0	1.4	3.0	9.6	1.6	3.5	7.6	1.7	3.9
40	71.8	1.0	0.8	48.8	1.1	1.2	36.4	1.1	1.5	27.9	1.2	1.8	21.9	1.2	2.2	17.2	1.3	2.6	13.8	1.4	3.1	11.1	1.5	3.5	9.0	1.7	4.0
45	80.8	1.0	0.8	54.9	1.0	1.2	40.9	1.1	1.5	31.3	1.2	1.8	24.6	1.2	2.2	19.6	1.3	2.6	15.5	1.4	3.1	12.6	1.5	3.5	10.2	1.7	4.0
50	89.7	1.0	0.8	60.9	1.0	1.2	45.4	1.1	1.5	34.8	1.2	1.8	27.3	1.2	2.2	21.8	1.3	2.6	17.3	1.4	3.1	14.1	1.5	3.5	11.5	1.6	4.0
55	98.7	1.0	0.8	67.0	1.0	1.2	50.0	1.1	1.5	38.3	1.2	1.8	30.0	1.2	2.2	24.0	1.3	2.6	19.1	1.4	3.1	15.5	1.5	3.5	12.7	1.6	4.0
60	107.7	1.0	0.8	73.1	1.0	1.2	54.5	1.1	1.5	41.8	1.2	1.8	32.7	1.2	2.2	26.1	1.3	2.6	21.0	1.4	3.1	16.9	1.5	3.6	14.0	1.6	4.0
65	116.6	1.0	0.8	79.2	1.0	1.2	59.0	1.1	1.5	45.2	1.2	1.8	35.5	1.2	2.2	28.3	1.3	2.6	22.8	1.4	3.1	18.4	1.5	3.6	15.1	1.6	4.0
70	125.6	1.0	0.8	85.3	1.0	1.2	63.6	1.1	1.5	48.7	1.2	1.8	38.2	1.2	2.2	30.5	1.3	2.6	24.5	1.4	3.1	19.8	1.5	3.6	16.3	1.6	4.1
75	134.6	1.0	0.8	91.4	1.0	1.2	68.1	1.1	1.5	52.2	1.2	1.9	40.9	1.2	2.2	32.6	1.3	2.6	26.2	1.4	3.1	21.5	1.5	3.5	17.5	1.6	4.1
80	143.6	1.0	0.8	97.5	1.0	1.2	72.7	1.1	1.5	55.7	1.2	1.9	43.6	1.2	2.2	34.8	1.3	2.6	28.0	1.4	3.1	23.0	1.5	3.5	18.8	1.6	4.1
85	152.5	1.0	0.8	103.6	1.0	1.2	77.2	1.1	1.5	59.1	1.2	1.9	46.3	1.2	2.2	37.0	1.3	2.6	29.7	1.4	3.1	24.4	1.5	3.6	20.0	1.6	4.1
90	161.5	1.0	0.8	109.7	1.0	1.2	81.7	1.1	1.5	62.6	1.2	1.9	49.1	1.2	2.2	39.1	1.3	2.6	31.5	1.4	3.1	25.8	1.5	3.6	21.2	1.6	4.1
95	170.5	1.0	0.8	115.8	1.0	1.2	86.3	1.1	1.5	66.1	1.2	1.9	51.8	1.2	2.2	41.3	1.3	2.6	33.2	1.4	3.1	27.2	1.5	3.6	22.6	1.6	4.0
100	179.5	1.0	0.8	121.9	1.0	1.2	90.8	1.1	1.5	69.6	1.2	1.9	54.5	1.2	2.2	43.5	1.3	2.6	35.0	1.4	3.1	28.7	1.5	3.6	23.8	1.6	4.0
105	188.4	1.0	0.8	128.0	1.0	1.2	95.4	1.1	1.5	73.0	1.2	1.9	57.2	1.2	2.2	45.6	1.3	2.6	36.7	1.4	3.1	30.1	1.5	3.6	25.0	1.6	4.0
110	197.4	1.0	0.8	134.1	1.0	1.2	99.9	1.1	1.5	76.5	1.2	1.9	60.0	1.2	2.2	47.8	1.3	2.6	38.4	1.4	3.1	31.5	1.5	3.6	26.2	1.6	4.0
115	206.4	1.0	0.8	140.1	1.0	1.2	104.4	1.1	1.5	80.0	1.2	1.9	62.7	1.2	2.2	50.0	1.3	2.6	40.2	1.4	3.1	32.9	1.5	3.6	27.4	1.6	4.0
120	215.3	1.0	0.8	146.2	1.0	1.2	109.0	1.1	1.5	83.5	1.2	1.9	65.4	1.2	2.2	52.2	1.3	2.6	41.9	1.4	3.1	34.4	1.5	3.6	28.6	1.6	4.0
125	224.3	1.0	0.8	152.3	1.0	1.2	113.5	1.1	1.5	86.9	1.2	1.9	68.1	1.2	2.2	54.3	1.3	2.6	43.7	1.4	3.1	35.8	1.5	3.6	29.8	1.6	4.0
130	233.3	1.0	0.8	158.4	1.0	1.2	118.1	1.1	1.5	90.4	1.2	1.9	70.9	1.2	2.2	56.5	1.3	2.6	45.4	1.4	3.1	37.2	1.5	3.6	30.9	1.6	4.0
135	242.3	1.0	0.8	164.5	1.0	1.2	122.6	1.1	1.5	93.9	1.2	1.9	73.6	1.2	2.2	58.7	1.3	2.6	47.2	1.4	3.1	38.6	1.5	3.6	32.1	1.6	4.1
140	251.2	1.0	0.8	170.6	1.0	1.2	127.1	1.1	1.5	97.4	1.2	1.9	76.3	1.2	2.2	60.8	1.3	2.6	48.9	1.4	3.1	40.1	1.5	3.6	33.3	1.6	4.1
145	260.2	1.0	0.8	176.7	1.0	1.2	131.7	1.1	1.5	100.9	1.2	1.9	79.0	1.2	2.2	63.0	1.3	2.6	50.7	1.4	3.1	41.5	1.5	3.6	34.5	1.6	4.1
150	269.2	1.0	0.8	182.8	1.0	1.2	136.2	1.1	1.5	104.3	1.2	1.9	81.7	1.2	2.2	65.2	1.3	2.6	52.4	1.4	3.1	42.9	1.5	3.6	35.7	1.6	4.1

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 4.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	10.1	0.9	0.8	7.0	1.0	1.1	4.9	1.1	1.4																		
10	20.5	0.9	0.8	14.4	0.9	1.1	10.3	1.0	1.4	7.9	1.1	1.8	6.1	1.2	2.1	4.5	1.4	2.4									
15	30.7	0.9	0.8	21.5	0.9	1.1	15.7	1.0	1.4	12.0	1.1	1.8	9.4	1.1	2.1	7.4	1.2	2.5	5.8	1.4	2.8						
20	40.9	0.9	0.8	28.6	0.9	1.1	20.9	1.0	1.4	16.3	1.0	1.8	12.6	1.1	2.1	10.1	1.2	2.5	8.0	1.3	2.9	6.3	1.4	3.3			
25	51.1	0.9	0.8	35.8	0.9	1.1	26.1	1.0	1.4	20.3	1.0	1.8	16.0	1.1	2.1	12.7	1.2	2.5	10.2	1.3	2.9	8.2	1.4	3.4	6.5	1.5	3.8
30	61.3	0.9	0.8	42.9	0.9	1.1	31.4	1.0	1.4	24.4	1.0	1.8	19.2	1.1	2.1	15.2	1.2	2.5	12.3	1.3	2.9	10.0	1.3	3.4	8.1	1.5	3.8
35	71.5	0.9	0.8	50.1	0.9	1.1	36.6	1.0	1.4	28.3	1.0	1.8	22.4	1.1	2.1	18.0	1.2	2.5	14.4	1.2	2.9	11.7	1.3	3.4	9.6	1.4	3.8
40	81.8	0.9	0.8	57.2	0.9	1.1	41.8	1.0	1.5	32.4	1.0	1.8	25.6	1.1	2.1	20.6	1.2	2.5	16.5	1.2	2.9	13.5	1.3	3.4	11.1	1.4	3.8
45	92.0	0.9	0.8	64.4	0.9	1.1	47.0	1.0	1.5	36.4	1.0	1.8	28.8	1.1	2.1	23.1	1.2	2.5	18.8	1.2	2.9	15.2	1.3	3.4	12.6	1.4	3.9
50	102.2	0.9	0.8	71.5	0.9	1.1	52.2	1.0	1.5	40.5	1.0	1.8	32.0	1.1	2.1	25.7	1.2	2.5	20.9	1.2	2.9	17.0	1.3	3.4	14.0	1.4	3.9
55	112.4	0.9	0.8	78.7	0.9	1.1	57.5	1.0	1.5	44.5	1.0	1.8	35.2	1.1	2.1	28.2	1.2	2.5	23.0	1.2	2.9	18.9	1.3	3.4	15.4	1.4	3.9
60	122.6	0.9	0.8	85.8	0.9	1.1	62.7	1.0	1.5	48.5	1.0	1.8	38.4	1.1	2.2	30.8	1.2	2.5	25.1	1.2	2.9	20.6	1.3	3.4	16.9	1.4	3.9
65	132.8	0.9	0.8	93.0	0.9	1.1	67.9	1.0	1.5	52.6	1.0	1.8	41.5	1.1	2.2	33.4	1.2	2.5	27.2	1.2	2.9	22.3	1.3	3.4	18.3	1.4	3.9
70	143.1	0.9	0.8	100.1	0.9	1.1	73.1	1.0	1.5	56.6	1.0	1.8	44.7	1.1	2.2	35.9	1.2	2.5	29.2	1.2	2.9	24.0	1.3	3.4	20.0	1.4	3.9
75	153.3	0.9	0.8	107.3	0.9	1.1	78.3	1.0	1.5	60.7	1.0	1.8	47.9	1.1	2.2	38.5	1.2	2.5	31.3	1.2	2.9	25.7	1.3	3.4	21.4	1.4	3.9
80	163.5	0.9	0.8	114.4	0.9	1.1	83.6	1.0	1.5	64.7	1.0	1.8	51.1	1.1	2.2	41.0	1.2	2.5	33.4	1.2	2.9	27.4	1.3	3.4	22.8	1.4	3.9
85	173.7	0.9	0.8	121.6	0.9	1.1	88.8	1.0	1.5	68.8	1.0	1.8	54.3	1.1	2.2	43.6	1.2	2.5	35.5	1.2	2.9	29.1	1.3	3.4	24.2	1.4	3.9
90	183.9	0.9	0.8	128.7	0.9	1.1	94.0	1.0	1.5	72.8	1.0	1.8	57.5	1.1	2.2	46.2	1.2	2.5	37.6	1.2	2.9	30.8	1.3	3.4	25.7	1.4	3.9
95	194.1	0.9	0.8	135.9	0.9	1.1	99.2	1.0	1.5	76.8	1.0	1.8	60.7	1.1	2.2	48.7	1.2	2.5	39.7	1.2	2.9	32.5	1.3	3.4	27.1	1.4	3.9
100	204.4	0.9	0.8	143.0	0.9	1.1	104.4	1.0	1.5	80.9	1.0	1.8	63.9	1.1	2.2	51.3	1.2	2.5	41.7	1.2	2.9	34.2	1.3	3.4	28.5	1.3	3.9
105	214.6	0.9	0.8	150.2	0.9	1.1	109.7	1.0	1.5	84.9	1.0	1.8	67.1	1.1	2.2	53.9	1.2	2.5	43.8	1.2	2.9	35.9	1.3	3.4	29.9	1.3	3.9
110	224.8	0.9	0.8	157.4	0.9	1.1	114.9	1.0	1.5	89.0	1.0	1.8	70.3	1.1	2.2	56.4	1.2	2.5	45.9	1.2	2.9	37.6	1.3	3.4	31.3	1.3	3.9
115	235.0	0.9	0.8	164.5	0.9	1.1	120.1	1.0	1.5	93.0	1.0	1.8	73.5	1.1	2.2	59.0	1.2	2.5	48.0	1.2	2.9	39.3	1.3	3.4	32.7	1.3	3.9
120	245.2	0.9	0.8	171.7	0.9	1.1	125.3	1.0	1.5	97.1	1.0	1.8	76.7	1.1	2.2	61.5	1.2	2.5	49.9	1.2	3.0	41.0	1.3	3.4	34.2	1.3	3.9
125	255.5	0.9	0.8	178.8	0.9	1.1	130.5	1.0	1.5	101.1	1.0	1.8	79.9	1.1	2.2	64.1	1.2	2.5	52.0	1.2	3.0	42.7	1.3	3.4	35.6	1.3	3.9
130	265.7	0.9	0.8	186.0	0.9	1.1	135.8	1.0	1.5	105.1	1.0	1.8	83.0	1.1	2.2	66.7	1.2	2.5	54.1	1.2	3.0	44.4	1.3	3.4	37.0	1.3	3.9
135	275.9	0.9	0.8	193.1	0.9	1.1	141.0	1.0	1.5	109.2	1.0	1.8	86.2	1.1	2.2	69.2	1.2	2.5	56.1	1.2	3.0	46.1	1.3	3.4	38.4	1.3	3.9
140	286.1	0.9	0.8	200.3	0.9	1.1	146.2	1.0	1.5	113.2	1.0	1.8	89.4	1.1	2.2	71.8	1.2	2.5	58.2	1.2	3.0	47.8	1.3	3.4	39.9	1.3	3.9
145	296.3	0.9	0.8	207.4	0.9	1.1	151.4	1.0	1.5	117.3	1.0	1.8	92.6	1.1	2.2	74.4	1.2	2.5	60.3	1.2	3.0	49.6	1.3	3.4	41.3	1.3	3.9
150	306.5	0.9	0.8	214.6	0.9	1.1	156.7	1.0	1.5	121.3	1.0	1.8	95.8	1.1	2.2	76.9	1.2	2.5	62.4	1.2	3.0	51.3	1.3	3.4	42.7	1.3	3.9

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 5.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	11.3	0.8	0.8	8.0	0.9	1.1	5.6	1.0	1.4	4.2	1.1	1.6															
10	22.5	0.8	0.8	16.3	0.9	1.1	11.5	0.9	1.4	8.9	1.0	1.7	7.0	1.0	2.0	5.5	1.2	2.4	4.0	1.4	2.6						
15	33.7	0.8	0.8	24.3	0.9	1.1	17.4	0.9	1.4	13.7	1.0	1.7	10.7	1.0	2.1	8.5	1.1	2.4	6.8	1.2	2.8	5.4	1.3	3.2			
20	45.0	0.8	0.8	32.4	0.9	1.1	23.2	0.9	1.4	18.2	1.0	1.7	14.5	1.0	2.1	11.5	1.1	2.5	9.3	1.1	2.8	7.5	1.2	3.2	6.1	1.4	3.7
25	56.2	0.8	0.8	40.5	0.9	1.1	28.9	0.9	1.4	22.8	1.0	1.7	18.1	1.0	2.1	14.6	1.1	2.4	11.7	1.1	2.8	9.6	1.2	3.3	7.8	1.3	3.7
30	67.4	0.8	0.8	48.7	0.9	1.1	34.7	0.9	1.4	27.3	1.0	1.7	21.7	1.0	2.1	17.5	1.1	2.4	14.1	1.1	2.8	11.6	1.2	3.3	9.5	1.3	3.7
35	78.7	0.8	0.8	56.8	0.9	1.1	40.5	0.9	1.4	31.8	1.0	1.7	25.3	1.0	2.1	20.4	1.0	2.5	16.7	1.1	2.8	13.6	1.2	3.3	11.2	1.3	3.7
40	89.9	0.8	0.8	64.9	0.9	1.1	46.3	0.9	1.4	36.4	1.0	1.7	28.8	1.0	2.1	23.3	1.0	2.5	19.1	1.1	2.8	15.6	1.2	3.3	12.9	1.2	3.7
45	101.1	0.8	0.8	73.0	0.9	1.1	52.1	0.9	1.4	40.9	1.0	1.7	32.4	1.0	2.1	26.2	1.0	2.5	21.5	1.1	2.8	17.7	1.2	3.3	14.6	1.2	3.7
50	112.4	0.8	0.8	81.1	0.9	1.1	57.9	0.9	1.4	45.5	1.0	1.7	36.0	1.0	2.1	29.1	1.0	2.5	23.9	1.1	2.8	19.7	1.2	3.3	16.2	1.2	3.7
55	123.6	0.8	0.8	89.2	0.9	1.1	63.6	0.9	1.4	50.0	1.0	1.7	39.6	1.0	2.1	32.0	1.0	2.5	26.2	1.1	2.8	21.7	1.2	3.3	18.0	1.2	3.8
60	134.8	0.8	0.8	97.3	0.9	1.1	69.4	0.9	1.4	54.5	1.0	1.7	43.2	1.0	2.1	34.9	1.0	2.5	28.6	1.1	2.8	23.6	1.2	3.3	19.7	1.2	3.8
65	146.1	0.8	0.8	105.4	0.9	1.1	75.2	0.9	1.4	59.1	1.0	1.7	46.8	1.0	2.1	37.8	1.0	2.5	31.0	1.1	2.8	25.6	1.2	3.3	21.3	1.2	3.8
70	157.3	0.8	0.8	113.5	0.9	1.1	81.0	0.9	1.4	63.6	1.0	1.7	50.4	1.0	2.1	40.7	1.0	2.5	33.4	1.1	2.8	27.5	1.2	3.3	22.9	1.2	3.8
75	168.6	0.8	0.8	121.6	0.9	1.1	86.8	0.9	1.4	68.2	1.0	1.7	54.0	1.0	2.1	43.6	1.0	2.5	35.8	1.1	2.8	29.4	1.2	3.3	24.5	1.2	3.8
80	179.8	0.8	0.8	129.7	0.9	1.1	92.6	0.9	1.4	72.7	0.9	1.7	57.6	1.0	2.1	46.5	1.0	2.5	38.1	1.1	2.8	31.4	1.2	3.3	26.2	1.2	3.8
85	191.0	0.8	0.8	137.8	0.9	1.1	98.3	0.9	1.4	77.3	0.9	1.7	61.2	1.0	2.1	49.4	1.0	2.5	40.5	1.1	2.8	33.3	1.2	3.3	27.8	1.2	3.8
90	202.3	0.8	0.8	145.9	0.9	1.1	104.1	0.9	1.4	81.8	0.9	1.7	64.9	1.0	2.1	52.3	1.0	2.5	42.9	1.1	2.8	35.3	1.2	3.3	29.4	1.2	3.8
95	213.5	0.8	0.8	154.0	0.9	1.1	109.9	0.9	1.4	86.3	0.9	1.7	68.5	1.0	2.1	55.2	1.0	2.5	45.3	1.1	2.8	37.2	1.2	3.3	31.1	1.2	3.8
100	224.7	0.8	0.8	162.1	0.9	1.1	115.7	0.9	1.4	90.9	0.9	1.7	72.1	1.0	2.1	58.1	1.0	2.5	47.7	1.1	2.8	39.2	1.2	3.3	32.7	1.2	3.8
105	236.0	0.8	0.8	170.2	0.9	1.1	121.5	0.9	1.4	95.4	0.9	1.7	75.7	1.0	2.1	61.0	1.0	2.5	50.0	1.1	2.8	41.1	1.2	3.3	34.3	1.2	3.8
110	247.2	0.8	0.8	178.3	0.9	1.1	127.3	0.9	1.4	100.0	0.9	1.7	79.3	1.0	2.1	64.0	1.0	2.5	52.4	1.1	2.8	43.1	1.2	3.3	35.0	1.2	3.8
115	258.5	0.8	0.8	186.4	0.9	1.1	133.0	0.9	1.4	104.5	0.9	1.7	82.9	1.0	2.1	66.9	1.0	2.5	54.8	1.1	2.8	45.0	1.2	3.3	37.6	1.2	3.8
120	269.7	0.8	0.8	194.6	0.9	1.1	138.8	0.9	1.4	109.1	0.9	1.7	86.5	1.0	2.1	69.8	1.0	2.5	57.2	1.1	2.8	47.0	1.2	3.3	39.2	1.2	3.8
125	280.9	0.8	0.8	202.7	0.9	1.1	144.6	0.9	1.4	113.6	0.9	1.7	90.1	1.0	2.1	72.7	1.0	2.5	59.6	1.1	2.8	48.9	1.2	3.3	40.9	1.2	3.8
130	292.2	0.8	0.8	210.8	0.9	1.1	150.4	0.9	1.4	118.2	0.9	1.7	93.7	1.0	2.1	75.6	1.0	2.5	61.9	1.1	2.8	50.9	1.2	3.3	42.5	1.2	3.8
135	303.4	0.8	0.8	218.9	0.9	1.1	156.2	0.9	1.4	122.7	0.9	1.7	97.3	1.0	2.1	78.5	1.0	2.5	64.3	1.1	2.8	52.9	1.2	3.3	44.1	1.2	3.8
140	314.6	0.8	0.8	227.0	0.9	1.1	162.0	0.9	1.4	127.2	0.9	1.7	100.9	1.0	2.1	81.4	1.0	2.5	66.7	1.1	2.8	54.8	1.2	3.3	45.8	1.2	3.8
145	325.9	0.8	0.8	235.1	0.9	1.1	167.8	0.9	1.4	131.8	0.9	1.7	104.5	1.0	2.1	84.3	1.0	2.5	69.1	1.1	2.8	56.8	1.2	3.3	47.4	1.2	3.8
150	337.1	0.8	0.8	243.2	0.9	1.1	173.5	0.9	1.4	136.3	0.9	1.7	108.1	1.0	2.1	87.2	1.0	2.5	71.5	1.1	2.8	58.7	1.2	3.3	49.0	1.2	3.8

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 6.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	12.4	0.7	0.8	8.7	0.8	1.0	6.2	0.9	1.4	4.7	1.0	1.6	3.5	1.2	1.9												
10	24.7	0.7	0.8	17.6	0.8	1.0	12.8	0.9	1.4	9.8	0.9	1.7	7.8	1.0	2.0	6.2	1.0	2.3	4.9	1.1	2.7						
15	37.1	0.7	0.8	26.4	0.8	1.1	19.2	0.8	1.4	15.0	0.9	1.7	11.8	0.9	2.0	9.5	1.0	2.4	7.7	1.1	2.7	6.2	1.2	3.1	5.0	1.3	3.5
20	49.4	0.7	0.8	35.1	0.8	1.1	25.6	0.8	1.4	19.9	0.9	1.7	16.0	0.9	2.0	12.9	1.0	2.4	10.4	1.0	2.8	8.5	1.1	3.2	7.0	1.2	3.6
25	61.8	0.7	0.8	43.9	0.8	1.1	32.0	0.8	1.4	24.9	0.9	1.7	19.9	0.9	2.0	16.1	1.0	2.4	13.1	1.0	2.8	10.8	1.1	3.2	8.9	1.2	3.6
30	74.1	0.7	0.8	52.7	0.8	1.1	38.4	0.8	1.4	29.9	0.9	1.7	23.8	0.9	2.1	19.3	1.0	2.4	15.9	1.0	2.8	13.0	1.1	3.2	10.8	1.1	3.6
35	86.5	0.7	0.8	61.5	0.8	1.1	44.8	0.8	1.4	34.8	0.9	1.7	27.8	0.9	2.1	22.5	1.0	2.4	18.5	1.0	2.8	15.4	1.1	3.2	12.7	1.1	3.6
40	98.9	0.7	0.8	70.2	0.8	1.1	51.2	0.8	1.4	39.8	0.9	1.7	31.8	0.9	2.1	25.7	1.0	2.4	21.2	1.0	2.8	17.6	1.1	3.2	14.5	1.1	3.6
45	111.2	0.7	0.8	79.0	0.8	1.1	57.6	0.8	1.4	44.8	0.9	1.7	35.7	0.9	2.1	29.0	1.0	2.4	23.8	1.0	2.8	19.8	1.1	3.2	16.6	1.1	3.6
50	123.6	0.7	0.8	87.8	0.8	1.1	64.0	0.8	1.4	49.7	0.9	1.7	39.7	0.9	2.1	32.2	1.0	2.4	26.4	1.0	2.8	22.0	1.1	3.2	18.4	1.1	3.6
55	135.9	0.7	0.8	96.6	0.8	1.1	70.4	0.8	1.4	54.7	0.9	1.7	43.6	0.9	2.1	35.4	1.0	2.4	29.1	1.0	2.8	24.2	1.1	3.2	20.2	1.1	3.7
60	148.3	0.7	0.8	105.3	0.8	1.1	76.8	0.8	1.4	59.7	0.9	1.7	47.6	0.9	2.1	38.6	1.0	2.4	31.7	1.0	2.8	26.3	1.1	3.2	22.0	1.1	3.7
65	160.6	0.7	0.8	114.1	0.8	1.1	83.2	0.8	1.4	64.7	0.9	1.7	51.6	0.9	2.1	41.8	1.0	2.4	34.3	1.0	2.8	28.5	1.1	3.2	23.8	1.1	3.7
70	173.0	0.7	0.8	122.9	0.8	1.1	89.6	0.8	1.4	69.6	0.9	1.7	55.5	0.9	2.1	45.0	1.0	2.4	37.0	1.0	2.8	30.7	1.1	3.2	25.6	1.1	3.7
75	185.4	0.7	0.8	131.7	0.8	1.1	96.0	0.8	1.4	74.6	0.9	1.7	59.5	0.9	2.1	48.2	1.0	2.4	39.6	1.0	2.8	32.9	1.1	3.2	27.4	1.1	3.7
80	197.7	0.7	0.8	140.4	0.8	1.1	102.3	0.8	1.4	79.6	0.9	1.7	63.5	0.9	2.1	51.4	1.0	2.4	42.2	1.0	2.8	35.1	1.1	3.2	29.3	1.1	3.7
85	210.1	0.7	0.8	149.2	0.8	1.1	108.7	0.8	1.4	84.5	0.9	1.7	67.4	0.9	2.1	54.7	1.0	2.4	44.9	1.0	2.8	37.3	1.1	3.2	31.1	1.1	3.7
90	222.4	0.7	0.8	158.0	0.8	1.1	115.1	0.8	1.4	89.5	0.9	1.7	71.4	0.9	2.1	57.9	1.0	2.4	47.5	1.0	2.8	39.5	1.1	3.2	32.9	1.1	3.7
95	234.8	0.7	0.8	166.8	0.8	1.1	121.5	0.8	1.4	94.5	0.9	1.7	75.4	0.9	2.1	61.1	1.0	2.4	50.2	1.0	2.8	41.7	1.1	3.2	34.7	1.1	3.7
100	247.1	0.7	0.8	175.5	0.8	1.1	127.9	0.8	1.4	99.5	0.9	1.7	79.3	0.9	2.1	64.3	1.0	2.4	52.8	1.0	2.8	43.9	1.1	3.2	36.6	1.1	3.7
105	259.5	0.7	0.8	184.3	0.8	1.1	134.3	0.8	1.4	104.4	0.9	1.7	83.3	0.9	2.1	67.5	1.0	2.4	55.4	1.0	2.8	46.1	1.1	3.2	38.4	1.1	3.7
110	271.8	0.7	0.8	193.1	0.8	1.1	140.7	0.8	1.4	109.4	0.9	1.7	87.3	0.9	2.1	70.7	1.0	2.4	58.1	1.0	2.8	48.2	1.1	3.2	40.2	1.1	3.7
115	284.2	0.7	0.8	201.9	0.8	1.1	147.1	0.8	1.4	114.4	0.9	1.7	91.2	0.9	2.1	73.9	1.0	2.4	60.7	1.0	2.8	50.4	1.1	3.2	42.0	1.1	3.7
120	296.6	0.7	0.8	210.7	0.8	1.1	153.5	0.8	1.4	119.3	0.9	1.7	95.2	0.9	2.1	77.2	1.0	2.4	63.3	1.0	2.8	52.6	1.1	3.2	43.9	1.1	3.7
125	308.9	0.7	0.8	219.4	0.8	1.1	159.9	0.8	1.4	124.3	0.9	1.7	99.2	0.9	2.1	80.4	1.0	2.4	66.0	1.0	2.8	54.8	1.1	3.2	45.7	1.1	3.7
130	321.3	0.7	0.8	228.2	0.8	1.1	166.3	0.8	1.4	129.3	0.9	1.7	103.1	0.9	2.1	83.6	1.0	2.4	68.6	1.0	2.8	57.0	1.1	3.2	47.5	1.1	3.7
135	333.6	0.7	0.8	237.0	0.8	1.1	172.7	0.8	1.4	134.3	0.9	1.7	107.1	0.9	2.1	86.8	1.0	2.4	71.3	1.0	2.8	59.2	1.1	3.2	49.3	1.1	3.7
140	346.0	0.7	0.8	245.8	0.8	1.1	179.1	0.8	1.4	139.2	0.9	1.7	111.0	0.9	2.1	90.0	1.0	2.4	73.9	1.0	2.8	61.4	1.1	3.2	51.2	1.1	3.7
145	358.3	0.7	0.8	254.5	0.8	1.1	185.5	0.8	1.4	144.2	0.9	1.7	115.0	0.9	2.1	93.2	1.0	2.4	76.5	1.0	2.8	63.6	1.1	3.2	53.0	1.1	3.7
150	370.7	0.7	0.8	263.3	0.8	1.1	191.9	0.8	1.4	149.2	0.9	1.7	119.0	0.9	2.1	96.4	1.0	2.4	79.2	1.0	2.8	65.8	1.1	3.2	54.8	1.1	3.7

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 8.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	14.0	0.7	0.8	10.1	0.7	1.0	7.4	0.8	1.3	5.5	0.8	1.6	4.4	0.9	1.9	3.4	1.0	2.1									
10	28.0	0.7	0.8	20.1	0.7	1.0	15.0	0.8	1.3	11.3	0.8	1.7	9.1	0.8	2.0	7.4	0.9	2.3	6.0	0.9	2.6	4.9	1.0	3.0	3.8	1.2	3.3
15	41.9	0.7	0.8	30.1	0.7	1.0	22.4	0.8	1.3	17.0	0.8	1.7	13.9	0.8	2.0	11.4	0.9	2.3	9.2	0.9	2.7	7.6	1.0	3.0	6.3	1.0	3.4
20	55.9	0.7	0.8	40.1	0.7	1.0	29.9	0.8	1.3	22.6	0.8	1.7	18.5	0.8	2.0	15.1	0.9	2.3	12.5	0.9	2.7	10.2	1.0	3.1	8.5	1.0	3.5
25	69.9	0.7	0.8	50.1	0.7	1.0	37.3	0.8	1.3	28.2	0.8	1.7	23.1	0.8	2.0	18.8	0.9	2.3	15.6	0.9	2.7	13.0	0.9	3.1	10.8	1.0	3.5
30	83.9	0.7	0.8	60.1	0.7	1.0	44.8	0.8	1.3	33.9	0.8	1.7	27.7	0.8	2.0	22.6	0.9	2.3	18.6	0.9	2.7	15.6	0.9	3.1	13.0	1.0	3.5
35	97.9	0.7	0.8	70.1	0.7	1.0	52.3	0.8	1.3	39.5	0.8	1.7	32.3	0.8	2.0	26.3	0.9	2.3	21.7	0.9	2.7	18.2	0.9	3.1	15.3	1.0	3.5
40	111.8	0.7	0.8	80.2	0.7	1.0	59.7	0.8	1.3	45.1	0.8	1.7	36.9	0.8	2.0	30.1	0.9	2.3	24.8	0.9	2.7	20.8	0.9	3.1	17.5	1.0	3.5
45	125.8	0.7	0.8	90.2	0.7	1.0	67.2	0.8	1.3	50.8	0.8	1.7	41.5	0.8	2.0	33.8	0.9	2.3	27.9	0.9	2.7	23.3	0.9	3.1	19.7	1.0	3.5
50	139.8	0.7	0.8	100.2	0.7	1.0	74.7	0.8	1.3	56.4	0.8	1.7	46.1	0.8	2.0	37.6	0.9	2.3	31.0	0.9	2.7	25.9	0.9	3.1	21.9	1.0	3.5
55	153.8	0.7	0.8	110.2	0.7	1.0	82.1	0.8	1.3	62.1	0.8	1.7	50.7	0.8	2.0	41.3	0.9	2.3	34.1	0.9	2.7	28.5	0.9	3.1	24.0	1.0	3.5
60	167.8	0.7	0.8	120.2	0.7	1.0	89.6	0.8	1.3	67.7	0.8	1.7	55.3	0.8	2.0	45.1	0.9	2.3	37.2	0.9	2.7	31.1	0.9	3.1	26.2	1.0	3.5
65	181.7	0.7	0.8	130.3	0.7	1.0	97.0	0.8	1.3	73.3	0.8	1.7	60.0	0.8	2.0	48.8	0.9	2.3	40.3	0.9	2.7	33.7	0.9	3.1	28.4	1.0	3.5
70	195.7	0.7	0.8	140.3	0.7	1.0	104.5	0.8	1.3	79.0	0.8	1.7	64.6	0.8	2.0	52.6	0.9	2.3	43.4	0.9	2.7	36.3	0.9	3.1	30.6	1.0	3.5
75	209.7	0.7	0.8	150.3	0.7	1.0	112.0	0.8	1.3	84.6	0.8	1.7	69.2	0.8	2.0	56.3	0.9	2.3	46.5	0.9	2.7	38.9	0.9	3.1	32.8	1.0	3.5
80	223.7	0.7	0.8	160.3	0.7	1.0	119.4	0.8	1.3	90.3	0.8	1.7	73.8	0.8	2.0	60.1	0.9	2.3	49.6	0.9	2.7	41.4	0.9	3.1	35.0	1.0	3.5
85	237.7	0.7	0.8	170.3	0.7	1.0	126.9	0.8	1.3	95.9	0.8	1.7	78.4	0.8	2.0	63.8	0.9	2.3	52.7	0.9	2.7	44.0	0.9	3.1	37.1	1.0	3.5
90	251.6	0.7	0.8	180.3	0.7	1.0	134.4	0.8	1.3	101.6	0.8	1.7	83.0	0.8	2.0	67.6	0.9	2.3	55.8	0.9	2.7	46.6	0.9	3.1	39.3	1.0	3.5
95	265.6	0.7	0.8	190.4	0.7	1.0	141.8	0.8	1.3	107.2	0.8	1.7	87.6	0.8	2.0	71.3	0.9	2.3	58.9	0.9	2.7	49.2	0.9	3.1	41.5	1.0	3.5
100	279.6	0.7	0.8	200.4	0.7	1.0	149.3	0.8	1.3	112.8	0.8	1.7	92.2	0.8	2.0	75.1	0.9	2.3	62.0	0.9	2.7	51.8	0.9	3.1	43.7	1.0	3.5
105	293.6	0.7	0.8	210.4	0.7	1.0	156.8	0.8	1.3	118.5	0.8	1.7	96.8	0.8	2.0	78.9	0.9	2.3	65.1	0.9	2.7	54.4	0.9	3.1	45.9	1.0	3.5
110	307.6	0.7	0.8	220.4	0.7	1.0	164.2	0.8	1.3	124.1	0.8	1.7	101.4	0.8	2.0	82.6	0.9	2.3	68.2	0.9	2.7	57.0	0.9	3.1	48.0	1.0	3.5
115	321.5	0.7	0.8	230.4	0.7	1.0	171.7	0.8	1.3	129.8	0.8	1.7	106.1	0.8	2.0	86.4	0.9	2.3	71.3	0.9	2.7	59.6	0.9	3.1	50.2	1.0	3.5
120	335.5	0.7	0.8	240.5	0.7	1.0	179.1	0.8	1.3	135.4	0.8	1.7	110.7	0.8	2.0	90.1	0.9	2.3	74.4	0.9	2.7	62.2	0.9	3.1	52.4	1.0	3.5
125	349.5	0.7	0.8	250.5	0.7	1.0	186.6	0.8	1.3	141.0	0.8	1.7	115.3	0.8	2.0	93.9	0.9	2.3	77.5	0.9	2.7	64.7	0.9	3.1	54.6	1.0	3.5
130	363.5	0.7	0.8	260.5	0.7	1.0	194.1	0.8	1.3	146.7	0.8	1.7	119.9	0.8	2.0	97.6	0.9	2.3	80.6	0.9	2.7	67.3	0.9	3.1	56.8	1.0	3.5
135	377.5	0.7	0.8	270.5	0.7	1.0	201.5	0.8	1.3	152.3	0.8	1.7	124.5	0.8	2.0	101.4	0.9	2.3	83.7	0.9	2.7	69.9	0.9	3.1	59.0	1.0	3.5
140	391.5	0.7	0.8	280.5	0.7	1.0	209.0	0.8	1.3	158.0	0.8	1.7	129.1	0.8	2.0	105.1	0.9	2.3	86.8	0.9	2.7	72.5	0.9	3.1	61.1	1.0	3.5
145	405.4	0.7	0.8	290.6	0.7	1.0	216.5	0.8	1.3	163.6	0.8	1.7	133.7	0.8	2.0	108.9	0.9	2.3	89.9	0.9	2.7	75.1	0.9	3.1	63.3	1.0	3.5
150	419.4	0.7	0.8	300.6	0.7	1.0	223.9	0.8	1.3	169.3	0.8	1.7	138.3	0.8	2.0	112.6	0.9	2.3	93.0	0.9	2.7	77.7	0.9	3.1	65.5	1.0	3.5

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "B"

GRADE 10.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	15.3	0.6	0.8	11.1	0.7	1.0	8.1	0.7	1.3	6.3	0.7	1.6	4.8	0.8	1.9	4.0	0.9	2.2	3.1	1.0	2.4						
10	30.6	0.6	0.8	22.1	0.7	1.0	16.5	0.7	1.3	12.8	0.7	1.6	10.0	0.8	2.0	8.4	0.8	2.2	6.9	0.8	2.6	5.7	0.9	2.9	4.7	1.0	3.3
15	45.9	0.6	0.8	33.2	0.7	1.0	24.7	0.7	1.3	19.2	0.7	1.6	15.0	0.8	2.0	12.7	0.8	2.2	10.5	0.8	2.6	8.7	0.9	3.0	7.3	0.9	3.3
20	61.2	0.6	0.8	44.2	0.7	1.0	32.9	0.7	1.3	25.6	0.7	1.6	20.0	0.8	2.0	17.0	0.8	2.2	14.1	0.8	2.6	11.8	0.9	3.0	9.8	0.9	3.4
25	76.5	0.6	0.8	55.3	0.7	1.0	41.1	0.7	1.3	32.0	0.7	1.6	25.0	0.8	2.0	21.2	0.8	2.3	17.6	0.8	2.6	14.7	0.9	3.0	12.5	0.9	3.4
30	91.8	0.6	0.8	66.3	0.7	1.0	49.3	0.7	1.3	38.3	0.7	1.6	29.9	0.8	2.0	25.4	0.8	2.3	21.1	0.8	2.6	17.7	0.8	3.0	15.0	0.9	3.3
35	107.1	0.6	0.8	77.4	0.7	1.0	57.5	0.7	1.3	44.7	0.7	1.6	34.9	0.8	2.0	29.7	0.8	2.3	24.6	0.8	2.6	20.6	0.8	3.0	17.5	0.9	3.4
40	122.4	0.6	0.8	88.4	0.7	1.0	65.7	0.7	1.3	51.1	0.7	1.6	39.9	0.8	2.0	33.9	0.8	2.3	28.1	0.8	2.6	23.5	0.8	3.0	20.0	0.9	3.4
45	137.8	0.6	0.8	99.5	0.7	1.0	73.9	0.7	1.3	57.5	0.7	1.6	44.9	0.8	2.0	38.0	0.8	2.3	31.6	0.8	2.6	26.5	0.8	3.0	22.5	0.9	3.4
50	153.1	0.6	0.8	110.6	0.7	1.0	82.1	0.7	1.3	63.9	0.7	1.6	49.9	0.8	2.0	42.2	0.8	2.3	35.1	0.8	2.6	29.4	0.8	3.0	25.0	0.9	3.4
55	168.4	0.6	0.8	121.6	0.7	1.0	90.3	0.7	1.3	70.3	0.7	1.6	54.9	0.8	2.0	46.4	0.8	2.3	38.6	0.8	2.6	32.3	0.8	3.0	27.5	0.9	3.4
60	183.7	0.6	0.8	132.7	0.7	1.0	98.5	0.7	1.3	76.7	0.7	1.6	59.9	0.8	2.0	50.7	0.8	2.3	42.1	0.8	2.6	35.3	0.8	3.0	30.0	0.9	3.4
65	199.0	0.6	0.8	143.7	0.7	1.0	106.7	0.7	1.3	83.1	0.7	1.6	64.8	0.8	2.0	54.9	0.8	2.3	45.6	0.8	2.6	38.2	0.8	3.0	32.5	0.9	3.4
70	214.3	0.6	0.8	154.8	0.7	1.0	115.0	0.7	1.3	89.4	0.7	1.6	69.8	0.8	2.0	59.1	0.8	2.3	49.1	0.8	2.6	41.2	0.8	3.0	35.0	0.9	3.4
75	229.6	0.6	0.8	165.8	0.7	1.0	123.2	0.7	1.3	95.8	0.7	1.6	74.8	0.8	2.0	63.3	0.8	2.3	52.6	0.8	2.6	44.1	0.8	3.0	37.4	0.9	3.4
80	244.9	0.6	0.8	176.9	0.7	1.0	131.4	0.7	1.3	102.2	0.7	1.6	79.8	0.8	2.0	67.6	0.8	2.3	56.1	0.8	2.6	47.0	0.8	3.0	39.8	0.9	3.4
85	260.2	0.6	0.8	187.9	0.7	1.0	139.6	0.7	1.3	108.6	0.7	1.6	84.8	0.8	2.0	71.8	0.8	2.3	59.6	0.8	2.6	50.0	0.8	3.0	42.3	0.9	3.4
90	275.5	0.6	0.8	199.0	0.7	1.0	147.8	0.7	1.3	115.0	0.7	1.6	89.8	0.8	2.0	76.0	0.8	2.3	63.1	0.8	2.6	52.9	0.8	3.0	44.8	0.9	3.4
95	290.8	0.6	0.8	210.0	0.7	1.0	156.0	0.7	1.3	121.4	0.7	1.6	94.8	0.8	2.0	80.2	0.8	2.3	66.6	0.8	2.6	55.8	0.8	3.0	47.3	0.9	3.4
100	306.1	0.6	0.8	221.1	0.7	1.0	164.2	0.7	1.3	127.8	0.7	1.6	99.8	0.8	2.0	84.4	0.8	2.3	70.1	0.8	2.6	58.8	0.8	3.0	49.7	0.9	3.4
105	321.4	0.6	0.8	232.2	0.7	1.0	172.4	0.7	1.3	134.2	0.7	1.6	104.7	0.8	2.0	88.7	0.8	2.3	73.6	0.8	2.6	61.7	0.8	3.0	52.2	0.9	3.4
110	336.7	0.6	0.8	243.2	0.7	1.0	180.6	0.7	1.3	140.5	0.7	1.6	109.7	0.8	2.0	92.9	0.8	2.3	77.1	0.8	2.6	64.7	0.8	3.0	54.7	0.9	3.4
115	352.0	0.6	0.8	254.3	0.7	1.0	188.8	0.7	1.3	146.9	0.7	1.6	114.7	0.8	2.0	97.1	0.8	2.3	80.6	0.8	2.6	67.6	0.8	3.0	57.2	0.9	3.4
120	367.3	0.6	0.8	265.3	0.7	1.0	197.1	0.7	1.3	153.3	0.7	1.6	119.7	0.8	2.0	101.3	0.8	2.3	84.1	0.8	2.6	70.5	0.8	3.0	59.7	0.9	3.4
125	382.6	0.6	0.8	276.4	0.7	1.0	205.3	0.7	1.3	159.7	0.7	1.6	124.7	0.8	2.0	105.5	0.8	2.3	87.6	0.8	2.6	73.5	0.8	3.0	62.2	0.9	3.4
130	397.9	0.6	0.8	287.4	0.7	1.0	213.5	0.7	1.3	166.1	0.7	1.6	129.7	0.8	2.0	109.8	0.8	2.3	91.1	0.8	2.6	76.4	0.8	3.0	64.7	0.9	3.4
135	413.2	0.6	0.8	298.5	0.7	1.0	221.7	0.7	1.3	172.5	0.7	1.6	134.7	0.8	2.0	114.0	0.8	2.3	94.6	0.8	2.6	79.3	0.8	3.0	67.2	0.9	3.4
140	428.6	0.6	0.8	309.5	0.7	1.0	229.9	0.7	1.3	178.9	0.7	1.6	139.7	0.8	2.0	118.2	0.8	2.3	98.1	0.8	2.6	82.3	0.8	3.0	69.6	0.9	3.4
145	443.9	0.6	0.8	320.6	0.7	1.0	238.1	0.7	1.3	185.3	0.7	1.6	144.6	0.8	2.0	122.4	0.8	2.3	101.7	0.8	2.6	85.2	0.8	3.0	72.1	0.9	3.4
150	459.2	0.6	0.8	331.7	0.7	1.0	246.3	0.7	1.3	191.6	0.7	1.6	149.6	0.8	2.0	126.7	0.8	2.3	105.2	0.8	2.6	88.2	0.8	3.0	74.6	0.9	3.4

EXHIBIT 9-1 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "B")

V1 FOR RETARDANCE "D". TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 0.25 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5																											
10																											
15																											
20																											
25	9.3	2.3	1.7																								
30	11.7	2.2	1.8																								
35	14.1	2.1	1.7																								
40	16.3	2.1	1.8																								
45	18.5	2.1	1.8	10.4	2.8	2.3																					
50	20.7	2.1	1.8	12.3	2.6	2.3																					
55	22.9	2.1	1.8	13.8	2.6	2.3																					
60	25.0	2.0	1.8	15.3	2.5	2.3																					
65	27.2	2.0	1.8	16.8	2.5	2.3	10.4	3.4	2.8																		
70	29.3	2.0	1.8	18.2	2.5	2.3	12.1	3.1	2.8																		
75	31.9	2.0	1.7	19.7	2.4	2.3	13.5	3.0	2.8																		
80	34.0	2.0	1.7	21.1	2.4	2.3	14.7	2.9	2.8																		
85	36.1	2.0	1.7	22.5	2.4	2.3	15.8	2.9	2.8																		
90	38.2	2.0	1.7	23.9	2.4	2.3	16.9	2.8	2.8																		
95	40.3	2.0	1.7	25.3	2.4	2.3	18.0	2.8	2.8																		
100	42.4	2.0	1.7	26.7	2.4	2.3	19.1	2.8	2.8																		
105	44.6	2.0	1.7	28.1	2.4	2.3	20.2	2.8	2.8																		
110	46.7	2.0	1.7	29.5	2.4	2.3	21.3	2.8	2.8	12.9	3.8	3.4															
115	48.8	2.0	1.7	30.8	2.4	2.3	22.3	2.8	2.8	14.0	3.7	3.4															
120	50.9	2.0	1.7	32.2	2.4	2.3	23.4	2.8	2.8	15.3	3.5	3.4															
125	53.0	2.0	1.8	33.6	2.4	2.3	24.4	2.8	2.8	16.1	3.5	3.4															
130	55.1	2.0	1.8	35.0	2.4	2.3	25.5	2.8	2.8	16.9	3.4	3.4															
135	57.3	2.0	1.8	36.4	2.4	2.3	26.5	2.7	2.8	17.7	3.4	3.4															
140	59.4	2.0	1.8	38.3	2.4	2.3	27.6	2.7	2.8	18.5	3.4	3.4															
145	61.5	2.0	1.8	39.7	2.4	2.3	28.6	2.7	2.8	19.3	3.3	3.4															
150	63.6	2.0	1.8	41.1	2.4	2.3	29.6	2.7	2.8	20.1	3.3	3.4															

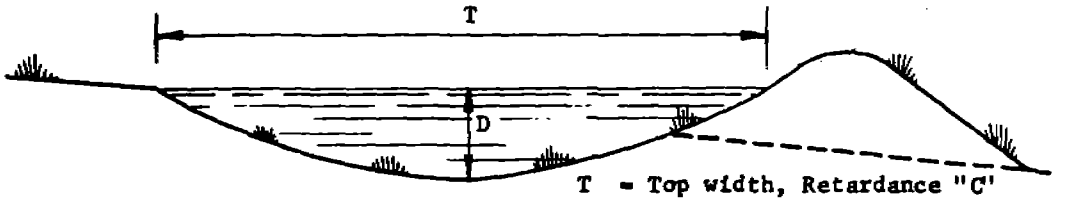

T = Top width, Retardance "C"
D = Depth, Retardance "C"
V_2 = Velocity, Retardance "C"
V_1 = Velocity, Retardance "D"

Note - Depth "D" does not include allowance for freeboard and settlement.

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 0.50 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5																											
10																											
15	8.4	1.6	1.7																								
20	11.7	1.5	1.7	7.1	2.0	2.2																					
25	14.9	1.5	1.7	9.7	1.8	2.2																					
30	18.0	1.5	1.7	12.0	1.7	2.2																					
35	21.0	1.5	1.7	14.2	1.7	2.2	9.3	2.1	2.7																		
40	24.4	1.5	1.7	16.3	1.7	2.2	10.9	2.0	2.7																		
45	27.4	1.5	1.7	18.5	1.7	2.2	12.5	2.0	2.7																		
50	30.5	1.5	1.7	20.6	1.7	2.2	14.1	1.9	2.7	8.7	2.6	3.3															
55	33.5	1.5	1.7	22.7	1.7	2.2	15.7	1.9	2.7	10.4	2.4	3.3															
60	36.6	1.5	1.7	24.8	1.7	2.2	17.2	1.9	2.7	11.7	2.3	3.3															
65	39.6	1.5	1.7	27.3	1.7	2.2	18.8	1.9	2.7	12.9	2.3	3.3															
70	42.6	1.5	1.7	29.4	1.7	2.2	20.3	1.9	2.7	14.0	2.2	3.3	9.8	2.8	3.8												
75	45.7	1.5	1.7	31.4	1.7	2.2	21.8	1.9	2.7	15.2	2.2	3.3	11.3	2.7	3.8												
80	48.7	1.5	1.7	33.5	1.7	2.2	23.3	1.9	2.7	16.3	2.2	3.3	12.2	2.6	3.8												
85	51.7	1.5	1.7	35.6	1.6	2.2	24.8	1.9	2.7	17.4	2.2	3.3	13.2	2.5	3.8												
90	54.8	1.5	1.7	37.7	1.6	2.2	26.3	1.9	2.7	18.5	2.2	3.3	14.2	2.5	3.8												
95	57.8	1.5	1.7	39.8	1.6	2.2	27.8	1.9	2.7	19.6	2.2	3.3	15.1	2.5	3.8												
100	60.9	1.5	1.7	41.9	1.6	2.2	29.7	1.9	2.7	20.7	2.2	3.3	16.0	2.5	3.8	11.0	3.2	4.3									
105	63.9	1.5	1.7	44.0	1.6	2.2	31.2	1.9	2.7	21.8	2.2	3.3	16.9	2.5	3.8	12.3	3.0	4.3									
110	66.9	1.5	1.7	46.1	1.6	2.2	32.6	1.9	2.7	22.9	2.2	3.3	17.8	2.4	3.8	13.1	2.9	4.3									
115	70.0	1.5	1.7	48.1	1.6	2.2	34.1	1.9	2.7	24.0	2.1	3.3	18.7	2.4	3.8	13.9	2.9	4.3									
120	73.0	1.5	1.7	50.2	1.6	2.2	35.6	1.9	2.7	25.1	2.1	3.3	19.6	2.4	3.8	14.6	2.9	4.3									
125	76.1	1.5	1.7	52.3	1.6	2.2	37.1	1.9	2.7	26.2	2.1	3.3	20.5	2.4	3.8	15.4	2.8	4.3									
130	79.1	1.5	1.7	54.4	1.6	2.2	38.5	1.9	2.7	27.3	2.1	3.3	21.3	2.4	3.8	16.1	2.8	4.3									
135	82.1	1.5	1.7	56.5	1.6	2.2	40.0	1.9	2.7	28.4	2.1	3.3	22.2	2.4	3.8	16.9	2.8	4.3									
140	85.2	1.5	1.7	58.6	1.6	2.2	41.5	1.9	2.7	29.4	2.1	3.3	23.1	2.4	3.8	17.6	2.8	4.3									
145	88.2	1.5	1.7	60.7	1.6	2.2	43.0	1.9	2.7	30.5	2.1	3.3	24.0	2.4	3.8	18.3	2.8	4.3	12.3	3.7	4.9						
150	91.3	1.5	1.7	62.8	1.6	2.2	44.5	1.9	2.7	31.6	2.1	3.3	24.8	2.4	3.8	19.0	2.7	4.3	13.1	3.5	4.9						

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 0.75 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5																											
10	7.0	1.3	1.6																								
15	11.0	1.3	1.6	7.1	1.5	2.1																					
20	14.9	1.3	1.6	9.9	1.4	2.1	6.1	1.9	2.6																		
25	18.9	1.2	1.6	12.7	1.4	2.1	8.6	1.6	2.7																		
30	22.7	1.2	1.6	15.3	1.4	2.1	10.6	1.6	2.6	6.7	2.1	3.2															
35	26.5	1.2	1.6	18.0	1.4	2.1	12.6	1.6	2.7	8.7	1.9	3.2															
40	30.2	1.2	1.6	20.6	1.4	2.1	14.5	1.6	2.7	10.3	1.8	3.2															
45	34.0	1.2	1.6	23.5	1.4	2.1	16.4	1.5	2.7	11.8	1.8	3.2	7.8	2.3	3.8												
50	37.8	1.2	1.6	26.1	1.4	2.1	18.3	1.5	2.7	13.2	1.8	3.2	9.5	2.1	3.8												
55	41.5	1.2	1.6	28.7	1.4	2.1	20.2	1.5	2.7	14.7	1.7	3.2	10.7	2.0	3.8												
60	45.3	1.2	1.6	31.3	1.4	2.1	22.1	1.5	2.7	16.1	1.7	3.2	11.8	2.0	3.8												
65	49.1	1.2	1.6	33.9	1.4	2.1	24.3	1.5	2.6	17.6	1.7	3.2	13.0	2.0	3.8	8.5	2.6	4.4									
70	52.9	1.2	1.6	36.5	1.4	2.1	26.2	1.5	2.6	19.0	1.7	3.2	14.1	2.0	3.8	10.0	2.4	4.3									
75	56.6	1.2	1.6	39.1	1.4	2.1	28.0	1.5	2.6	20.4	1.7	3.2	15.2	2.0	3.8	11.0	2.4	4.4									
80	60.4	1.2	1.6	41.7	1.4	2.1	29.9	1.5	2.6	21.8	1.7	3.2	16.3	1.9	3.8	11.9	2.3	4.4									
85	64.2	1.2	1.6	44.3	1.4	2.1	31.8	1.5	2.6	23.2	1.7	3.2	17.4	1.9	3.8	12.8	2.3	4.4	9.1	2.9	4.8						
90	67.9	1.2	1.6	46.9	1.4	2.1	33.6	1.5	2.6	24.6	1.7	3.2	18.5	1.9	3.8	13.7	2.3	4.4	10.3	2.7	4.8						
95	71.7	1.2	1.6	49.5	1.4	2.1	35.5	1.5	2.6	26.0	1.7	3.2	19.6	1.9	3.8	14.6	2.2	4.4	11.4	2.6	4.8						
100	75.5	1.2	1.6	52.1	1.4	2.1	37.3	1.5	2.6	27.8	1.7	3.2	20.7	1.9	3.8	15.4	2.2	4.4	12.2	2.6	4.8						
105	79.3	1.2	1.6	54.7	1.4	2.1	39.2	1.5	2.6	29.1	1.7	3.2	21.8	1.9	3.8	16.3	2.2	4.4	12.9	2.5	4.8						
110	83.0	1.2	1.6	57.3	1.4	2.1	41.1	1.5	2.6	30.5	1.7	3.2	22.8	1.9	3.8	17.2	2.2	4.4	13.7	2.5	4.8						
115	86.8	1.2	1.6	59.9	1.4	2.1	42.9	1.5	2.6	31.9	1.7	3.2	23.9	1.9	3.8	18.0	2.2	4.4	14.4	2.5	4.8	10.5	3.1	5.3			
120	90.6	1.2	1.6	62.5	1.4	2.1	44.8	1.5	2.7	33.3	1.7	3.2	25.0	1.9	3.8	18.9	2.2	4.4	15.2	2.5	4.8	11.4	3.0	5.3			
125	94.3	1.2	1.6	65.1	1.4	2.1	46.7	1.5	2.7	34.7	1.7	3.2	26.0	1.9	3.8	19.7	2.2	4.4	15.9	2.4	4.8	12.4	2.9	5.3			
130	98.1	1.2	1.6	67.7	1.4	2.1	48.5	1.5	2.7	36.0	1.7	3.2	27.1	1.9	3.8	20.5	2.2	4.4	16.6	2.4	4.8	13.0	2.8	5.3			
135	101.9	1.2	1.6	70.3	1.4	2.1	50.4	1.5	2.7	37.4	1.7	3.2	28.2	1.9	3.8	21.4	2.2	4.4	17.3	2.4	4.8	13.7	2.8	5.3			
140	105.7	1.2	1.6	72.9	1.4	2.1	52.2	1.5	2.7	38.8	1.7	3.2	29.3	1.9	3.8	22.2	2.2	4.4	18.0	2.4	4.9	14.3	2.8	5.3			
145	109.4	1.2	1.6	75.5	1.4	2.1	54.1	1.5	2.7	40.2	1.7	3.2	30.8	1.9	3.7	23.1	2.2	4.4	18.7	2.4	4.9	14.9	2.7	5.3			
150	113.2	1.2	1.6	78.1	1.4	2.1	56.0	1.5	2.7	41.6	1.7	3.2	31.9	1.9	3.7	23.9	2.1	4.4	19.4	2.4	4.9	15.5	2.7	5.3			

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 1.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5																											
10	8.2	1.2	1.6	5.2	1.4	2.0																					
15	12.6	1.1	1.6	8.7	1.3	2.1	5.5	1.6	2.6																		
20	17.1	1.1	1.6	11.8	1.2	2.1	8.2	1.4	2.6																		
25	21.4	1.1	1.6	14.9	1.2	2.1	10.5	1.4	2.6	7.3	1.6	3.1															
30	25.7	1.1	1.6	18.0	1.2	2.1	12.8	1.4	2.6	9.1	1.6	3.2															
35	29.9	1.1	1.6	21.2	1.2	2.1	15.0	1.3	2.6	10.9	1.5	3.1	7.8	1.8	3.7												
40	34.2	1.1	1.6	24.3	1.2	2.1	17.3	1.3	2.6	12.6	1.5	3.1	9.2	1.7	3.7												
45	38.5	1.1	1.6	27.3	1.2	2.1	19.5	1.3	2.6	14.3	1.5	3.1	10.6	1.7	3.7	7.2	2.2	4.3									
50	42.7	1.1	1.6	30.3	1.2	2.1	21.9	1.3	2.6	16.0	1.5	3.2	11.9	1.7	3.7	8.8	2.0	4.3									
55	47.0	1.1	1.6	33.3	1.2	2.1	24.1	1.3	2.6	17.7	1.5	3.2	13.3	1.7	3.7	9.9	1.9	4.3									
60	51.3	1.1	1.6	36.3	1.2	2.1	26.3	1.3	2.6	19.3	1.5	3.2	14.6	1.7	3.7	11.0	1.9	4.3									
65	55.5	1.1	1.6	39.4	1.2	2.1	28.5	1.3	2.6	21.0	1.5	3.2	15.9	1.6	3.7	12.1	1.9	4.3	8.0	2.5	4.9						
70	59.8	1.1	1.6	42.4	1.2	2.1	30.7	1.3	2.6	22.7	1.5	3.2	17.1	1.6	3.7	13.2	1.9	4.3	9.5	2.3	4.8						
75	64.1	1.1	1.6	45.4	1.2	2.1	32.9	1.3	2.6	24.6	1.5	3.1	18.5	1.6	3.7	14.2	1.8	4.3	10.4	2.2	4.9						
80	68.3	1.1	1.6	48.4	1.2	2.1	35.0	1.3	2.6	26.2	1.5	3.1	19.8	1.6	3.7	15.2	1.8	4.3	11.3	2.2	4.9						
85	72.6	1.1	1.6	51.5	1.2	2.1	37.2	1.3	2.6	27.9	1.5	3.1	21.0	1.6	3.7	16.3	1.8	4.3	12.1	2.2	4.9	8.8	2.7	5.4			
90	76.9	1.1	1.6	54.5	1.2	2.1	39.4	1.3	2.6	29.5	1.5	3.1	22.3	1.6	3.7	17.3	1.8	4.3	13.0	2.1	4.9	9.8	2.6	5.4			
95	81.1	1.1	1.6	57.5	1.2	2.1	41.6	1.3	2.6	31.1	1.5	3.1	23.6	1.6	3.7	18.3	1.8	4.3	13.8	2.1	4.9	10.9	2.5	5.3			
100	85.4	1.1	1.6	60.5	1.2	2.1	43.8	1.3	2.6	32.7	1.5	3.1	24.9	1.6	3.7	19.3	1.8	4.3	14.6	2.1	4.9	11.6	2.4	5.4			
105	89.7	1.1	1.6	63.6	1.2	2.1	46.0	1.3	2.6	34.4	1.5	3.1	26.5	1.6	3.7	20.3	1.8	4.3	15.4	2.1	4.9	12.4	2.4	5.4	9.7	2.8	5.8
110	94.0	1.1	1.6	66.6	1.2	2.1	48.2	1.3	2.6	36.0	1.5	3.1	27.7	1.6	3.7	21.3	1.8	4.3	16.2	2.1	4.9	13.1	2.4	5.4	10.8	2.6	5.8
115	98.2	1.1	1.6	69.6	1.2	2.1	50.4	1.3	2.6	37.6	1.5	3.1	29.0	1.6	3.7	22.3	1.8	4.3	17.0	2.1	4.9	13.8	2.3	5.4	11.5	2.6	5.8
120	102.5	1.1	1.6	72.6	1.2	2.1	52.5	1.3	2.6	39.3	1.5	3.1	30.2	1.6	3.7	23.3	1.8	4.3	17.9	2.1	4.9	14.5	2.3	5.4	12.2	2.6	5.8
125	106.8	1.1	1.6	75.7	1.2	2.1	54.7	1.3	2.6	40.9	1.5	3.1	31.5	1.6	3.7	24.3	1.8	4.3	18.7	2.1	4.9	15.2	2.3	5.4	12.8	2.5	5.8
130	111.0	1.1	1.6	78.7	1.2	2.1	56.9	1.3	2.6	42.5	1.5	3.1	32.7	1.6	3.7	25.3	1.8	4.3	19.4	2.1	4.9	15.9	2.3	5.4	13.4	2.5	5.8
135	115.3	1.1	1.6	81.7	1.2	2.1	59.1	1.3	2.6	44.2	1.5	3.1	34.0	1.6	3.7	26.3	1.8	4.3	20.2	2.0	4.9	16.6	2.3	5.4	14.1	2.5	5.8
140	119.6	1.1	1.6	84.7	1.2	2.1	61.3	1.3	2.6	45.8	1.5	3.1	35.2	1.6	3.7	27.3	1.8	4.3	21.0	2.0	4.9	17.2	2.3	5.4	14.7	2.5	5.8
145	123.8	1.1	1.6	87.8	1.2	2.1	63.5	1.3	2.6	47.5	1.5	3.1	36.5	1.6	3.7	28.7	1.8	4.3	21.8	2.0	4.9	17.9	2.3	5.4	15.3	2.5	5.8
150	128.1	1.1	1.6	90.8	1.2	2.1	65.7	1.3	2.6	49.1	1.5	3.1	37.8	1.6	3.7	29.7	1.8	4.3	22.6	2.0	4.9	18.6	2.3	5.4	15.9	2.4	5.8

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 1.25 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	4.1	1.2	1.5																								
10	9.4	1.0	1.5	6.3	1.2	2.0																					
15	14.3	1.0	1.6	9.9	1.1	2.0	6.8	1.3	2.6																		
20	19.4	1.0	1.5	13.4	1.1	2.0	9.5	1.2	2.6	6.7	1.4	3.1															
25	24.2	1.0	1.5	17.0	1.1	2.0	12.1	1.2	2.6	8.8	1.4	3.1	5.9	1.7	3.6												
30	29.0	1.0	1.6	20.4	1.1	2.0	14.6	1.2	2.6	10.7	1.4	3.1	7.8	1.6	3.7												
35	33.8	1.0	1.6	23.8	1.1	2.0	17.1	1.2	2.6	12.7	1.3	3.1	9.4	1.5	3.7	6.5	1.9	4.2									
40	38.6	1.0	1.6	27.1	1.1	2.0	19.8	1.2	2.5	14.6	1.3	3.1	10.9	1.5	3.7	8.1	1.7	4.2									
45	43.5	1.0	1.6	30.5	1.1	2.0	22.3	1.2	2.5	16.5	1.3	3.1	12.5	1.5	3.7	9.4	1.7	4.2									
50	48.3	1.0	1.6	33.9	1.1	2.0	24.8	1.2	2.5	18.3	1.3	3.1	13.9	1.5	3.7	10.6	1.7	4.2	7.7	2.0	4.8						
55	53.1	1.0	1.6	37.3	1.1	2.0	27.2	1.2	2.6	20.5	1.3	3.1	15.4	1.5	3.7	11.8	1.6	4.3	9.0	1.9	4.8						
60	57.9	1.0	1.6	40.7	1.1	2.0	29.7	1.2	2.6	22.3	1.3	3.1	16.9	1.5	3.7	13.0	1.6	4.3	10.1	1.9	4.8						
65	62.8	1.0	1.6	44.1	1.1	2.0	32.2	1.2	2.6	24.2	1.3	3.1	18.3	1.5	3.7	14.2	1.6	4.3	11.1	1.8	4.8	8.0	2.3	5.3			
70	67.6	1.0	1.6	47.5	1.1	2.0	34.6	1.2	2.6	26.0	1.3	3.1	19.8	1.4	3.7	15.4	1.6	4.3	12.0	1.8	4.8	9.3	2.1	5.3			
75	72.4	1.0	1.6	50.8	1.1	2.0	37.1	1.2	2.6	27.9	1.3	3.1	21.2	1.4	3.7	16.5	1.6	4.3	13.0	1.8	4.8	10.1	2.1	5.3			
80	77.2	1.0	1.6	54.2	1.1	2.0	39.6	1.2	2.6	29.7	1.3	3.1	23.0	1.4	3.6	17.7	1.6	4.3	14.0	1.8	4.8	11.0	2.0	5.3			
85	82.1	1.0	1.6	57.6	1.1	2.0	42.0	1.2	2.6	31.6	1.3	3.1	24.4	1.4	3.6	18.8	1.6	4.3	14.9	1.8	4.8	11.8	2.0	5.3			
90	86.9	1.0	1.6	61.0	1.1	2.0	44.5	1.2	2.6	33.5	1.3	3.1	25.8	1.4	3.6	20.0	1.6	4.3	15.9	1.8	4.8	12.6	2.0	5.3	9.1	2.5	5.9
95	91.7	1.0	1.6	64.4	1.1	2.0	47.0	1.2	2.6	35.3	1.3	3.1	27.3	1.4	3.6	21.1	1.6	4.3	16.8	1.8	4.8	13.4	2.0	5.4	10.2	2.4	5.9
100	96.6	1.0	1.6	67.8	1.1	2.0	49.4	1.2	2.6	37.2	1.3	3.1	28.7	1.4	3.6	22.3	1.6	4.3	17.7	1.8	4.8	14.2	2.0	5.4	10.9	2.3	5.9
105	101.4	1.0	1.6	71.2	1.1	2.0	51.9	1.2	2.6	39.0	1.3	3.1	30.1	1.4	3.6	23.4	1.6	4.3	18.7	1.8	4.8	15.0	2.0	5.4	11.6	2.3	5.9
110	106.2	1.0	1.6	74.6	1.1	2.0	54.4	1.2	2.6	40.9	1.3	3.1	31.6	1.4	3.6	24.6	1.6	4.3	19.6	1.7	4.8	15.8	2.0	5.4	12.3	2.3	5.9
115	111.0	1.0	1.6	78.0	1.1	2.0	56.8	1.2	2.6	42.7	1.3	3.1	33.0	1.4	3.6	26.1	1.6	4.2	20.5	1.7	4.8	16.6	1.9	5.4	13.0	2.2	5.9
120	115.9	1.0	1.6	81.3	1.1	2.0	59.3	1.2	2.6	44.6	1.3	3.1	34.4	1.4	3.6	27.2	1.6	4.2	21.5	1.7	4.8	17.3	1.9	5.4	13.6	2.2	5.9
125	120.7	1.0	1.6	84.7	1.1	2.0	61.8	1.2	2.6	46.4	1.3	3.1	35.9	1.4	3.6	28.3	1.6	4.2	22.4	1.7	4.8	18.1	1.9	5.4	14.3	2.2	5.9
130	125.5	1.0	1.6	88.1	1.1	2.0	64.3	1.2	2.6	48.3	1.3	3.1	37.3	1.4	3.7	29.5	1.6	4.2	23.3	1.7	4.8	18.9	1.9	5.4	14.9	2.2	5.9
135	130.3	1.0	1.6	91.5	1.1	2.0	66.7	1.2	2.6	50.2	1.3	3.1	38.7	1.4	3.7	30.6	1.6	4.2	24.2	1.7	4.8	19.6	1.9	5.4	15.6	2.2	5.9
140	135.2	1.0	1.6	94.9	1.1	2.0	69.2	1.2	2.6	52.0	1.3	3.1	40.2	1.4	3.7	31.7	1.6	4.2	25.1	1.7	4.8	20.4	1.9	5.4	16.2	2.2	5.9
145	140.0	1.0	1.6	98.3	1.1	2.0	71.7	1.2	2.6	53.9	1.3	3.1	41.6	1.4	3.7	32.9	1.6	4.2	26.1	1.7	4.8	21.2	1.9	5.4	16.9	2.2	5.9
150	144.8	1.0	1.6	101.7	1.1	2.0	74.1	1.2	2.6	55.7	1.3	3.1	43.0	1.4	3.7	34.0	1.6	4.2	27.0	1.7	4.8	21.9	1.9	5.4	17.5	2.2	5.9

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 1.50 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	4.9	1.0	1.5																								
10	10.5	0.9	1.5	7.1	1.1	2.0	4.6	1.3	2.5																		
15	16.0	0.9	1.5	10.9	1.0	2.0	7.8	1.1	2.5	5.3	1.4	3.1															
20	21.3	0.9	1.5	14.7	1.0	2.0	10.6	1.1	2.5	7.7	1.3	3.1	5.1	1.6	3.6												
25	26.6	0.9	1.5	18.6	1.0	2.0	13.4	1.1	2.5	9.9	1.2	3.1	7.3	1.4	3.6												
30	31.9	0.9	1.5	22.3	1.0	2.0	16.2	1.1	2.5	12.0	1.2	3.1	9.0	1.4	3.6	6.6	1.6	4.2									
35	37.3	0.9	1.5	26.0	1.0	2.0	19.1	1.1	2.5	14.1	1.2	3.1	10.7	1.4	3.6	8.1	1.5	4.2									
40	42.6	0.9	1.5	29.7	1.0	2.0	21.8	1.1	2.5	16.2	1.2	3.1	12.4	1.3	3.6	9.5	1.5	4.2	6.9	1.8	4.7						
45	47.9	0.9	1.5	33.4	1.0	2.0	24.5	1.1	2.5	18.3	1.2	3.1	14.0	1.3	3.6	10.8	1.5	4.2	8.3	1.7	4.7						
50	53.2	0.9	1.5	37.1	1.0	2.0	27.3	1.1	2.5	20.6	1.2	3.0	15.7	1.3	3.6	12.1	1.5	4.2	9.4	1.7	4.8						
55	58.5	0.9	1.5	40.8	1.0	2.0	30.0	1.1	2.5	22.7	1.2	3.0	17.3	1.3	3.6	13.4	1.5	4.2	10.5	1.6	4.8	8.1	1.9	5.3			
60	63.8	0.9	1.5	44.5	1.0	2.0	32.7	1.1	2.5	24.7	1.2	3.0	18.9	1.3	3.6	14.7	1.4	4.2	11.6	1.6	4.8	9.1	1.9	5.3			
65	69.2	0.9	1.5	48.2	1.0	2.0	35.4	1.1	2.5	26.8	1.2	3.1	20.8	1.3	3.6	16.0	1.4	4.2	12.7	1.6	4.8	10.0	1.8	5.3			
70	74.5	0.9	1.5	51.9	1.0	2.0	38.2	1.1	2.5	28.8	1.2	3.1	22.4	1.3	3.6	17.3	1.4	4.2	13.7	1.6	4.8	10.9	1.8	5.3	8.2	2.2	5.8
75	79.8	0.9	1.5	55.6	1.0	2.0	40.9	1.1	2.5	30.9	1.2	3.1	23.9	1.3	3.6	18.6	1.4	4.2	14.8	1.6	4.8	11.8	1.8	5.3	9.3	2.1	5.8
80	85.1	0.9	1.5	59.4	1.0	2.0	43.6	1.1	2.5	32.9	1.2	3.1	25.5	1.3	3.6	19.9	1.4	4.2	15.8	1.6	4.8	12.7	1.8	5.3	10.1	2.0	5.9
85	90.4	0.9	1.5	63.1	1.0	2.0	46.3	1.1	2.5	35.0	1.2	3.1	27.1	1.3	3.6	21.2	1.4	4.2	16.9	1.6	4.8	13.6	1.8	5.3	10.9	2.0	5.9
90	95.8	0.9	1.5	66.8	1.0	2.0	49.0	1.1	2.5	37.1	1.2	3.1	28.7	1.3	3.6	22.8	1.4	4.1	17.9	1.6	4.8	14.5	1.8	5.3	11.6	2.0	5.9
95	101.1	0.9	1.5	70.5	1.0	2.0	51.8	1.1	2.5	39.1	1.2	3.1	30.3	1.3	3.6	24.0	1.4	4.2	18.9	1.6	4.8	15.3	1.7	5.3	12.4	2.0	5.9
100	106.4	0.9	1.5	74.2	1.0	2.0	54.5	1.1	2.5	41.2	1.2	3.1	31.9	1.3	3.6	25.3	1.4	4.2	20.0	1.6	4.8	16.2	1.7	5.3	13.1	1.9	5.9
105	111.7	0.9	1.5	77.9	1.0	2.0	57.2	1.1	2.5	43.2	1.2	3.1	33.5	1.3	3.6	26.5	1.4	4.2	21.0	1.6	4.8	17.0	1.7	5.3	13.9	1.9	5.9
110	117.0	0.9	1.5	81.6	1.0	2.0	59.9	1.1	2.5	45.3	1.2	3.1	35.1	1.3	3.6	27.8	1.4	4.2	22.0	1.6	4.8	17.9	1.7	5.3	14.6	1.9	5.9
115	122.4	0.9	1.5	85.3	1.0	2.0	62.6	1.1	2.5	47.3	1.2	3.1	36.7	1.3	3.6	29.1	1.4	4.2	23.1	1.6	4.8	18.8	1.7	5.3	15.3	1.9	5.9
120	127.7	0.9	1.5	89.0	1.0	2.0	65.4	1.1	2.5	49.4	1.2	3.1	38.3	1.3	3.6	30.3	1.4	4.2	24.1	1.6	4.8	19.6	1.7	5.3	16.1	1.9	5.9
125	133.0	0.9	1.5	92.7	1.0	2.0	68.1	1.1	2.5	51.4	1.2	3.1	39.9	1.3	3.6	31.6	1.4	4.2	25.4	1.6	4.8	20.5	1.7	5.3	16.8	1.9	5.9
130	138.3	0.9	1.5	96.4	1.0	2.0	70.8	1.1	2.5	53.5	1.2	3.1	41.4	1.3	3.6	32.8	1.4	4.2	26.4	1.6	4.8	21.3	1.7	5.3	17.5	1.9	5.9
135	143.6	0.9	1.5	100.1	1.0	2.0	73.5	1.1	2.5	55.6	1.2	3.1	43.0	1.3	3.6	34.1	1.4	4.2	27.4	1.6	4.8	22.2	1.7	5.3	18.2	1.9	5.9
140	149.0	0.9	1.5	103.9	1.0	2.0	76.3	1.1	2.5	57.6	1.2	3.1	44.6	1.3	3.6	35.3	1.4	4.2	28.5	1.6	4.8	23.0	1.7	5.3	18.9	1.9	5.9
145	154.3	0.9	1.5	107.6	1.0	2.0	79.0	1.1	2.5	59.7	1.2	3.1	46.2	1.3	3.6	36.6	1.4	4.2	29.5	1.6	4.8	23.8	1.7	5.3	19.7	1.9	5.9
150	159.6	0.9	1.5	111.3	1.0	2.0	81.7	1.1	2.5	61.7	1.2	3.1	47.8	1.3	3.6	37.9	1.4	4.2	30.5	1.6	4.8	24.7	1.7	5.3	20.4	1.9	5.9

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 1.75 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	5.4	0.9	1.5																								
10	11.4	0.9	1.5	7.7	1.0	2.0	5.4	1.1	2.5																		
15	17.3	0.9	1.5	11.8	1.0	2.0	8.6	1.1	2.5	6.2	1.2	3.0															
20	23.1	0.9	1.5	16.0	0.9	2.0	11.6	1.0	2.5	8.6	1.2	3.0	6.3	1.3	3.6												
25	28.8	0.9	1.5	20.0	0.9	2.0	14.6	1.0	2.5	10.9	1.1	3.0	8.2	1.3	3.6	5.9	1.5	4.1									
30	34.6	0.9	1.5	24.0	0.9	2.0	17.8	1.0	2.5	13.2	1.1	3.0	10.1	1.2	3.6	7.6	1.4	4.2									
35	40.3	0.9	1.5	28.0	0.9	2.0	20.7	1.0	2.5	15.5	1.1	3.0	11.9	1.2	3.6	9.1	1.4	4.2	6.9	1.6	4.7						
40	46.1	0.9	1.5	32.0	0.9	2.0	23.7	1.0	2.5	18.0	1.1	3.0	13.7	1.2	3.6	10.6	1.4	4.2	8.2	1.6	4.7						
45	51.9	0.9	1.5	36.0	0.9	2.0	26.6	1.0	2.5	20.2	1.1	3.0	15.4	1.2	3.6	12.0	1.3	4.2	9.4	1.5	4.7	7.0	1.8	5.3			
50	57.6	0.9	1.5	40.0	0.9	2.0	29.6	1.0	2.5	22.4	1.1	3.0	17.2	1.2	3.6	13.5	1.3	4.1	10.6	1.5	4.7	8.3	1.7	5.3			
55	63.4	0.9	1.5	44.0	0.9	2.0	32.5	1.0	2.5	24.7	1.1	3.0	19.2	1.2	3.6	14.9	1.3	4.1	11.8	1.5	4.7	9.3	1.7	5.3	6.7	2.1	5.8
60	69.1	0.9	1.5	48.0	0.9	2.0	35.5	1.0	2.5	26.9	1.1	3.0	20.9	1.2	3.6	16.3	1.3	4.1	12.9	1.5	4.7	10.3	1.6	5.3	8.1	1.9	5.8
65	74.9	0.9	1.5	52.0	0.9	2.0	38.4	1.0	2.5	29.2	1.1	3.0	22.7	1.2	3.6	17.7	1.3	4.1	14.1	1.5	4.7	11.3	1.6	5.3	9.0	1.9	5.8
70	80.7	0.9	1.5	56.0	0.9	2.0	41.4	1.0	2.5	31.4	1.1	3.0	24.4	1.2	3.6	19.1	1.3	4.1	15.2	1.5	4.7	12.3	1.6	5.3	9.8	1.8	5.8
75	86.4	0.9	1.5	60.0	0.9	2.0	44.3	1.0	2.5	33.6	1.1	3.0	26.1	1.2	3.6	20.5	1.3	4.1	16.4	1.4	4.7	13.2	1.6	5.3	10.7	1.8	5.8
80	92.2	0.9	1.5	63.9	0.9	2.0	47.3	1.0	2.5	35.9	1.1	3.0	27.9	1.2	3.6	22.2	1.3	4.1	17.5	1.4	4.7	14.2	1.6	5.3	11.5	1.8	5.8
85	97.9	0.9	1.5	67.9	0.9	2.0	50.2	1.0	2.5	38.1	1.1	3.0	29.6	1.2	3.6	23.5	1.3	4.1	18.6	1.4	4.7	15.1	1.6	5.3	12.3	1.8	5.8
90	103.7	0.9	1.5	71.9	0.9	2.0	53.2	1.0	2.5	40.3	1.1	3.0	31.4	1.2	3.6	24.9	1.3	4.1	19.8	1.4	4.7	16.1	1.6	5.3	13.1	1.8	5.8
95	109.5	0.9	1.5	75.9	0.9	2.0	56.1	1.0	2.5	42.6	1.1	3.0	33.1	1.2	3.6	26.3	1.3	4.1	20.9	1.4	4.7	17.0	1.6	5.3	13.9	1.7	5.8
100	115.2	0.9	1.5	79.9	0.9	2.0	59.1	1.0	2.5	44.8	1.1	3.0	34.8	1.2	3.6	27.7	1.3	4.1	22.0	1.4	4.7	17.9	1.6	5.3	14.7	1.7	5.8
105	121.0	0.9	1.5	83.9	0.9	2.0	62.0	1.0	2.5	47.1	1.1	3.0	36.6	1.2	3.6	29.0	1.3	4.1	23.4	1.4	4.7	18.9	1.6	5.3	15.5	1.7	5.8
110	126.8	0.9	1.5	87.9	0.9	2.0	65.0	1.0	2.5	49.3	1.1	3.0	38.3	1.2	3.6	30.4	1.3	4.1	24.5	1.4	4.7	19.8	1.6	5.3	16.3	1.7	5.8
115	132.5	0.9	1.5	91.9	0.9	2.0	67.9	1.0	2.5	51.5	1.1	3.0	40.1	1.2	3.6	31.8	1.3	4.1	25.6	1.4	4.7	20.7	1.6	5.3	17.1	1.7	5.9
120	138.3	0.9	1.5	95.9	0.9	2.0	70.9	1.0	2.5	53.8	1.1	3.0	41.8	1.2	3.6	33.2	1.3	4.1	26.8	1.4	4.7	21.7	1.6	5.3	17.9	1.7	5.9
125	144.0	0.9	1.5	99.9	0.9	2.0	73.8	1.0	2.5	56.0	1.1	3.0	43.5	1.2	3.6	34.6	1.3	4.1	27.9	1.4	4.7	22.6	1.6	5.3	18.7	1.7	5.9
130	149.8	0.9	1.5	103.9	0.9	2.0	76.8	1.0	2.5	58.3	1.1	3.0	45.3	1.2	3.6	35.9	1.3	4.1	29.0	1.4	4.7	23.5	1.6	5.3	19.4	1.7	5.9
135	155.6	0.9	1.5	107.9	0.9	2.0	79.7	1.0	2.5	60.5	1.1	3.0	47.0	1.2	3.6	37.3	1.3	4.1	30.1	1.4	4.7	24.5	1.6	5.3	20.2	1.7	5.9
140	161.3	0.9	1.5	111.9	0.9	2.0	82.7	1.0	2.5	62.7	1.1	3.0	48.8	1.2	3.6	38.7	1.3	4.1	31.2	1.4	4.7	25.7	1.6	5.3	21.0	1.7	5.9
145	167.1	0.9	1.5	115.9	0.9	2.0	85.6	1.0	2.5	65.0	1.1	3.0	50.5	1.2	3.6	40.1	1.3	4.1	32.3	1.4	4.7	26.6	1.6	5.3	21.8	1.7	5.9
150	172.8	0.9	1.5	119.9	0.9	2.0	88.6	1.0	2.5	67.2	1.1	3.0	52.2	1.2	3.6	41.5	1.3	4.1	33.4	1.4	4.7	27.5	1.6	5.3	22.6	1.7	5.9

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 2.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	5.9	0.9	1.5																								
10	12.4	0.8	1.5	8.1	0.9	2.0	5.9	1.0	2.5																		
15	18.5	0.8	1.5	12.3	0.9	2.0	9.3	1.0	2.5	6.8	1.1	3.0	4.7	1.4	3.5												
20	24.7	0.8	1.5	16.7	0.9	2.0	12.5	1.0	2.5	9.4	1.1	3.0	7.0	1.2	3.6	4.7	1.5	4.1									
25	30.8	0.8	1.5	20.8	0.9	2.0	15.9	1.0	2.4	11.8	1.1	3.0	9.0	1.2	3.5	6.8	1.3	4.1									
30	37.0	0.8	1.5	25.0	0.9	2.0	19.0	1.0	2.5	14.3	1.1	3.0	11.0	1.2	3.5	8.5	1.3	4.1	6.4	1.5	4.7						
35	43.2	0.8	1.5	29.1	0.9	2.0	22.2	1.0	2.5	16.9	1.0	3.0	12.9	1.1	3.5	10.1	1.3	4.1	7.8	1.4	4.7						
40	49.3	0.8	1.5	33.3	0.9	2.0	25.3	1.0	2.5	19.3	1.0	3.0	14.8	1.1	3.5	11.6	1.3	4.1	9.1	1.4	4.7	7.1	1.6	5.2			
45	55.5	0.8	1.5	37.4	0.9	2.0	28.5	1.0	2.5	21.7	1.0	3.0	16.7	1.1	3.5	13.1	1.3	4.1	10.4	1.4	4.7	8.2	1.6	5.2			
50	61.7	0.8	1.5	41.6	0.9	2.0	31.7	1.0	2.5	24.1	1.0	3.0	18.8	1.1	3.5	14.7	1.2	4.1	11.7	1.4	4.7	9.3	1.5	5.3	7.1	1.8	5.8
55	67.8	0.8	1.5	45.7	0.9	2.0	34.8	1.0	2.5	26.5	1.0	3.0	20.7	1.1	3.5	16.2	1.2	4.1	12.9	1.4	4.7	10.4	1.5	5.3	8.2	1.7	5.8
60	74.0	0.8	1.5	49.9	0.9	2.0	38.0	1.0	2.5	28.9	1.0	3.0	22.6	1.1	3.5	17.7	1.2	4.1	14.1	1.4	4.7	11.4	1.5	5.3	9.2	1.7	5.8
65	80.2	0.8	1.5	54.0	0.9	2.0	41.1	1.0	2.5	31.4	1.0	3.0	24.5	1.1	3.5	19.5	1.2	4.1	15.4	1.3	4.7	12.4	1.5	5.3	10.1	1.7	5.8
70	86.3	0.8	1.5	58.2	0.9	2.0	44.3	1.0	2.5	33.8	1.0	3.0	26.3	1.1	3.5	21.0	1.2	4.1	16.6	1.3	4.7	13.5	1.5	5.3	11.0	1.6	5.8
75	92.5	0.8	1.5	62.3	0.9	2.0	47.5	1.0	2.5	36.2	1.0	3.0	28.2	1.1	3.5	22.4	1.2	4.1	17.8	1.3	4.7	14.5	1.5	5.3	11.8	1.6	5.8
80	98.7	0.8	1.5	66.5	0.9	2.0	50.6	1.0	2.5	38.6	1.0	3.0	30.1	1.1	3.5	23.9	1.2	4.1	19.0	1.3	4.7	15.5	1.5	5.3	12.7	1.6	5.8
85	104.8	0.8	1.5	70.6	0.9	2.0	53.8	1.0	2.5	41.0	1.0	3.0	32.0	1.1	3.5	25.4	1.2	4.1	20.3	1.3	4.7	16.5	1.5	5.3	13.6	1.6	5.8
90	111.0	0.8	1.5	74.8	0.9	2.0	57.0	1.0	2.5	43.4	1.0	3.0	33.8	1.1	3.5	26.9	1.2	4.1	21.8	1.3	4.6	17.5	1.5	5.3	14.4	1.6	5.8
95	117.2	0.8	1.5	78.9	0.9	2.0	60.1	1.0	2.5	45.8	1.0	3.0	35.7	1.1	3.5	28.4	1.2	4.1	23.0	1.3	4.6	18.6	1.5	5.3	15.3	1.6	5.8
100	123.3	0.8	1.5	83.1	0.9	2.0	63.3	1.0	2.5	48.2	1.0	3.0	37.6	1.1	3.5	29.9	1.2	4.1	24.2	1.3	4.6	19.6	1.5	5.3	16.2	1.6	5.8
105	129.5	0.8	1.5	87.3	0.9	2.0	66.4	1.0	2.5	50.6	1.0	3.0	39.5	1.1	3.5	31.4	1.2	4.1	25.4	1.3	4.6	20.6	1.5	5.3	17.0	1.6	5.8
110	135.7	0.8	1.5	91.4	0.9	2.0	69.6	1.0	2.5	53.0	1.0	3.0	41.3	1.1	3.5	32.9	1.2	4.1	26.6	1.3	4.7	21.6	1.4	5.3	17.9	1.6	5.8
115	141.8	0.8	1.5	95.6	0.9	2.0	72.8	1.0	2.5	55.4	1.0	3.0	43.2	1.1	3.5	34.4	1.2	4.1	27.9	1.3	4.7	22.6	1.4	5.3	18.7	1.6	5.8
120	148.0	0.8	1.5	99.7	0.9	2.0	75.9	1.0	2.5	57.9	1.0	3.0	45.1	1.1	3.5	35.9	1.2	4.1	29.1	1.3	4.7	23.9	1.4	5.2	19.5	1.6	5.8
125	154.1	0.8	1.5	103.9	0.9	2.0	79.1	1.0	2.5	60.3	1.0	3.0	47.0	1.1	3.5	37.4	1.2	4.1	30.3	1.3	4.7	24.8	1.4	5.2	20.4	1.6	5.8
130	160.3	0.8	1.5	108.0	0.9	2.0	82.3	1.0	2.5	62.7	1.0	3.0	48.8	1.1	3.5	38.9	1.2	4.1	31.5	1.3	4.7	25.8	1.4	5.3	21.2	1.6	5.8
135	166.5	0.8	1.5	112.2	0.9	2.0	85.4	1.0	2.5	65.1	1.0	3.0	50.7	1.1	3.5	40.3	1.2	4.1	32.7	1.3	4.7	26.8	1.4	5.3	22.1	1.6	5.8
140	172.6	0.8	1.5	116.3	0.9	2.0	88.6	1.0	2.5	67.5	1.0	3.0	52.6	1.1	3.5	41.8	1.2	4.1	33.9	1.3	4.7	27.8	1.4	5.3	22.9	1.6	5.8
145	178.8	0.8	1.5	120.5	0.9	2.0	91.8	1.0	2.5	69.9	1.0	3.0	54.5	1.1	3.5	43.3	1.2	4.1	35.1	1.3	4.7	28.8	1.4	5.3	23.7	1.6	5.8
150	185.0	0.8	1.5	124.6	0.9	2.0	94.9	1.0	2.5	72.3	1.0	3.0	56.4	1.1	3.5	44.8	1.2	4.1	36.3	1.3	4.7	29.8	1.4	5.3	24.6	1.6	5.8

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 3.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	7.4	0.7	1.4	4.9	0.8	1.9	3.2	1.0	2.3																		
10	15.1	0.7	1.4	10.2	0.8	1.9	7.6	0.8	2.4	5.7	0.9	2.9	4.0	1.1	3.4												
15	22.6	0.7	1.4	15.6	0.8	1.9	11.5	0.8	2.4	8.8	0.9	2.9	6.7	1.0	3.4	5.1	1.1	4.0									
20	30.1	0.7	1.4	20.7	0.8	1.9	15.5	0.8	2.4	11.8	0.9	2.9	9.2	0.9	3.4	7.2	1.0	4.0	5.5	1.2	4.6						
25	37.6	0.7	1.4	25.9	0.8	1.9	19.4	0.8	2.4	15.0	0.9	2.9	11.6	0.9	3.4	9.2	1.0	4.0	7.2	1.1	4.6	5.6	1.3	5.1			
30	45.1	0.7	1.4	31.1	0.8	1.9	23.3	0.8	2.4	18.0	0.9	2.9	14.0	0.9	3.4	11.1	1.0	4.0	8.9	1.1	4.6	7.1	1.2	5.2	5.3	1.5	5.7
35	52.7	0.7	1.4	36.2	0.8	1.9	27.1	0.8	2.4	21.0	0.9	2.9	16.5	0.9	3.4	13.0	1.0	4.0	10.5	1.1	4.6	8.4	1.2	5.2	6.7	1.4	5.7
40	60.2	0.7	1.4	41.4	0.8	1.9	31.0	0.8	2.4	24.0	0.9	2.9	18.9	0.9	3.4	14.9	1.0	4.0	12.0	1.1	4.6	9.8	1.2	5.2	7.9	1.3	5.7
45	67.7	0.7	1.4	46.6	0.8	1.9	34.9	0.8	2.4	27.0	0.9	2.9	21.2	0.9	3.4	17.0	1.0	4.0	13.6	1.1	4.6	11.1	1.2	5.2	9.1	1.3	5.7
50	75.2	0.7	1.4	51.8	0.8	1.9	38.8	0.8	2.4	29.9	0.9	2.9	23.6	0.9	3.4	18.9	1.0	4.0	15.2	1.1	4.6	12.4	1.2	5.2	10.2	1.3	5.7
55	82.8	0.7	1.4	56.9	0.8	1.9	42.6	0.8	2.4	32.9	0.9	2.9	25.9	0.9	3.4	20.8	1.0	4.0	16.7	1.1	4.6	13.7	1.2	5.2	11.3	1.3	5.7
60	90.3	0.7	1.4	62.1	0.8	1.9	46.5	0.8	2.4	35.9	0.9	2.9	28.3	0.9	3.4	22.7	1.0	4.0	18.5	1.1	4.5	14.9	1.2	5.2	12.4	1.3	5.7
65	97.8	0.7	1.4	67.3	0.8	1.9	50.4	0.8	2.4	38.9	0.9	2.9	30.6	0.9	3.4	24.6	1.0	4.0	20.0	1.1	4.5	16.2	1.2	5.2	13.5	1.3	5.7
70	105.3	0.7	1.4	72.4	0.8	1.9	54.3	0.8	2.4	41.9	0.9	2.9	33.0	0.9	3.4	26.4	1.0	4.0	21.5	1.1	4.5	17.5	1.2	5.2	14.5	1.3	5.7
75	112.8	0.7	1.4	77.6	0.8	1.9	58.1	0.8	2.4	44.9	0.9	2.9	35.3	0.9	3.4	28.3	1.0	4.0	23.1	1.1	4.5	19.1	1.2	5.1	15.6	1.3	5.7
80	120.4	0.7	1.4	82.8	0.8	1.9	62.0	0.8	2.4	47.9	0.9	2.9	37.7	0.9	3.4	30.2	1.0	4.0	24.6	1.1	4.5	20.3	1.2	5.1	16.7	1.3	5.7
85	127.9	0.7	1.4	88.0	0.8	1.9	65.9	0.8	2.4	50.9	0.9	2.9	40.1	0.9	3.4	32.1	1.0	4.0	26.1	1.1	4.5	21.6	1.2	5.1	17.8	1.2	5.7
90	135.4	0.7	1.4	93.1	0.8	1.9	69.8	0.8	2.4	53.9	0.9	2.9	42.4	0.9	3.4	34.0	1.0	4.0	27.7	1.1	4.5	22.9	1.2	5.1	18.9	1.2	5.7
95	142.9	0.7	1.4	98.3	0.8	1.9	73.6	0.8	2.4	56.9	0.9	2.9	44.8	0.9	3.4	35.9	1.0	4.0	29.2	1.1	4.5	24.1	1.2	5.1	20.2	1.2	5.7
100	150.5	0.7	1.4	103.5	0.8	1.9	77.5	0.8	2.4	59.9	0.9	2.9	47.1	0.9	3.4	37.8	1.0	4.0	30.7	1.1	4.5	25.4	1.2	5.1	21.2	1.2	5.7
105	158.0	0.7	1.4	108.7	0.8	1.9	81.4	0.8	2.4	62.8	0.9	2.9	49.5	0.9	3.4	39.6	1.0	4.0	32.3	1.1	4.5	26.7	1.2	5.1	22.3	1.2	5.7
110	165.5	0.7	1.4	113.8	0.8	1.9	85.3	0.8	2.4	65.8	0.9	2.9	51.8	0.9	3.4	41.5	1.0	4.0	33.8	1.1	4.6	27.9	1.2	5.1	23.3	1.2	5.7
115	173.0	0.7	1.4	119.0	0.8	1.9	89.1	0.8	2.4	68.8	0.9	2.9	54.2	0.9	3.4	43.4	1.0	4.0	35.4	1.1	4.6	29.2	1.2	5.1	24.4	1.2	5.7
120	180.5	0.7	1.4	124.2	0.8	1.9	93.0	0.8	2.4	71.8	0.9	2.9	56.5	0.9	3.4	45.3	1.0	4.0	36.9	1.1	4.6	30.5	1.2	5.1	25.5	1.2	5.7
125	188.1	0.7	1.4	129.4	0.8	1.9	96.9	0.8	2.4	74.8	0.9	2.9	58.9	0.9	3.4	47.2	1.0	4.0	38.4	1.1	4.6	31.7	1.2	5.1	26.5	1.2	5.7
130	195.6	0.7	1.4	134.5	0.8	1.9	100.8	0.8	2.4	77.8	0.9	2.9	61.2	0.9	3.4	49.1	1.0	4.0	40.0	1.1	4.6	33.0	1.2	5.1	27.6	1.2	5.7
135	203.1	0.7	1.4	139.7	0.8	1.9	104.6	0.8	2.4	80.8	0.9	2.9	63.6	0.9	3.4	51.0	1.0	4.0	41.5	1.1	4.6	34.3	1.2	5.1	28.6	1.2	5.7
140	210.6	0.7	1.4	144.9	0.8	1.9	108.5	0.8	2.4	83.8	0.9	2.9	66.0	0.9	3.4	52.8	1.0	4.0	43.0	1.1	4.6	35.6	1.2	5.1	29.7	1.2	5.7
145	218.2	0.7	1.4	150.1	0.8	1.9	112.4	0.8	2.4	86.8	0.9	2.9	68.3	0.9	3.4	54.7	1.0	4.0	44.6	1.1	4.6	36.8	1.2	5.1	30.7	1.2	5.7
150	225.7	0.7	1.4	155.2	0.8	1.9	116.3	0.8	2.4	89.8	0.9	2.9	70.7	0.9	3.4	56.6	1.0	4.0	46.1	1.1	4.6	38.1	1.2	5.1	31.8	1.2	5.7

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 4.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	8.5	0.6	1.4	5.9	0.7	1.8	4.1	0.8	2.3																		
10	17.2	0.6	1.4	12.1	0.7	1.8	8.8	0.7	2.3	6.7	0.8	2.8	5.2	0.9	3.3	3.8	1.0	3.9									
15	25.8	0.6	1.4	18.1	0.7	1.8	13.4	0.7	2.3	10.3	0.8	2.8	8.1	0.8	3.4	6.4	0.9	3.9	4.9	1.0	4.5						
20	34.4	0.6	1.4	24.2	0.7	1.8	17.8	0.7	2.3	13.9	0.8	2.8	10.9	0.8	3.4	8.7	0.9	3.9	6.9	1.0	4.5	5.5	1.1	5.0			
25	43.0	0.6	1.4	30.2	0.7	1.9	22.3	0.7	2.3	17.4	0.8	2.8	13.8	0.8	3.3	10.9	0.9	3.9	8.8	1.0	4.5	7.1	1.0	5.1	5.7	1.2	5.6
30	51.6	0.6	1.4	36.3	0.7	1.9	26.7	0.7	2.3	20.8	0.8	2.8	16.5	0.8	3.3	13.2	0.9	3.9	10.7	0.9	4.5	8.7	1.0	5.1	7.1	1.1	5.6
35	60.2	0.6	1.4	42.3	0.7	1.9	31.1	0.7	2.3	24.3	0.8	2.8	19.3	0.8	3.4	15.6	0.9	3.9	12.5	0.9	4.5	10.3	1.0	5.0	8.4	1.1	5.6
40	68.8	0.6	1.4	48.3	0.7	1.9	35.6	0.7	2.3	27.8	0.8	2.8	22.0	0.8	3.4	17.8	0.9	3.9	14.4	0.9	4.5	11.8	1.0	5.0	9.8	1.1	5.7
45	77.4	0.6	1.4	54.4	0.7	1.9	40.0	0.7	2.4	31.2	0.8	2.8	24.8	0.8	3.4	20.0	0.9	3.9	16.4	0.9	4.4	13.3	1.0	5.0	11.1	1.1	5.7
50	86.0	0.6	1.4	60.4	0.7	1.9	44.5	0.7	2.4	34.7	0.8	2.8	27.5	0.8	3.4	22.2	0.9	3.9	18.2	0.9	4.4	14.9	1.0	5.0	12.3	1.1	5.7
55	94.6	0.6	1.4	66.5	0.7	1.9	48.9	0.7	2.4	38.2	0.8	2.8	30.3	0.8	3.4	24.4	0.9	3.9	20.0	0.9	4.4	16.6	1.0	5.0	13.6	1.1	5.7
60	103.2	0.6	1.4	72.5	0.7	1.9	53.4	0.7	2.4	41.7	0.8	2.8	33.0	0.8	3.4	26.6	0.9	3.9	21.8	0.9	4.5	18.1	1.0	5.0	14.9	1.1	5.7
65	111.8	0.6	1.4	78.5	0.7	1.9	57.8	0.7	2.4	45.1	0.8	2.8	35.8	0.8	3.4	28.9	0.9	3.9	23.6	0.9	4.5	19.6	1.0	5.0	16.2	1.1	5.7
70	120.4	0.6	1.4	84.6	0.7	1.9	62.3	0.7	2.4	48.6	0.8	2.8	38.6	0.8	3.4	31.1	0.9	3.9	25.4	0.9	4.5	21.1	1.0	5.0	17.7	1.1	5.6
75	129.0	0.6	1.4	90.6	0.7	1.9	66.7	0.7	2.4	52.1	0.8	2.8	41.3	0.8	3.4	33.3	0.9	3.9	27.2	0.9	4.5	22.6	1.0	5.0	19.0	1.1	5.6
80	137.6	0.6	1.4	96.7	0.7	1.9	71.2	0.7	2.4	55.5	0.8	2.8	44.1	0.8	3.4	35.5	0.9	3.9	29.1	0.9	4.5	24.1	1.0	5.0	20.2	1.1	5.6
85	146.2	0.6	1.4	102.7	0.7	1.9	75.6	0.7	2.4	59.0	0.8	2.8	46.8	0.8	3.4	37.7	0.9	3.9	30.9	0.9	4.5	25.6	1.0	5.0	21.5	1.1	5.6
90	154.8	0.6	1.4	108.7	0.7	1.9	80.0	0.7	2.4	62.5	0.8	2.8	49.6	0.8	3.4	39.9	0.9	3.9	32.7	0.9	4.5	27.1	1.0	5.0	22.8	1.1	5.6
95	163.4	0.6	1.4	114.8	0.7	1.9	84.5	0.7	2.4	65.9	0.8	2.8	52.3	0.8	3.4	42.2	0.9	3.9	34.5	0.9	4.5	28.6	1.0	5.0	24.0	1.1	5.6
100	172.0	0.6	1.4	120.8	0.7	1.9	88.9	0.7	2.4	69.4	0.8	2.8	55.1	0.8	3.4	44.4	0.9	3.9	36.3	0.9	4.5	30.1	1.0	5.0	25.3	1.1	5.6
105	180.6	0.6	1.4	126.9	0.7	1.9	93.4	0.7	2.4	72.9	0.8	2.8	57.8	0.8	3.4	46.6	0.9	3.9	38.1	0.9	4.5	31.6	1.0	5.0	26.5	1.1	5.6
110	189.2	0.6	1.4	132.9	0.7	1.9	97.8	0.7	2.4	76.3	0.8	2.8	60.6	0.8	3.4	48.8	0.9	3.9	39.9	0.9	4.5	33.1	1.0	5.0	27.8	1.1	5.6
115	197.8	0.6	1.4	138.9	0.7	1.9	102.3	0.7	2.4	79.8	0.8	2.8	63.3	0.8	3.4	51.0	0.9	3.9	41.7	0.9	4.5	34.6	1.0	5.0	29.0	1.1	5.6
120	206.4	0.6	1.4	145.0	0.7	1.9	106.7	0.7	2.4	83.3	0.8	2.8	66.1	0.8	3.4	53.3	0.9	3.9	43.6	0.9	4.5	36.1	1.0	5.0	30.2	1.1	5.7
125	215.0	0.6	1.4	151.0	0.7	1.9	111.2	0.7	2.4	86.8	0.8	2.8	68.8	0.8	3.4	55.5	0.9	3.9	45.4	0.9	4.5	37.6	1.0	5.0	31.5	1.1	5.7
130	223.7	0.6	1.4	157.1	0.7	1.9	115.6	0.7	2.4	90.2	0.8	2.8	71.6	0.8	3.4	57.7	0.9	3.9	47.2	0.9	4.5	39.1	1.0	5.0	32.7	1.1	5.7
135	232.3	0.6	1.4	163.1	0.7	1.9	120.1	0.7	2.4	93.7	0.8	2.8	74.3	0.8	3.4	59.9	0.9	3.9	49.0	0.9	4.5	40.6	1.0	5.0	34.0	1.1	5.7
140	240.9	0.6	1.4	169.1	0.7	1.9	124.5	0.7	2.4	97.2	0.8	2.8	77.1	0.8	3.4	62.1	0.9	3.9	50.8	0.9	4.5	42.1	1.0	5.0	35.2	1.1	5.7
145	249.5	0.6	1.4	175.2	0.7	1.9	129.0	0.7	2.4	100.6	0.8	2.8	79.8	0.8	3.4	64.3	0.9	3.9	52.6	0.9	4.5	43.6	1.0	5.0	36.5	1.1	5.7
150	258.1	0.6	1.4	181.2	0.7	1.9	133.4	0.7	2.4	104.1	0.8	2.8	82.6	0.8	3.4	66.6	0.9	3.9	54.4	0.9	4.5	45.1	1.0	5.0	37.8	1.1	5.7

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 5.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	9.5	0.6	1.4	6.7	0.6	1.8	4.7	0.7	2.3	3.5	0.8	2.8															
10	19.0	0.6	1.4	13.7	0.6	1.8	9.7	0.7	2.3	7.6	0.7	2.8	6.0	0.8	3.3	4.7	0.8	3.8	3.4	1.0	4.4						
15	28.5	0.6	1.4	20.5	0.6	1.8	14.8	0.7	2.3	11.7	0.7	2.8	9.2	0.7	3.3	7.3	0.8	3.8	5.9	0.9	4.4	4.7	1.0	5.0			
20	38.0	0.6	1.4	27.3	0.6	1.8	19.7	0.7	2.3	15.5	0.7	2.8	12.4	0.7	3.3	9.9	0.8	3.8	8.0	0.9	4.4	6.5	0.9	4.9	5.3	1.0	5.5
25	47.5	0.6	1.4	34.1	0.6	1.8	24.6	0.7	2.3	19.4	0.7	2.8	15.5	0.7	3.3	12.6	0.8	3.8	10.1	0.8	4.4	8.3	0.9	5.0	6.8	1.0	5.6
30	57.0	0.6	1.4	40.9	0.6	1.8	29.5	0.7	2.3	23.3	0.7	2.8	18.6	0.7	3.3	15.1	0.8	3.8	12.2	0.8	4.4	10.1	0.9	5.0	8.3	1.0	5.6
35	66.5	0.6	1.4	47.7	0.6	1.8	34.4	0.7	2.3	27.2	0.7	2.8	21.7	0.7	3.3	17.6	0.8	3.8	14.5	0.8	4.4	11.8	0.9	5.0	9.8	1.0	5.6
40	76.0	0.6	1.4	54.6	0.6	1.8	39.4	0.7	2.3	31.0	0.7	2.8	24.8	0.7	3.3	20.1	0.8	3.8	16.5	0.8	4.4	13.6	0.9	5.0	11.3	1.0	5.5
45	85.5	0.6	1.4	61.4	0.6	1.8	44.3	0.7	2.3	34.9	0.7	2.8	27.9	0.7	3.3	22.6	0.8	3.8	18.6	0.8	4.4	15.5	0.9	4.9	12.8	1.0	5.5
50	95.0	0.6	1.4	68.2	0.6	1.8	49.2	0.7	2.3	38.8	0.7	2.8	31.0	0.7	3.3	25.1	0.8	3.8	20.6	0.8	4.4	17.2	0.9	4.9	14.3	1.0	5.5
55	104.6	0.6	1.4	75.0	0.6	1.8	54.1	0.7	2.3	42.7	0.7	2.8	34.1	0.7	3.3	27.6	0.8	3.8	22.7	0.8	4.4	18.9	0.9	4.9	15.9	0.9	5.5
60	114.1	0.6	1.4	81.8	0.6	1.8	59.0	0.7	2.3	46.6	0.7	2.8	37.2	0.7	3.3	30.1	0.8	3.8	24.7	0.8	4.4	20.6	0.9	4.9	17.3	0.9	5.5
65	123.6	0.6	1.4	88.6	0.6	1.8	63.9	0.7	2.3	50.4	0.7	2.8	40.3	0.7	3.3	32.6	0.8	3.8	26.8	0.8	4.4	22.3	0.9	4.9	18.8	0.9	5.5
70	133.1	0.6	1.4	95.5	0.6	1.8	68.9	0.7	2.3	54.3	0.7	2.8	43.4	0.7	3.3	35.1	0.8	3.8	28.9	0.8	4.4	24.0	0.9	4.9	20.2	0.9	5.5
75	142.6	0.6	1.4	102.3	0.6	1.8	73.8	0.7	2.3	58.2	0.7	2.8	46.5	0.7	3.3	37.7	0.8	3.8	30.9	0.8	4.4	25.7	0.9	4.9	21.6	0.9	5.5
80	152.1	0.6	1.4	109.1	0.6	1.8	78.7	0.7	2.3	62.1	0.7	2.8	49.6	0.7	3.3	40.2	0.8	3.8	33.0	0.8	4.4	27.4	0.9	4.9	23.1	0.9	5.5
85	161.6	0.6	1.4	115.9	0.6	1.8	83.6	0.7	2.3	65.9	0.7	2.8	52.7	0.7	3.3	42.7	0.8	3.8	35.0	0.8	4.4	29.1	0.9	5.0	24.5	0.9	5.5
90	171.1	0.6	1.4	122.7	0.6	1.8	88.5	0.7	2.3	69.8	0.7	2.8	55.8	0.7	3.3	45.2	0.8	3.8	37.1	0.8	4.4	30.9	0.9	5.0	26.0	0.9	5.5
95	180.6	0.6	1.4	129.6	0.6	1.8	93.4	0.7	2.3	73.7	0.7	2.8	58.9	0.7	3.3	47.7	0.8	3.8	39.2	0.8	4.4	32.6	0.9	5.0	27.4	0.9	5.5
100	190.1	0.6	1.4	136.4	0.6	1.8	98.4	0.7	2.3	77.6	0.7	2.8	62.0	0.7	3.3	50.2	0.8	3.8	41.2	0.8	4.4	34.3	0.9	5.0	28.8	0.9	5.5
105	199.6	0.6	1.4	143.2	0.6	1.8	103.3	0.7	2.3	81.5	0.7	2.8	65.1	0.7	3.3	52.7	0.8	3.8	43.3	0.8	4.4	36.0	0.9	5.0	30.3	0.9	5.5
110	209.1	0.6	1.4	150.0	0.6	1.8	108.2	0.7	2.3	85.3	0.7	2.8	68.2	0.7	3.3	55.2	0.8	3.8	45.3	0.8	4.4	37.7	0.9	5.0	31.7	0.9	5.5
115	218.6	0.6	1.4	156.8	0.6	1.8	113.1	0.7	2.3	89.2	0.7	2.8	71.3	0.7	3.3	57.7	0.8	3.8	47.4	0.8	4.4	39.4	0.9	5.0	33.2	0.9	5.5
120	228.1	0.6	1.4	163.6	0.6	1.8	118.0	0.7	2.3	93.1	0.7	2.8	74.3	0.7	3.3	60.2	0.8	3.8	49.5	0.8	4.4	41.1	0.9	5.0	34.6	0.9	5.5
125	237.6	0.6	1.4	170.5	0.6	1.8	123.0	0.7	2.3	97.0	0.7	2.8	77.4	0.7	3.3	62.7	0.8	3.8	51.5	0.8	4.4	42.8	0.9	5.0	36.0	0.9	5.5
130	247.1	0.6	1.4	177.3	0.6	1.8	127.9	0.7	2.3	100.8	0.7	2.8	80.5	0.7	3.3	65.2	0.8	3.8	53.6	0.8	4.4	44.6	0.9	5.0	37.5	0.9	5.5
135	256.6	0.6	1.4	184.1	0.6	1.8	132.8	0.7	2.3	104.7	0.7	2.8	83.6	0.7	3.3	67.8	0.8	3.8	55.6	0.8	4.4	46.3	0.9	5.0	38.9	0.9	5.5
140	266.1	0.6	1.4	190.9	0.6	1.8	137.7	0.7	2.3	108.6	0.7	2.8	86.7	0.7	3.3	70.3	0.8	3.8	57.7	0.8	4.4	48.0	0.9	5.0	40.4	0.9	5.5
145	275.6	0.6	1.4	197.7	0.6	1.8	142.6	0.7	2.3	112.5	0.7	2.8	89.8	0.7	3.3	72.8	0.8	3.8	59.8	0.8	4.4	49.7	0.9	5.0	41.8	0.9	5.5
150	285.1	0.6	1.4	204.6	0.6	1.8	147.5	0.7	2.3	116.4	0.7	2.8	92.9	0.7	3.3	75.3	0.8	3.8	61.8	0.8	4.4	51.4	0.9	5.0	43.2	0.9	5.5

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D". TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 6.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	10.6	0.5	1.3	7.3	0.6	1.8	5.3	0.6	2.3	4.0	0.7	2.8	2.9	0.8	3.2												
10	21.1	0.5	1.3	14.7	0.6	1.8	10.9	0.6	2.3	8.4	0.7	2.8	6.6	0.7	3.2	5.3	0.8	3.8	4.2	0.8	4.3						
15	31.6	0.5	1.3	22.1	0.6	1.8	16.3	0.6	2.3	12.7	0.6	2.7	10.1	0.7	3.3	8.2	0.7	3.8	6.6	0.8	4.3	5.4	0.9	4.9	4.3	1.0	5.5
20	42.1	0.5	1.3	29.5	0.6	1.8	21.7	0.6	2.3	17.0	0.6	2.7	13.6	0.7	3.2	1..1	0.7	3.7	9.0	0.8	4.3	7.4	0.8	4.9	6.1	0.9	5.5
25	52.7	0.5	1.3	36.8	0.6	1.8	27.1	0.6	2.3	21.2	0.6	2.8	17.0	0.7	3.2	13.9	0.7	3.8	11.3	0.8	4.3	9.3	0.8	4.9	7.8	0.9	5.5
30	63.2	0.5	1.3	44.2	0.6	1.8	32.5	0.6	2.3	25.4	0.6	2.8	20.4	0.7	3.2	16.6	0.7	3.8	13.7	0.8	4.3	11.3	0.8	4.9	9.4	0.9	5.5
35	73.7	0.5	1.3	51.6	0.6	1.8	38.0	0.6	2.3	29.7	0.6	2.8	23.8	0.7	3.2	19.4	0.7	3.8	16.0	0.8	4.3	13.4	0.8	4.9	11.1	0.9	5.5
40	84.2	0.5	1.3	58.9	0.6	1.8	43.4	0.6	2.3	33.9	0.6	2.8	27.2	0.7	3.3	22.2	0.7	3.8	18.3	0.8	4.3	15.3	0.8	4.9	12.7	0.9	5.5
45	94.8	0.5	1.3	66.3	0.6	1.8	48.8	0.6	2.3	38.2	0.6	2.8	30.7	0.7	3.3	24.9	0.7	3.8	20.6	0.8	4.3	17.2	0.8	4.9	14.5	0.9	5.4
50	105.3	0.5	1.3	73.6	0.6	1.8	54.2	0.6	2.3	42.4	0.6	2.8	34.1	0.7	3.3	27.7	0.7	3.8	22.8	0.8	4.3	19.1	0.8	4.9	16.1	0.9	5.4
55	115.8	0.5	1.3	81.0	0.6	1.8	59.7	0.6	2.3	46.6	0.6	2.8	37.5	0.7	3.3	30.5	0.7	3.8	25.1	0.8	4.3	21.0	0.8	4.9	17.7	0.9	5.4
60	126.4	0.5	1.3	88.4	0.6	1.8	65.1	0.6	2.3	50.9	0.6	2.8	40.9	0.7	3.3	33.3	0.7	3.8	27.4	0.8	4.3	22.9	0.8	4.9	19.3	0.9	5.4
65	136.9	0.5	1.3	95.7	0.6	1.8	70.5	0.6	2.3	55.1	0.6	2.8	44.3	0.7	3.3	36.0	0.7	3.8	29.7	0.8	4.3	24.8	0.8	4.9	2C.9	0.9	5.4
70	147.4	0.5	1.3	103.1	0.6	1.8	75.9	0.6	2.3	59.3	0.6	2.8	47.7	0.7	3.3	38.8	0.7	3.8	32.0	0.8	4.3	26.7	0.8	4.9	22.5	0.9	5.4
75	158.0	0.5	1.3	110.5	0.6	1.8	81.3	0.6	2.3	63.6	0.6	2.8	51.1	0.7	3.3	41.6	0.7	3.8	34.3	0.8	4.3	28.6	0.8	4.9	24.1	0.9	5.4
80	168.5	0.5	1.3	117.8	0.6	1.8	86.8	0.6	2.3	67.8	0.6	2.8	54.5	0.7	3.3	44.3	0.7	3.8	36.5	0.8	4.3	30.5	0.8	4.9	25.7	0.9	5.5
85	179.0	0.5	1.3	125.2	0.6	1.8	92.2	0.6	2.3	72.0	0.6	2.8	57.9	0.7	3.3	47.1	0.7	3.8	38.8	0.8	4.3	32.4	0.8	4.9	27.3	0.9	5.5
90	189.6	0.5	1.3	132.6	0.6	1.8	97.6	0.6	2.3	76.3	0.6	2.8	61.3	0.7	3.3	49.9	0.7	3.8	41.1	0.8	4.3	34.3	0.8	4.9	28.9	0.9	5.5
95	200.1	0.5	1.3	139.9	0.6	1.8	103.0	0.6	2.3	80.5	0.6	2.8	64.7	0.7	3.3	52.6	0.7	3.8	43.4	0.8	4.3	36.2	0.8	4.9	30.5	0.9	5.5
100	210.6	0.5	1.3	147.3	0.6	1.8	108.5	0.6	2.3	84.8	0.6	2.8	68.1	0.7	3.3	55.4	0.7	3.8	45.7	0.8	4.3	38.1	0.8	4.9	32.1	0.9	5.5
105	221.1	0.5	1.3	154.6	0.6	1.8	113.9	0.6	2.3	89.0	0.6	2.8	71.5	0.7	3.3	58.2	0.7	3.8	47.9	0.8	4.3	40.0	0.8	4.9	33.7	0.9	5.5
110	231.7	0.5	1.3	162.0	0.6	1.8	119.3	0.6	2.3	93.2	0.6	2.8	74.9	0.7	3.3	60.9	0.7	3.8	50.2	0.8	4.3	41.9	0.8	4.9	35.3	0.9	5.5
115	242.2	0.5	1.3	169.4	0.6	1.8	124.7	0.6	2.3	97.5	0.6	2.8	78.3	0.7	3.3	63.7	0.7	3.8	52.5	0.8	4.3	43.8	0.8	4.9	36.9	0.9	5.5
120	252.7	0.5	1.3	176.7	0.6	1.8	130.2	0.6	2.3	101.7	0.6	2.8	81.7	0.7	3.3	66.5	0.7	3.8	54.8	0.8	4.3	45.7	0.8	4.9	38.5	0.9	5.5
125	263.3	0.5	1.3	184.1	0.6	1.8	135.6	0.6	2.3	106.0	0.6	2.8	85.1	0.7	3.3	69.3	0.7	3.8	57.1	0.8	4.3	47.6	0.8	4.9	40.1	0.9	5.5
130	273.8	0.5	1.3	191.5	0.6	1.8	141.0	0.6	2.3	110.2	0.6	2.8	88.5	0.7	3.3	72.0	0.7	3.8	59.4	0.8	4.3	49.5	0.8	4.9	41.7	0.9	5.5
135	284.3	0.5	1.3	198.8	0.6	1.8	146.4	0.6	2.3	114.4	0.6	2.8	91.9	0.7	3.3	74.8	0.7	3.8	61.6	0.8	4.3	51.4	0.8	4.9	43.3	0.9	5.5
140	294.9	0.5	1.3	206.2	0.6	1.8	151.8	0.6	2.3	118.7	0.6	2.8	95.3	0.7	3.3	77.6	0.7	3.8	63.9	0.8	4.3	53.3	0.8	4.9	44.9	0.9	5.5
145	305.4	0.5	1.3	213.6	0.6	1.8	157.3	0.6	2.3	122.9	0.6	2.8	98.7	0.7	3.3	80.3	0.7	3.8	66.2	0.8	4.3	55.2	0.8	4.9	46.5	0.9	5.5
150	315.9	0.5	1.3	220.9	0,6	1.8	162.7	0.6	2.3	127.1	0.6	2.8	102.1	0.7	3.3	83.1	0.7	3.8	68.5	0.8	4.3	57.1	0.8	4.9	48.1	0.9	5.5

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 8.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	12.0	0.5	1.3	8.5	0.5	1.7	6.2	0.5	2.2	4.6	0.6	2.7	3.7	0.6	3.2	2.9	0.7	3.6									
10	24.1	0.5	1.3	16.9	0.5	1.7	12.6	0.5	2.2	9.6	0.6	2.7	7.8	0.6	3.2	6.3	0.6	3.7	5.1	0.7	4.2	4.2	0.8	4.8	3.2	0.9	5.3
15	36.1	0.5	1.3	25.3	0.5	1.7	18.9	0.5	2.2	14.4	0.6	2.7	11.8	0.6	3.2	9.7	0.6	3.7	7.9	0.7	4.2	6.5	0.7	4.8	5.4	0.8	5.3
20	48.1	0.5	1.3	33.8	0.5	1.7	25.2	0.5	2.2	19.2	0.6	2.7	15.8	0.6	3.2	12.9	0.6	3.7	10.7	0.7	4.2	8.8	0.7	4.8	7.4	0.8	5.3
25	60.1	0.5	1.3	42.2	0.5	1.7	31.5	0.5	2.2	24.0	0.6	2.7	19.7	0.6	3.2	16.2	0.6	3.7	13.4	0.7	4.2	11.2	0.7	4.7	9.3	0.8	5.3
30	72.1	0.5	1.3	50.6	0.5	1.7	37.8	0.5	2.2	28.8	0.6	2.7	23.6	0.6	3.2	19.4	0.6	3.7	16.1	0.7	4.2	13.5	0.7	4.8	11.3	0.7	5.3
35	84.1	0.5	1.3	59.1	0.5	1.7	44.1	0.5	2.2	33.6	0.6	2.7	27.6	0.6	3.2	22.6	0.6	3.7	18.7	0.7	4.2	15.7	0.7	4.8	13.3	0.7	5.3
40	96.2	0.5	1.3	67.5	0.5	1.7	50.4	0.5	2.2	38.4	0.6	2.7	31.5	0.6	3.2	25.8	0.6	3.7	21.4	0.7	4.2	17.9	0.7	4.8	15.2	0.7	5.3
45	108.2	0.5	1.3	76.0	0.5	1.7	56.7	0.5	2.2	43.2	0.6	2.7	35.4	0.6	3.2	29.0	0.6	3.7	24.1	0.7	4.2	20.2	0.7	4.8	17.1	0.7	5.3
50	120.2	0.5	1.3	84.4	0.5	1.7	63.0	0.5	2.2	48.0	0.6	2.7	39.4	0.6	3.2	32.3	0.6	3.7	26.8	0.7	4.2	22.4	0.7	4.8	19.0	0.7	5.3
55	132.2	0.5	1.3	92.8	0.5	1.7	69.3	0.5	2.2	52.8	0.6	2.7	43.3	0.6	3.2	35.5	0.6	3.7	29.4	0.7	4.2	24.7	0.7	4.8	20.9	0.7	5.3
60	144.2	0.5	1.3	101.3	0.5	1.7	75.6	0.5	2.2	57.6	0.6	2.7	47.2	0.6	3.2	38.7	0.6	3.7	32.1	0.7	4.2	26.9	0.7	4.8	22.8	0.7	5.3
65	156.3	0.5	1.3	109.7	0.5	1.7	81.8	0.5	2.2	62.4	0.6	2.7	51.2	0.6	3.2	41.9	0.6	3.7	34.8	0.7	4.2	29.1	0.7	4.8	24.7	0.7	5.3
70	168.3	0.5	1.3	118.2	0.5	1.7	88.1	0.5	2.2	67.2	0.6	2.7	55.1	0.6	3.2	45.2	0.6	3.7	37.5	0.7	4.2	31.4	0.7	4.8	26.6	0.7	5.3
75	180.3	0.5	1.3	126.6	0.5	1.7	94.4	0.5	2.2	72.0	0.6	2.7	59.0	0.6	3.2	48.4	0.6	3.7	40.1	0.7	4.2	33.6	0.7	4.8	28.5	0.7	5.3
80	192.3	0.5	1.3	135.0	0.5	1.7	100.7	0.5	2.2	76.8	0.6	2.7	63.0	0.6	3.2	51.6	0.6	3.7	42.8	0.7	4.2	35.9	0.7	4.8	30.3	0.7	5.3
85	204.3	0.5	1.3	143.5	0.5	1.7	107.0	0.5	2.2	81.6	0.6	2.7	66.9	0.6	3.2	54.9	0.6	3.7	45.5	0.7	4.2	38.1	0.7	4.8	32.2	0.7	5.3
90	216.4	0.5	1.3	151.9	0.5	1.7	113.3	0.5	2.2	86.4	0.6	2.7	70.8	0.6	3.2	58.1	0.6	3.7	48.1	0.7	4.2	40.3	0.7	4.8	34.1	0.7	5.3
95	228.4	0.5	1.3	160.3	0.5	1.7	119.6	0.5	2.2	91.2	0.6	2.7	74.8	0.6	3.2	61.3	0.6	3.7	50.8	0.7	4.2	42.6	0.7	4.8	36.0	0.7	5.3
100	240.4	0.5	1.3	168.8	0.5	1.7	125.9	0.5	2.2	96.0	0.6	2.7	78.7	0.6	3.2	64.5	0.6	3.7	53.5	0.7	4.2	44.8	0.7	4.8	37.9	0.7	5.3
105	252.4	0.5	1.3	177.2	0.5	1.7	132.2	0.5	2.2	100.8	0.6	2.7	82.6	0.6	3.2	67.8	0.6	3.7	56.2	0.7	4.2	47.1	0.7	4.8	39.8	0.7	5.3
110	264.4	0.5	1.3	185.7	0.5	1.7	138.5	0.5	2.2	105.6	0.6	2.7	86.6	0.6	3.2	71.0	0.6	3.7	58.8	0.7	4.2	49.3	0.7	4.8	41.7	0.7	5.3
115	276.5	0.5	1.3	194.1	0.5	1.7	144.8	0.5	2.2	110.4	0.6	2.7	90.5	0.6	3.2	74.2	0.6	3.7	61.5	0.7	4.2	51.5	0.7	4.8	43.6	0.7	5.3
120	288.5	0.5	1.3	202.5	0.5	1.7	151.1	0.5	2.2	115.2	0.6	2.7	94.4	0.6	3.2	77.4	0.6	3.7	64.2	0.7	4.2	53.8	0.7	4.8	45.5	0.7	5.3
125	300.5	0.5	1.3	211.0	0.5	1.7	157.4	0.5	2.2	120.0	0.6	2.7	98.4	0.6	3.2	80.7	0.6	3.7	66.9	0.7	4.2	56.0	0.7	4.8	47.4	0.7	5.3
130	312.5	0.5	1.3	219.4	0.5	1.7	163.7	0.5	2.2	124.8	0.6	2.7	102.3	0.6	3.2	83.9	0.6	3.7	69.5	0.7	4.2	58.3	0.7	4.8	49.3	0.7	5.3
135	324.5	0.5	1.3	227.9	0.5	1.7	170.0	0.5	2.2	129.6	0.6	2.7	106.2	0.6	3.2	87.1	0.6	3.7	72.2	0.7	4.2	60.5	0.7	4.8	51.2	0.7	5.3
140	336.6	0.5	1.3	236.3	0.5	1.7	176.3	0.5	2.2	134.4	0.6	2.7	110.2	0.6	3.2	90.3	0.6	3.7	74.9	0.7	4.2	62.7	0.7	4.8	53.1	0.7	5.3
145	348.6	0.5	1.3	244.7	0.5	1.7	182.6	0.5	2.2	139.2	0.6	2.7	114.1	0.6	3.2	93.6	0.6	3.7	77.6	0.7	4.2	65.0	0.7	4.8	55.0	0.7	5.3
150	360.6	0.5	1.3	253.2	0.5	1.7	188.9	0.5	2.2	144.0	0.6	2.7	118.0	0.6	3.2	96.8	0.6	3.7	80.2	0.7	4.2	67.2	0.7	4.8	56.9	0.7	5.3

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

V1 FOR RETARDANCE "D", TOP WIDTH (T), DEPTH' (D) AND V2 FOR RETARDANCE "C"

GRADE 10.00 PERCENT

Q CFS	V1=2.0			V1=2.5			V1=3.0			V1=3.5			V1=4.0			V1=4.5			V1=5.0			V1=5.5			V1=6.0		
	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2	T	D	V2
5	13.3	0.4	1.3	9.4	0.5	1.7	6.8	0.5	2.2	5.3	0.5	2.6	4.1	0.6	3.2	3.4	0.6	3.6	2.6	0.7	4.1						
10	26.6	0.4	1.3	18.7	0.5	1.7	13.8	0.5	2.2	10.9	0.5	2.6	8.5	0.6	3.2	7.1	0.6	3.6	5.9	0.6	4.1	4.9	0.7	4.7	4.0	0.7	5.3
15	39.9	0.4	1.3	28.0	0.5	1.7	20.7	0.5	2.2	16.3	0.5	2.6	12.8	0.6	3.2	10.9	0.6	3.6	9.0	0.6	4.1	7.5	0.6	4.7	6.3	0.7	5.2
20	53.2	0.4	1.3	37.4	0.5	1.7	27.6	0.5	2.2	21.7	0.5	2.7	17.0	0.6	3.2	14.5	0.6	3.6	12.1	0.6	4.1	10.2	0.6	4.6	8.5	0.7	5.2
25	66.5	0.4	1.3	46.7	0.5	1.7	34.5	0.5	2.2	27.1	0.5	2.7	21.3	0.6	3.2	18.1	0.6	3.6	15.1	0.6	4.1	12.7	0.6	4.7	10.8	0.7	5.2
30	79.8	0.4	1.3	56.1	0.5	1.7	41.4	0.5	2.2	32.5	0.5	2.7	25.5	0.6	3.2	21.7	0.6	3.6	18.1	0.6	4.1	15.2	0.6	4.7	12.9	0.7	5.2
35	93.1	0.4	1.3	65.4	0.5	1.7	48.3	0.5	2.2	37.9	0.5	2.7	29.8	0.6	3.2	25.3	0.6	3.6	21.1	0.6	4.1	17.8	0.6	4.7	15.1	0.7	5.2
40	106.4	0.4	1.3	74.7	0.5	1.7	55.2	0.5	2.2	43.3	0.5	2.7	34.0	0.6	3.2	29.0	0.6	3.6	24.1	0.6	4.1	20.3	0.6	4.7	17.2	0.7	5.2
45	119.7	0.4	1.3	84.1	0.5	1.7	62.1	0.5	2.2	48.8	0.5	2.7	38.3	0.6	3.2	32.6	0.6	3.6	27.2	0.6	4.1	22.8	0.6	4.7	19.4	0.7	5.2
50	133.0	0.4	1.3	93.4	0.5	1.7	69.0	0.5	2.2	54.2	0.5	2.7	42.5	0.6	3.2	36.2	0.6	3.6	30.2	0.6	4.1	25.4	0.6	4.7	21.5	0.7	5.2
55	146.3	0.4	1.3	102.8	0.5	1.7	75.9	0.5	2.2	59.6	0.5	2.7	46.8	0.6	3.2	39.8	0.6	3.6	33.2	0.6	4.1	27.9	0.6	4.7	23.7	0.7	5.2
60	159.6	0.4	1.3	112.1	0.5	1.7	82.8	0.5	2.2	65.0	0.5	2.7	51.0	0.6	3.2	43.4	0.6	3.6	36.2	0.6	4.1	30.5	0.6	4.7	25.9	0.7	5.2
65	172.9	0.4	1.3	121.4	0.5	1.7	89.7	0.5	2.2	70.4	0.5	2.7	55.3	0.6	3.2	47.1	0.6	3.6	39.2	0.6	4.1	33.0	0.6	4.7	28.0	0.7	5.2
70	186.2	0.4	1.3	130.8	0.5	1.7	96.6	0.5	2.2	75.8	0.5	2.7	59.5	0.6	3.2	50.7	0.6	3.6	42.2	0.6	4.1	35.5	0.6	4.7	30.2	0.7	5.2
75	199.5	0.4	1.3	140.1	0.5	1.7	103.5	0.5	2.2	81.2	0.5	2.7	63.8	0.6	3.2	54.3	0.6	3.6	45.2	0.6	4.1	38.1	0.6	4.7	32.3	0.7	5.2
80	212.8	0.4	1.3	149.5	0.5	1.7	110.5	0.5	2.2	86.7	0.5	2.7	68.0	0.6	3.2	57.9	0.6	3.6	48.3	0.6	4.1	40.6	0.6	4.7	34.5	0.7	5.2
85	226.1	0.4	1.3	158.8	0.5	1.7	117.4	0.5	2.2	92.1	0.5	2.7	72.3	0.6	3.2	61.5	0.6	3.6	51.3	0.6	4.1	43.1	0.6	4.7	36.6	0.7	5.2
90	239.4	0.4	1.3	168.1	0.5	1.7	124.3	0.5	2.2	97.5	0.5	2.7	76.5	0.6	3.2	65.2	0.6	3.6	54.3	0.6	4.1	45.7	0.6	4.7	38.8	0.7	5.2
95	252.7	0.4	1.3	177.5	0.5	1.7	131.2	0.5	2.2	102.9	0.5	2.7	80.8	0.6	3.2	68.8	0.6	3.6	57.3	0.6	4.1	48.2	0.6	4.7	40.9	0.7	5.2
100	266.0	0.4	1.3	186.8	0.5	1.7	138.1	0.5	2.2	108.3	0.5	2.7	85.0	0.6	3.2	72.4	0.6	3.6	60.3	0.6	4.1	50.7	0.6	4.7	43.1	0.7	5.2
105	279.3	0.4	1.3	196.2	0.5	1.7	145.0	0.5	2.2	113.7	0.5	2.7	89.3	0.6	3.2	76.0	0.6	3.6	63.3	0.6	4.1	53.3	0.6	4.7	45.2	0.7	5.2
110	292.6	0.4	1.3	205.5	0.5	1.7	151.9	0.5	2.2	119.2	0.5	2.7	93.5	0.6	3.2	79.6	0.6	3.6	66.4	0.6	4.1	55.8	0.6	4.7	47.4	0.7	5.2
115	305.9	0.4	1.3	214.9	0.5	1.7	158.8	0.5	2.2	124.6	0.5	2.7	97.8	0.6	3.2	83.3	0.6	3.6	69.4	0.6	4.1	58.3	0.6	4.7	49.5	0.7	5.3
120	319.2	0.4	1.3	224.2	0.5	1.7	165.7	0.5	2.2	130.0	0.5	2.7	102.0	0.6	3.2	86.9	0.6	3.6	72.4	0.6	4.1	60.9	0.6	4.7	51.7	0.7	5.3
125	332.5	0.4	1.3	233.5	0.5	1.7	172.6	0.5	2.2	135.4	0.5	2.7	106.3	0.6	3.2	90.5	0.6	3.6	75.4	0.6	4.1	63.4	0.6	4.7	53.8	0.7	5.3
130	345.8	0.4	1.3	242.9	0.5	1.7	179.5	0.5	2.2	140.8	0.5	2.7	110.5	0.6	3.2	94.1	0.6	3.6	78.4	0.6	4.1	66.0	0.6	4.7	56.0	0.7	5.3
135	359.1	0.4	1.3	252.2	0.5	1.7	186.4	0.5	2.2	146.2	0.5	2.7	114.8	0.6	3.2	97.7	0.6	3.6	81.4	0.6	4.1	68.5	0.6	4.7	58.1	0.7	5.3
140	372.4	0.4	1.3	261.6	0.5	1.7	193.3	0.5	2.2	151.7	0.5	2.7	119.0	0.6	3.2	101.3	0.6	3.6	84.4	0.6	4.1	71.0	0.6	4.7	60.3	0.7	5.3
145	385.7	0.4	1.3	270.9	0.5	1.7	200.2	0.5	2.2	157.1	0.5	2.7	123.3	0.6	3.2	105.0	0.6	3.6	87.5	0.6	4.1	73.6	0.6	4.7	62.5	0.7	5.3
150	399.0	0.4	1.3	280.2	0.5	1.7	207.1	0.5	2.2	162.5	0.5	2.7	127.5	0.6	3.2	108.6	0.6	3.6	90.5	0.6	4.1	76.1	0.6	4.7	64.6	0.7	5.3

EXHIBIT 9-2 PARABOLIC DIVERSION DESIGN CHART
(RETARDANCE "D" AND "C")

(Based on Handbook of Channel Design, SCS-TP-61)

● 3:1 Side Slopes
"D" Retardance

Grade	Triangular								6' bottom width								8' bottom width							
	0.2		0.3		0.4		0.5		0.2		0.3		0.4		0.5		0.2		0.3		0.4		0.5	
Q-cfs	d	A	d	A	d	A	d	A	d	A	d	A	d	A	d	A	d	A	d	A	d	A	d	A
10	1.9	11	1.8	10	1.7	9	1.6	8	1.3	12	1.1	10	1.0	9	0.9	8	1.2	13	1.1	11	1.0	10	0.9	9
20	2.2	15	2.1	13	1.9	11	1.8	10	1.5	16	1.4	14	1.2	12	1.1	10	1.4	17	1.3	16	1.2	14	1.1	12
30	2.5	19	2.3	16	2.2	15	2.0	12	1.8	21	1.6	17	1.5	16	1.3	13	1.7	22	1.5	19	1.4	17	1.2	14
40	2.8	20	2.5	19	2.3	16	2.2	15	2.0	24	1.8	21	1.7	19	1.5	16	1.8	24	1.7	22	1.5	19	1.4	17
60	3.0	27	2.9	24	2.7	22	2.5	19	2.3	30	2.1	26	1.9	22	1.7	19	2.1	30	1.9	26	1.8	24	1.6	21
80			3.1	29	2.9	25	2.7	22	2.5	34	2.3	30	2.1	26	1.9	22	2.4	37	2.2	32	2.0	28	1.8	24
100					3.1	29	2.9	25	2.8	40	2.5	34	2.3	30	2.1	26	2.6	41	2.4	37	2.2	32	2.0	28
120							3.0	27	3.0	45	2.8	40	2.5	34	2.3	30	2.8	46	2.5	39	2.3	34	2.1	30
140											2.9	43	2.6	36	2.4	32	2.9	46	2.7	44	2.5	39	2.3	34
160											3.0	45	2.8	40	2.6	35	3.1	51	2.9	48	2.7	44	2.5	39
180																							2.6	41
200																								
220																								

Grade	8' bottom width				10' bottom width				12' bottom width							
	0.3		0.4		0.5		0.2		0.3		0.4		0.5		0.2	
Q-cfs	d	A	d	A	d	A	d	A	d	A	d	A	d	A	d	A
10	1.1	11	1.0	10	0.9	9	1.1	14	1.0	12	0.9	11	0.8	10	1.0	14
20	1.3	16	1.2	14	1.1	12	1.3	18	1.2	16	1.0	13	0.9	11	1.2	19
30	1.7	19	1.4	17	1.2	14	1.5	22	1.4	20	1.2	16	1.1	15	1.3	21
40	1.8	22	1.5	19	1.4	17	1.7	26	1.5	22	1.4	20	1.2	16	1.6	27
60	2.1	30	1.9	26	1.8	24	2.0	32	1.8	28	1.7	26	1.5	22	1.8	31
80	2.4	37	2.2	32	2.0	28	2.3	39	2.1	34	1.9	30	1.7	26	2.1	36
100	2.6	41	2.4	37	2.2	32	2.4	41	2.2	37	2.1	34	1.9	30	2.3	44
120	2.8	46	2.5	39	2.3	34	2.6	46	2.4	41	2.2	37	2.0	32	2.5	50
140	2.9	48	2.7	44	2.5	39	2.7	49	2.5	44	2.3	39	2.1	34	2.6	52
160	3.1	51	2.9	48	2.7	44	2.9	54	2.7	49	2.5	44	2.3	39	2.7	54
180							3.0	57	2.8	51	2.6	46	2.4	41	2.8	57
200															2.9	60
220															3.0	63

Grade	12' bottom width							
	0.3		0.4		0.5			
Q-cfs	d	A	d	A	d	A		
10	0.9	12	0.8	11	0.7	10		
20	1.1	17	1.0	15	0.9	13		
30	1.2	19	1.2	19	1.1	17		
40	1.5	25	1.3	21	1.2	19		
60	1.6	27	1.5	25	1.3	21		
80	1.9	34	1.8	31	1.6	27		
100	2.1	38	1.9	34	1.7	29		
120	2.3	44	2.1	38	1.9	34		
140	2.6	48	2.4	46	2.2	41		
160	2.8	52	2.6	48	2.4	44		
180	2.9	57	2.6	52	2.4	46		
200	3.0	60	2.7	54	2.5	50		
220	3.0	63	2.8	57	2.7	54		

NOTE: For diversions built on slopes under 2% the available cross-sectional area above normal ground will allow a reduction in design depth as follows:

For land slopes of 1% or less reduce depth of flow (taken from Design Table) 20%.
For land slopes of 1% to 2% reduce depth of flow (taken from Design Table) 10%.
For land slopes greater than 2% use depth of flow taken from Design Table.

For Example: A diversion 6 feet wide with a 2.5 foot depth of flow is required to remove 120 c.f.s. on a 0.4% grade. If this is built on a 1% slope the depth may be reduced 20% thus obtaining a flow depth of 2.0 feet. The required cross-sectional area of the channel plus that above normal ground line will be 34 square feet corresponding to the 2.5 foot depth. The overall height of diversion will be 2.0 feet plus 0.5 foot freeboard or 2.5 feet, instead of the original 3.0 feet.

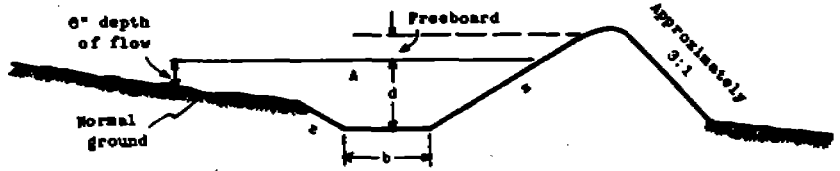

d = depth of flow, feet
b = bottom width of channel, feet
A = channel capacity, sq. ft., including area below 0.5' freeboard and excluding any area less than 0.5' depth of flow
z = side slope of channel (horizontal to vertical)

IMPORTANT: To all designed depths of flow add freeboard required by State Standards and Specifications to obtain overall height of terrace above bottom of channel. For final check on cross-sectional area subtract required freeboard from settled height of diversion and provide for cross-sectional area shown in table.

Exhibit 9-3.—Diversion design table—*D* retardance (V and trapezoidal section).

(Based on Handbook of Channel Design, SCS-TP-61)

● 4:1 Side Slopes
"D" Retardance

Grade	Triangular				6' bottom width				8' bottom width				10' bottom width				12' bottom width			
	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5
Q-cfs	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A
10	1.8 13	1.7 12	1.6 11	1.5 10	1.2 13	1.1 11	1.0 10	0.9 9	1.1 14	1.0 13	0.9 11	0.8 10	1.1 14	1.0 13	0.9 12	0.9 11	1.0 15	0.9 14	0.8 13	0.7 12
20	2.1 18	2.0 16	1.8 13	1.7 12	1.5 18	1.4 16	1.2 13	1.1 11	1.4 19	1.3 17	1.2 15	1.1 14	1.3 20	1.2 18	1.0 14	0.9 12	1.2 20	1.1 18	1.0 16	0.9 14
30	2.4 23	2.2 19	2.1 18	1.9 14	1.8 24	1.6 20	1.5 19	1.3 15	1.7 25	1.5 21	1.4 19	1.2 15	1.5 24	1.4 22	1.2 18	1.1 16	1.3 22	1.2 20	1.2 20	1.1 18
40	2.5 25	2.4 23	2.2 19	2.1 18	1.9 26	1.8 24	1.6 20	1.5 19	1.8 27	1.7 25	1.5 21	1.4 19	1.6 26	1.5 24	1.3 20	1.2 18	1.6 29	1.5 27	1.3 22	1.2 20
60	2.8 31	2.6 27	2.5 25	2.3 21	2.2 33	2.0 28	1.9 26	1.7 22	2.0 32	1.9 30	1.7 25	1.6 23	1.9 33	1.8 31	1.6 26	1.5 24	1.7 32	1.6 29	1.4 25	1.3 22
80	3.1 38	2.9 34	2.7 29	2.5 25	2.4 37	2.2 33	2.1 30	1.9 26	2.3 40	2.1 34	2.0 32	1.8 27	2.2 41	2.0 36	1.8 31	1.6 26	2.0 40	1.9 37	1.7 32	1.6 29
100		3.1 38	2.9 34	2.7 29	2.7 45	2.5 40	2.3 35	2.1 30	2.5 45	2.3 40	2.1 34	1.9 30	2.3 44	2.1 39	2.0 36	1.8 31	2.2 46	2.0 40	1.9 37	1.7 32
120				2.9 31	2.9 51	2.7 45	2.4 37	2.2 33	2.7 51	2.5 45	2.3 40	2.1 34	2.5 50	2.3 44	2.2 41	2.0 36	2.4 52	2.2 46	2.0 40	1.8 35
140					3.0 54	2.9 48	2.6 43	2.4 37	2.8 54	2.6 46	2.5 45	2.3 40	2.6 53	2.4 47	2.3 44	2.1 39	2.5 55	2.3 49	2.2 46	2.0 40
160					3.1 57	2.9 51	2.8 48	2.6 43	3.0 60	2.8 54	2.6 48	2.4 42	2.8 59	2.6 53	2.5 50	2.3 44	2.7 62	2.5 55	2.3 49	2.1 43
180												2.5 45	2.9 63	2.7 56	2.6 53	2.4 47	2.8 65	2.6 58	2.4 52	2.2 46
200																2.5 50	2.9 68	2.7 62	2.5 55	2.3 49
220																	3.0 72	2.8 65	2.6 58	2.4 52

● 6:1 Side Slopes
"D" Retardance

Grade	Triangular				6' bottom width				8' bottom width				10' bottom width				12' bottom width			
	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5
Q-cfs	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A
10	1.6 15	1.5 14	1.4 13	1.3 11	1.2 16	1.1 14	1.0 12	0.9 10	1.1 16	1.0 14	0.9 13	0.8 11	1.1 17	1.0 15	0.9 13	0.8 12	1.0 17	0.9 15	0.8 14	0.7 12
20	1.9 22	1.8 19	1.6 15	1.5 14	1.5 23	1.4 20	1.2 16	1.1 14	1.4 23	1.3 21	1.1 16	1.0 14	1.3 21	1.2 27	1.1 19	1.0 16	1.3 25	1.2 23	1.0 17	0.9 16
30	2.1 27	2.0 24	1.8 19	1.7 17	1.7 28	1.5 23	1.4 20	1.2 16	1.6 28	1.5 26	1.3 21	1.2 18	1.4 26	1.3 23	1.2 20	1.1 18	1.4 29	1.3 27	1.1 20	1.0 18
40	2.3 32	2.2 29	2.0 24	1.8 19	1.8 30	1.7 28	1.5 23	1.4 20	1.7 31	1.6 28	1.4 23	1.3 21	1.5 29	1.4 26	1.3 23	1.2 20	1.5 32	1.4 29	1.3 27	1.2 22
60	2.5 39	2.3 32	2.2 29	2.0 24	2.0 36	1.9 33	1.7 28	1.6 25	1.9 37	1.8 34	1.6 28	1.5 26	1.8 38	1.7 34	1.5 29	1.4 26	1.6 34	1.5 32	1.4 29	1.3 27
80	2.7 44	2.5 39	2.4 35	2.2 29	2.2 42	2.1 39	1.9 33	1.8 30	2.1 43	2.0 40	1.8 34	1.7 31	2.0 44	1.9 41	1.7 34	1.6 31	1.8 41	1.7 37	1.6 34	1.5 32
100	2.9 51	2.7 44	2.6 41	2.4 35	2.4 49	2.2 42	2.1 39	1.9 33	2.3 50	2.1 43	2.0 40	1.9 34	2.2 51	2.0 44	1.9 41	1.7 34	2.1 51	1.9 45	1.8 41	1.6 34
120	3.0 54	2.8 47	2.7 44	2.5 39	2.6 56	2.4 49	2.3 46	2.1 39	2.5 58	2.3 50	2.2 47	2.0 40	2.3 55	2.2 51	2.0 44	1.9 41	2.2 55	2.0 48	1.9 45	1.7 37
140					2.7 61	2.6 56	2.4 49	2.3 46	2.6 61	2.5 58	2.3 50	2.2 47	2.5 63	2.3 55	2.2 51	2.0 44	2.4 64	2.2 55	2.1 51	1.9 45
160					2.9 68	2.8 64	2.6 56	2.5 53	2.8 67	2.6 61	2.5 58	2.3 50	2.7 71	2.5 63	2.4 59	2.2 51	2.6 70	2.4 64	2.3 59	2.1 51
180									2.9 71	2.7 64	2.6 61	2.4 54	2.8 75	2.6 67	2.5 63	2.3 55	2.7 76	2.5 68	2.4 63	2.2 55
200									3.0 72	2.8 67	2.6 61	2.4 54	2.9 79	2.7 77	2.6 67	2.4 59	2.8 81	2.6 72	2.5 66	2.3 59
220												2.5 59				2.4 59	2.9 85	2.7 76	2.5 66	2.3 59
240																2.5 63				2.4 64
260																				2.5 66

Exhibit 9-3.—Diversion design table—D retardance (V and trapezoidal section [continued]).

● 3:1 Side Slopes
"C" Retardance

[Based on Handbook of Channel Design, SCS-TP-61]

	Triangular				6' bottom				8' bottom				10' bottom				12' bottom			
Grade	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5
Q	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A
20	2.5 19	2.3 16	2.1 13	1.9 11	1.9 22	1.7 19	1.5 16	1.4 14	1.7 22	1.5 19	1.4 17	1.3 15	1.6 24	1.4 20	1.3 18	1.2 16				
30		2.5 19	2.3 16	2.2 15	2.0 24	1.8 21	1.7 19	1.5 16	1.9 26	1.7 22	1.5 19	1.4 17	1.7 26	1.5 22	1.4 20	1.3 18	1.6 27	1.4 23	1.3 21	1.2 19
40			2.5 19	2.4 17	2.2 28	2.0 24	1.9 22	1.7 19	2.0 28	1.8 24	1.6 21	1.5 19	1.9 30	1.7 26	1.5 22	1.4 20	1.8 31	1.6 27	1.5 25	1.4 23
50				2.5 19	2.3 30	2.1 26	2.0 24	1.8 21	2.2 32	2.0 28	1.8 24	1.6 21	2.0 32	1.8 28	1.6 24	1.5 22	1.9 34	1.7 29	1.6 27	1.5 25
60					2.5 34	2.3 30	2.1 26	1.9 22	2.3 34	2.1 30	1.9 26	1.8 24	2.2 37	2.0 32	1.8 28	1.6 24	2.0 36	1.8 31	1.7 29	1.6 27
80						2.5 34	2.3 30	2.1 26	2.5 39	2.3 34	2.1 30	1.9 26	2.4 41	2.2 37	2.0 32	1.8 28	2.2 41	2.0 36	1.9 34	1.7 29
100							2.5 34	2.3 30		2.5 39	2.3 34	2.1 30		2.4 41	2.2 37	2.0 32	2.5 48	2.2 41	2.0 36	1.8 31
120								2.5 34			2.5 39	2.3 34			2.3 39	2.1 34		2.4 46	2.2 41	2.0 36
140												2.4 36			2.5 44	2.3 39			2.3 43	2.1 38
160																2.4 41			2.4 46	2.2 41
180																2.5 44				2.4 46
200																				2.5 49
220																				2.6 51

● 4:1 Side Slopes
"C" Retardance

	Triangular				6' bottom width				8' bottom width				10' bottom width				12' bottom width			
Grade	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5
Q	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A
30	2.5 25	2.4 23	2.3 21	2.1 18	2.0 28	1.8 24	1.6 20	1.5 18	1.8 27	1.7 25	1.5 21	1.4 19	1.8 31	1.6 26	1.4 22	1.3 20	1.7 32	1.6 29	1.4 25	1.2 20
40		2.5 25	2.4 23	2.2 19	2.1 30	1.9 26	1.7 22	1.6 20	2.0 32	1.8 27	1.6 23	1.5 21	1.9 33	1.7 29	1.5 24	1.4 22	1.8 35	1.7 32	1.5 27	1.3 22
50			2.5 25	2.4 23	2.3 35	2.1 30	1.9 26	1.7 22	2.1 34	1.9 30	1.7 25	1.6 23	2.0 36	1.8 31	1.6 26	1.5 24	1.9 37	1.8 35	1.6 29	1.4 25
60				2.5 25	2.4 37	2.2 33	2.0 28	1.9 26	2.3 40	2.1 34	1.9 30	1.7 25	2.1 39	1.9 34	1.7 29	1.6 26	2.0 40	1.9 37	1.7 32	1.5 27
80						2.4 37	2.2 33	2.0 28	2.5 45	2.3 40	2.1 34	1.9 30	2.3 44	2.1 39	1.9 34	1.8 31	2.2 46	2.0 40	1.8 35	1.7 32
100						2.5 40	2.3 35	2.2 33		2.5 45	2.3 40	2.0 32	2.5 50	2.3 44	2.1 39	1.9 34	2.3 49	2.1 43	2.0 40	1.8 35
120							2.5 40	2.4 37			2.4 42	2.2 37		2.5 50	2.3 44	2.1 39	2.5 55	2.3 49	2.2 46	2.0 40
140								2.5 40			2.5 45	2.3 40			2.4 47	2.2 41		2.5 55	2.3 49	2.1 43
160												2.5 45			2.5 50	2.3 44			2.4 52	2.2 46
180																2.4 47			2.5 55	2.3 49
200																2.5 50				2.4 52
220																				2.5 55

Exhibit 9-4.—Diversion design table—C retardance (V and trapezoidal section).

(Based on Handbook of Channel Design, SCS-TP-61)

● 6:1 Side Slopes
"C" Retardance

Grade	Triangular				6' bottom width				8' bottom width				10' bottom width				12' bottom width			
	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5	0.2	0.3	0.4	0.5
Q	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A	d A
20	2.2 29	2.1 26	1.9 22	1.8 19	1.8 30	1.7 28	1.6 25	1.4 20	1.7 31	1.6 28	1.5 26	1.3 21	1.6 31	1.5 29	1.4 26	1.2 20	1.5 32	1.4 29	1.3 27	1.2 22
30	2.4 35	2.2 29	2.1 26	1.9 22	2.0 36	1.9 33	1.7 28	1.5 23	1.8 34	1.7 31	1.6 28	1.4 23	1.8 36	1.7 34	1.5 29	1.3 23	1.7 37	1.6 34	1.4 29	1.3 27
40	2.5 39	2.3 32	2.2 29	2.0 24	2.1 39	2.0 36	1.8 30	1.6 25	2.0 40	1.9 37	1.7 31	1.5 26	1.9 41	1.8 38	1.6 31	1.4 26	1.8 41	1.7 37	1.5 32	1.3 27
50		2.5 33	2.3 32	2.1 26	2.2 42	2.1 39	1.9 33	1.7 28	2.1 43	2.0 40	1.8 34	1.6 28	2.0 44	1.9 41	1.7 34	1.5 29	1.9 45	1.8 41	1.6 34	1.4 29
60			2.4 35	2.2 29	2.3 46	2.2 42	2.0 36	1.8 30	2.2 47	2.1 43	1.9 37	1.7 31	2.1 47	2.0 44	1.8 38	1.6 31	2.0 48	1.9 45	1.8 41	1.6 34
80			2.5 38	2.3 32	2.5 53	2.3 46	2.1 39	1.9 33	2.4 54	2.2 47	2.0 40	1.8 34	2.3 55	2.1 47	1.9 41	1.7 34	2.2 55	2.1 52	1.9 45	1.7 37
100				2.5 36		2.5 53	2.3 46	2.1 39	2.5 56	2.4 54	2.2 47	2.0 40	2.4 59	2.3 55	2.1 47	1.9 41	2.3 59	2.2 55	2.0 46	1.8 41
120							2.4 49	2.2 42		2.5 58	2.3 50	2.1 43	2.5 63	2.4 59	2.2 51	2.0 44	2.4 64	2.3 59	2.1 52	1.9 45
140							2.5 53	2.3 46			2.4 54	2.2 47		2.5 63	2.3 55	2.1 47	2.5 68	2.4 64	2.2 55	2.0 48
160								2.4 49			2.5 58	2.3 50			2.4 59	2.2 51		2.5 68	2.3 59	2.1 52
180								2.5 53				2.4 54			2.5 63	2.3 55			2.4 64	2.2 55
200												2.5 58				2.4 59			2.5 68	2.2 55
220																2.5 63				2.3 59

Exhibit 9-4.—Diversion design table—C retardance (V and trapezoidal section [continued]).

*U.S. GOVERNMENT PRINTING OFFICE:1987-180-916:60035/SCS